

# SWPP NOTES

## GENERAL EROSION NOTES

1. ALL CONTRACTORS AND SUBCONTRACTORS INVOLVED WITH STORM WATER POLLUTION PREVENTION SHALL OBTAIN A COPY OF THE STORM WATER POLLUTION PREVENTION PLAN AND THE STATE OF MISSOURI NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM GENERAL PERMIT (NPDES PERMIT) AND BECOME FAMILIAR WITH THEIR CONTENTS.
2. CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES AS REQUIRED BY THE SWPPP. ADDITIONAL BEST MANAGEMENT PRACTICES SHALL BE IMPLEMENTED AS DICTATED BY CONDITIONS AT NO ADDITIONAL COST TO OWNER THROUGHOUT ALL PHASES OF CONSTRUCTION.
3. BEST MANAGEMENT PRACTICES (BMP'S) AND CONTROLS SHALL CONFORM TO FEDERAL, STATE, OR LOCAL REQUIREMENTS OR MANUAL OF PRACTICE, AS APPLICABLE. CONTRACTOR SHALL IMPLEMENT ADDITIONAL CONTROLS AS DIRECTED BY PERMITTING AGENCY OR OWNER.
4. SITE MAP MUST CLEARLY DELINEATE ALL STATE WATERS.
5. CONTRACTOR SHALL MINIMIZE CLEARING TO THE MAXIMUM EXTENT PRACTICAL OR AS REQUIRED BY THE GENERAL PERMIT.
6. GENERAL CONTRACTOR SHALL DENOTE ON PLAN THE TEMPORARY PARKING AND STORAGE AREA WHICH SHALL ALSO BE USED AS THE EQUIPMENT MAINTENANCE AND CLEANING AREA, AND EMPLOYEE PARKING AREA.
7. ALL WASH WATER (CONCRETE TRUCKS, VEHICLE CLEANING, EQUIPMENT CLEANING, ETC.) SHALL BE DETAINED AND PROPERLY TREATED OR DISPOSED. SUFFICIENT OIL AND GREASE ABSORBING MATERIALS AND FLOTATION BOOMS SHALL BE MAINTAINED ON SITE OR READILY AVAILABLE TO CONTAIN AND CLEAN-UP FUEL OR CHEMICAL SPILLS AND LEAKS.
9. DUST ON THE SITE SHALL BE CONTROLLED. THE USE OF MOTOR OILS AND OTHER PETROLEUM BASED OR TOXIC LIQUIDS FOR DUST SUPPRESSION OPERATIONS IS PROHIBITED.
10. RUBBISH, TRASH, GARBAGE, LITTER, OR OTHER SUCH MATERIALS SHALL BE DEPOSITED INTO SEALED CONTAINERS. MATERIALS SHALL BE PREVENTED FROM LEAVING THE PREMISES THROUGH THE ACTION OF WIND OR STORM WATER DISCHARGE INTO DRAINAGE DITCHES OR WATERS OF THE STATE.
11. THE CITY OF O'FALLON MUST BE NOTIFIED AT LEAST FORTY-EIGHT HOURS PRIOR TO THE COMMENCEMENT OF ANY GRADING OPERATIONS.
12. NO GRADED AREA IS TO REMAIN WITHOUT AT LEAST SEVENTY-FIVE (75) PERCENT OF VEGETATIVE GROUND COVER FOR MORE THAN THIRTY (30) DAYS WITHOUT BEING SEEDED AND MULCHED OR SOODED.
13. DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY HAS PERMANENTLY STOPPED SHALL BE PERMANENTLY SEEDED. THESE AREAS SHALL BE SEEDED NO LATER THAN 14 DAYS AFTER THE LAST CONSTRUCTION ACTIVITY OCCURRING IN THESE AREAS.
14. IF THE ACTION OF VEHICLES TRAVELING OVER THE GRAVEL CONSTRUCTION ENTRANCES IS NOT SUFFICIENT TO REMOVE THE MAJORITY OF DIRT OR MUD, THEN THE TIRES MUST BE WASHED BEFORE THE VEHICLES ENTER A PUBLIC ROAD. IF WASHING IS USED, PROVISIONS MUST BE MADE TO INTERCEPT THE WASH WATER AND TRAP THE SEDIMENT BEFORE IT IS CARRIED OFF THE SITE.
15. ALL MATERIALS SPILLED, DROPPED, WASHED, OR TRACKED FROM VEHICLES ONTO ROADWAYS OR INTO STORM DRAINS MUST BE REMOVED IMMEDIATELY. CONTRACTORS OR SUBCONTRACTORS WILL BE RESPONSIBLE FOR REMOVING ANY SEDIMENT THAT MAY HAVE COLLECTED IN THE STORM SEWER DRAINAGE SYSTEMS IN CONJUNCTION WITH THE STABILIZATION OF THE SITE.
17. SLOPES SHALL BE LEFT IN A ROUGHENED CONDITION DURING THE GRADING PHASE TO REDUCE RUNOFF VELOCITIES AND EROSION.
18. DUE TO THE GRADE CHANGES DURING THE DEVELOPMENT OF THE PROJECT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ADJUSTING THE EROSION CONTROL MEASURES (SILT FENCES) TO PREVENT EROSION.
19. ALL CONSTRUCTION SHALL BE STABILIZED AT THE END OF EACH WORKING DAY. THIS INCLUDES BACK FILLING OF TRENCHES FOR UTILITY CONSTRUCTION AND PLACEMENT OF GRAVEL OR BITUMINOUS PAVING FOR ROAD CONSTRUCTION.
20. THE CONTRACTOR SHALL FIELD INVESTIGATE THE ENTIRE SITE PRIOR TO HIS BID SUBMITTAL NOTING THE EXISTING VEGETATION AND TREES AND INCLUDING THE REMOVAL AND DISPOSAL IN HIS BID.
21. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF VARIOUS UTILITY COMPANIES AND, WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANY AT LEAST 48 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. RELOCATION AND CONNECTION OF THE UTILITIES SHALL BE COORDINATED WITH THE UTILITY COMPANIES.
22. UNDERGROUND STRUCTURES, FACILITIES, AND UTILITIES HAVE BEEN PLOTTED FROM AVAILABLE SURVEYS AND RECORDS. THEREFORE, THEIR LOCATIONS MUST BE CONSIDERED APPROXIMATE ONLY. THERE MAY BE OTHERS, THE EXISTENCE OF WHICH IS PRESENTLY NOT KNOWN.
23. THE CONTOURS AS SHOWN ARE FROM INFORMATION PROVIDED BY COCHRAN ENGINEERING.
24. THIS SITE FALLS WITHIN ZONE X - THIS AREA IS OUTSIDE THE 500 YEAR FLOODPLAIN. PER FIRM, FLOOD INSURANCE RATE MAP FOR ST. CHARLES COUNTY, MISSOURI AND INCORPORATED AREAS, PANEL 29183C0240G, EFFECTIVE DATE JANUARY 20, 2016.
25. THESE PLANS DO NOT CONSTITUTE A PROPERTY BOUNDARY SURVEY.
26. TEMPORARY SILTATION CONTROL STRUCTURES SHALL BE MAINTAINED UNTIL AT LEAST SEVENTY-FIVE (75) PERCENT VEGETATIVE COVER OF AREA DISTURBED IS ESTABLISHED AT A SUFFICIENT DENSITY TO PROVIDE EROSION CONTROL ON THE SITE, AS DETERMINED BY THE CITY ENGINEER.
27. WHERE NATURAL VEGETATION IS REMOVED DURING GRADING, VEGETATION SHALL BE REESTABLISHED TO AT LEAST SEVENTY-FIVE (75) PERCENT VEGETATIVE COVER OF AREA DISTURBED AS TO PREVENT EROSION. PERMANENT TYPE GRASSES SHALL BE ESTABLISHED AS SOON AS POSSIBLE OR DURING THE NEXT SEEDING PERIOD AFTER GRADING HAS BEEN COMPLETED.
28. WHEN GRADING OPERATIONS ARE COMPLETED OR SUSPENDED FOR MORE THAN THIRTY (30) DAYS, PERMANENT GRASS MUST BE ESTABLISHED TO AT LEAST SEVENTY-FIVE (75) PERCENT VEGETATIVE COVER TO PROVIDE EROSION CONTROL ON THE SITE. BETWEEN PERMANENT GRASS SEEDING PERIODS, TEMPORARY COVER SHALL BE PROVIDED ACCORDING TO THE CITY ENGINEER'S RECOMMENDATIONS. ALL FINISHED GRADES (AREAS NOT TO BE DISTURBED BY FUTURE IMPROVEMENTS) IN TWENTY (20) PERCENT SLOPES (5 HORIZONTAL TO 1 VERTICAL) SHALL BE MULCHED AND TACKED.
29. ALL EROSION AND SEDIMENT CONTROL FACILITIES SHALL BE INSPECTED FOLLOWING EACH RAINSTORM CAUSING SIGNIFICANT RUNOFF, OR BEING OF SUFFICIENT INTENSITY OR DURATION AS TO STOP CONSTRUCTION OR GRADING PROGRESS. THE SEDIMENT CONTROL FACILITIES SHALL BE CLEANED OF SEDIMENT, REPAIRED IF DAMAGED AND RESTORED TO SERVICEABLE CONDITIONS IF:
  1. EROSION SEDIMENT HAS ACCUMULATED IN SILT DEVICES
  2. SEDIMENT EROSION CONTROL DEVICES HAVE BEEN DAMAGED.
  3. OBVIOUS GULLIES OR SEDIMENT DEPOSITS HAVE BEEN FORMED ON THE DOWNSTREAM SIDE OF CONTROL DEVICES, OR
  4. SEDIMENT HAS BEEN CARRIED BEYOND THE WORKING SITE.
30. THE DEVELOPER MUST SUPPLY CITY CONSTRUCTION INSPECTORS WITH ALL COPIES OF INTERIM SOIL TESTING REPORTS.
31. ALL FILLED PLACES UNDER PROPOSED STORM AND SANITARY SEWER, PROPOSED ROADS, AND/OR PAVED OR FUTURE PAVED AREAS SHALL BE COMPACTED TO 95% OF MAXIMUM DENSITY AS DETERMINED BY THE STANDARD COMPACTION TEST T-99. ALL FILL PLACED IN PROPOSED ROADS SHALL BE COMPACTED FROM THE BOTTOM OF THE FILL UP. ALL TESTS SHALL BE VERIFIED BY A SOILS ENGINEER CONCURRENT WITH GRADING AND BACK FILLING OPERATIONS.
32. ALL FILL PLACED IN PROPOSED ROADS SHALL BE COMPACTED FROM THE BOTTOM OF THE FILL UP TO 95% OF MAXIMUM DENSITY AS DETERMINED BY THE STANDARD COMPACTION TEST AASHTO T-99. ALL TESTS SHALL BE VERIFIED BY A SOILS ENGINEER CONCURRENT WITH THE GRADING AND BACKFILLING OPERATIONS.
33. AREA SHALL BE RESEEDED WITH TEMPORARY SEEDED AT A RATE OF 5-8 LBS. OF RYE GRASS PER 1000 SQ. FT. FERTILIZER TO BE USED SHALL BE A 12-12-12 MIX AND SHALL BE APPLIED AT A RATE OF 50 LBS. PER 10,000 SQ. FT.

## EROSION CONTROL NOTES:

1. CONTRACTOR SHALL ASSURE POSITIVE DRAINAGE IN ALL AREAS.
2. NO LAND CLEARING OR GRADING SHALL BEGIN UNTIL ALL EROSION CONTROL MEASURES HAVE BEEN INSTALLED.
3. SHOULD CONSTRUCTION STOP FOR LONGER THAN 5 DAYS, THE SITE SHALL BE SEEDED AS SPECIFIED BY TEMPORARY SEEDED MIX.
4. MAINTAIN EROSION CONTROL MEASURES AFTER EACH RAIN AND AT LEAST ONCE A WEEK.
5. THIS PLAN SHALL NOT BE CONSIDERED ALL INCLUSIVE AS THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PREVENT SOIL SEDIMENT FROM LEAVING THE SITE.
6. CONTRACTOR SHALL COMPLY WITH ALL STATE AND LOCAL ORDINANCES THAT APPLY.
7. ADDITIONAL EROSION AND SEDIMENT CONTROL MEASURES WILL BE INSTALLED IF DEEMED NECESSARY BY ON SITE INSPECTION.
8. LAND DISTURBING ACTIVITIES SHALL NOT COMMENCE UNTIL APPROVAL TO DO SO HAS BEEN RECEIVED BY GOVERNING AUTHORITIES.
9. IF INSTALLATION OF STORM DRAINAGE SYSTEM SHOULD BE INTERRUPTED BY WEATHER OR NIGHTFALL, THE PIPE ENDS SHALL BE COVERED WITH FILTER FABRIC.
10. CONTRACTOR SHALL BE RESPONSIBLE TO TAKE WHATEVER MEANS NECESSARY TO ESTABLISH PERMANENT SOIL STABILIZATION.
11. CONTRACTOR SHALL ADJUST AND/OR CUT EXISTING PAVEMENT AS NECESSARY TO ACQUIRE A SMOOTH FIT AND CONTINUOUS GRADE.
12. ALL CUT OR FILL SLOPES SHALL BE 3:1 OR FLATTER UNLESS OTHERWISE NOTED.
13. ALL STORM PIPE ENTERING STRUCTURES SHALL BE GROUTED TO ASSURE CONNECTION AT STRUCTURE IS WATERIGHT.
14. EFFORTS WILL BE MADE TO DIRECT DRAINAGE TO EXISTING DISCHARGE POINTS.
15. ALL STORM WATER RUNOFF SHALL MEET THE CITY OF O'FALLON STANDARDS.
16. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO KEEP ALL MUD AND SILT ON SITE AND OFF OF STREETS.
17. THE CONTRACTOR IS RESPONSIBLE FOR KEEPING STORM WATER RUN-OFF AND SILTATION UNDER CONTROL DURING CONSTRUCTION.
18. CONTRACTOR SHALL MAINTAIN THE SITE IN A WELL-DRAINED MANNER IN ORDER TO ASSUME THE SHORTEST POSSIBLE DRYING TIME AFTER EACH RAINFALL. THIS WILL MEAN THAT PUMPING OF STANDING WATER IN LOW AREAS ON THE SITE WILL MOST LIKELY BE REQUIRED DURING CONSTRUCTION.
19. EQUIPMENT AND VEHICLES SHALL BE CLEANED BEFORE ENTERING PUBLIC ROADWAYS SO THAT NO SILT, MUD, OR DEBRIS SHALL BE TRACKED ONTO THE STREET. A TRACTOR WITH A BLADE, A BROOM TRACTOR, AND A STREET SWEEPER OR A HIGH PRESSURE WASH TRUCK SHALL BE AVAILABLE FOR THE SITE AT ALL TIMES FOR THE REMOVAL OF MUD FROM THE STREETS.

## STORMWATER POLLUTION PREVENTION NOTES

1. DUST ON THE SITE SHALL BE CONTROLLED. THE USE OF MOTOR OILS AND OTHER PETROLEUM BASED OR TOXIC LIQUIDS FOR DUST SUPPRESSION OPERATIONS IS PROHIBITED.
2. RUBBISH, TRASH, GARBAGE, LITTER OR OTHER SUCH MATERIALS SHALL BE DEPOSITED INTO SEALED CONTAINERS. MATERIALS SHALL BE PREVENTED FROM LEAVING THE PREMISES THROUGH THE ACTION OF WIND OR STORMWATER DISCHARGE INTO DRAINAGE DITCHES OR WATERS OF THE STATE.
3. ALL STORM WATER POLLUTION PREVENTION MEASURES PRESENTED ON THIS PLAN, AND IN THE STORM WATER POLLUTION PREVENTION PLAN, SHALL BE INITIATED AS SOON AS PRACTICABLE.
4. DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY HAS STOPPED FOR AT LEAST 21 DAYS, SHALL BE TEMPORARILY SEEDED. THESE AREAS SHALL BE SEEDED NO LATER THAN 14 DAYS FROM THE LAST CONSTRUCTION ACTIVITY OCCURRING IN THESE AREAS.
5. DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY HAS PERMANENTLY STOPPED SHALL BE PERMANENTLY SEEDED. THESE AREAS SHALL BE SEEDED NO LATER THAN 14 DAYS AFTER THE LAST CONSTRUCTION ACTIVITY OCCURRING IN THESE AREAS. REFER TO THE GRADING PLAN.
6. IF THE ACTION OF VEHICLES TRAVELING OVER THE GRAVEL CONSTRUCTION ENTRANCES IS NOT SUFFICIENT TO REMOVE THE MAJORITY OF DIRT OR MUD, THEN THE TIRES MUST BE WASHED BEFORE THE VEHICLES ENTER A PUBLIC ROAD. IF WASHING IS USED, PROVISIONS ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION MUST BE MADE TO INTERCEPT THE WASH WATER AND TRAP THE SEDIMENT BEFORE IT IS CARRIED OFF THE SITE.
7. ALL MATERIALS SPILLED, DROPPED, WASHED OR TRACKED FROM VEHICLES ONTO ROADWAYS OR INTO STORM DRAINS MUST BE REMOVED IMMEDIATELY.
8. CONTRACTORS OR SUBCONTRACTORS WILL BE RESPONSIBLE FOR REMOVING SEDIMENT THAT MAY HAVE COLLECTED IN ANY STORM SEWER DRAINAGE SYSTEMS IN CONJUNCTION WITH THE STABILIZATION OF THE SITE.
9. ON-SITE & OFF-SITE STOCKPILE AND BORROW AREAS SHALL BE PROTECTED FROM EROSION AND SEDIMENTATION THROUGH IMPLEMENTATION OF BEST MANAGEMENT PRACTICES. STOCKPILE AND BORROW AREA LOCATIONS SHALL BE NOTED ON THE SITE MAP AND PERMITTED IN ACCORDANCE WITH GENERAL PERMIT REQUIREMENTS.
10. SLOPES SHALL BE LEFT IN A ROUGHENED CONDITION DURING THE GRADING PHASE TO REDUCE RUNOFF VELOCITIES AND EROSION.
11. DUE TO THE GRADE CHANGES DURING THE DEVELOPMENT OF THE PROJECT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ADJUSTING THE EROSION CONTROL MEASURES (SILT FENCE AND SEDIMENT BASINS) TO PREVENT EROSION.
12. ALL CONSTRUCTION SHALL BE STABILIZED AT THE END OF EACH WORKING DAY. THIS INCLUDES BACKFILLING OF TRENCHES FOR UTILITY CONSTRUCTION AND PLACEMENT OF GRAVEL OR BITUMINOUS PAVING FOR ROAD.
13. THE STORMWATER POLLUTION PREVENTION PLAN IS COMPRISED OF THIS DRAWING AND THE STANDARD DETAILS.
14. ALL CONTRACTORS AND SUBCONTRACTORS INVOLVED WITH STORM WATER POLLUTION PREVENTIONS SHALL OBTAIN A COPY OF THE STORM WATER POLLUTION PREVENTION PLAN AND THE STATE OF MISSOURI NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM GENERAL PERMIT (NPDES PERMIT) AND BECOME FAMILIAR WITH THEIR CONTENT.
15. CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES AS REQUIRED BY THE SWPPP. ADDITIONAL BEST MANAGEMENT PRACTICES SHALL BE IMPLEMENTED AS DICTATED BY CONDITIONS AT NO ADDITIONAL COST TO OWNER THROUGHOUT ALL PHASES OF CONSTRUCTION.
16. BEST MANAGEMENT PRACTICES (BMP'S) AND CONTROLS SHALL CONFORM TO FEDERAL, STATE, OR LOCAL REQUIREMENTS OR MANUAL OF PRACTICE, AS APPLICABLE. CONTRACTOR SHALL IMPLEMENT ADDITIONAL CONTROLS AS DIRECTED BY PERMITTING AGENCY OR OWNER.
17. SITE MAP MUST CLEARLY DELINEATE ALL STATE WATERS, PERMITS FOR ANY CONSTRUCTION ACTIVITY IMPACTING STATE WATERS OR REGULATED WETLANDS MUST BE MAINTAINED ON SITE AT ALL TIMES.
18. CONTRACTOR SHALL MINIMIZE CLEARING TO THE MAXIMUM EXTENT PRACTICAL OR AS REQUIRED BY THE GENERAL PERMIT.
19. GENERAL CONTRACTOR SHALL DENOTE ON PLAN THE TEMPORARY PARKING AND STORAGE AREA WHICH SHALL ALSO BE USED AS THE EQUIPMENT MAINTENANCE AND CLEANING AREA, EMPLOYEE PARKING AREA, AND AREA FOR LOCATING PORTABLE FACILITIES, OFFICE TRAILERS, AND TOILET FACILITIES.
20. ALL WASH WATER (CONCRETE TRUCKS, VEHICLE CLEANING, EQUIPMENT CLEANING, ETC.) SHALL BE DETAINED AND PROPERLY TREATED OR DISPOSED.
21. SUFFICIENT OIL AND GREASE ABSORBING MATERIALS AND FLOTATION BOOMS SHALL BE MAINTAINED ON SITE OR READILY AVAILABLE TO CONTAIN AND CLEAN-UP FUEL OR CHEMICAL SPILLS AND LEAKS.

SOIL PREPARATION AND COMPACTION:  
REMOVE ALL STUMPS, BUSHES, TREES, WEEDS, ROOTS AND OTHER SURFACE OBSTRUCTIONS FROM THE SITE. CONTRACTOR TO STRIP ALL TOPSOIL FROM THE ENTIRE AREA TO BE GRADED. AFTER THE REMOVAL OF ALL FOREIGN ORGANIC MATTER, AND AFTER STRIPPING OF TOPSOIL, THE ENTIRE SURFACE TO BE FILLED, OR AREAS THAT ARE CUT TO SUBGRADE SHALL BE SCARIFIED TO A MINIMUM DEPTH OF 12 INCHES AND THEN COMPACTED BY PROOF ROLLING WITH SUITABLE COMPACTION EQUIPMENT WEIGHING NOT LESS THAN 400 PLS BASED ON THE CONTACT AREA OF ONE ROW OF FEET, OR PNEUMATIC-TIRED ROLLER OF EQUIVALENT COMPACTION CHARACTERISTICS.

THE MAXIMUM THICKNESS OF FILL SHALL BE IN LIFTS NOT TO EXCEED 8 INCHES. THE PROOF ROLLING AND THE FILL COMPACTION OPERATIONS UNDER THE BUILDING AND PAVED AREAS SHALL PRODUCE AT LEAST 95% OF THE STANDARD PROCTOR MAXIMUM DRY DENSITY TEST (ASTM D-698). ANY SOFT AREAS ENCOUNTERED DURING PROOF ROLLING SHALL BE UNDERCUT AND REPLACED WITH A PROPERLY COMPACTED FILL. THE COMPACTION OF THE FILL SHALL BE TESTED DURING PLACEMENT BY A QUALIFIED SOILS TECHNICIAN TO DETERMINE IF THE PROPER DENSIFICATION IS TAKING PLACE. ALL FILL USED SHALL BE OF LOW PLASTICITY SOILS AS APPROVED BY THE SOILS ENGINEER. AFTER PROOF ROLLING, NO WATER SHOULD BE ALLOWED TO POND ON THE SURFACE. THE EARTHWORK FOR ALL BUILDING FOUNDATIONS AND SLABS SHALL BE IN ACCORDANCE WITH ARCHITECTURAL BUILDING PLANS AND SPECIFICATIONS. COMPACTION EQUIPMENT SHALL BE OPERATING OF THE SITE AT ALL TIMES DURING FILLING OPERATIONS.

MAINTENANCE:  
ALL MEASURES STATED ON THIS EROSION AND SEDIMENT CONTROL PLAN, AND IN THE STORM WATER POLLUTION PREVENTION PLAN, SHALL BE MAINTAINED IN FULLY FUNCTIONAL CONDITION UNTIL NO LONGER REQUIRED FOR A COMPLETE PHASE OF WORK OR FINAL STABILIZATION OF THE SITE. ALL EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE CHECKED BY A QUALIFIED PERSON AT LEAST ONCE EVERY SEVEN CALENDAR DAYS AND WITHIN 24 HOURS OF THE END OF A 0.5" RAINFALL EVENT, AND CLEANED AND REPAIRED IN ACCORDANCE WITH THE FOLLOWING:

1. INLET PROTECTION DEVICES AND BARRIERS SHALL BE REPAIRED OR REPLACED IF THEY SHOW SIGNS OF UNDERMINING OR DETERIORATION.
2. ALL SEEDED AREAS SHALL BE CHECKED REGULARLY TO SEE THAT A GOOD STAND IS MAINTAINED. AREAS SHOULD BE FERTILIZED, WATERED, AND RESEEDED AS NEEDED.
3. SILT FENCES SHALL BE REPAIRED TO THEIR ORIGINAL CONDITIONS IF DAMAGED. SEDIMENT SHALL BE REMOVED FROM THE SILT FENCES WHEN IT REACHES ONE-HALF THE HEIGHT OF THE SILT FENCE.
4. THE CONSTRUCTION ENTRANCES SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOW OF MUD ONTO PUBLIC RIGHT-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING OF THE CONSTRUCTION ENTRANCES AS CONDITIONS DEMAND.
5. ALL CURB AND AREA INLETS SHALL HAVE INLET PROTECTION SUFFICIENT TO PREVENT TRANSPORTED SOIL FROM BEING DEPOSITED IN THE FORM OF SILT IN THE STORM DRAINAGE SYSTEMS ON-SITE OR OFF-SITE.
6. ALL FINISHED GRADES THAT EXCEED 20% (5 HORIZONTAL TO 1 VERTICAL) SHALL BE MULCHED AND TACKED AS REQUIRED TO PREVENT EROSION OF THE SLOPES.

## SEQUENCE OF CONSTRUCTION

1. INSTALL SILT FENCES.
2. PERFORM GRADING OPERATIONS.
3. CONSTRUCT SITE IMPROVEMENTS.
4. INSTALL TEMPORARY SEEDED & MULCHING ON ENTIRE SITE.
5. REMOVE ALL TEMPORARY EROSION AND SEDIMENT CONTROL DEVICES (ONLY IF SITE IS STABILIZED).

SOIL EROSION/SEDIMENTATION CONTROL OPERATION TIME SCHEDULE												
NOTE: GENERAL CONTRACTOR TO COMPLETE TABLE WITH THEIR SPECIFIC PROJECT SCHEDULE												
CONSTRUCTION SEQUENCE	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
TEMPORARY CONTROL MEASURES												
ROUGH GRADING												
CONSTRUCT IMPROVEMENTS												
FINISH GRADING												
TEMPORARY SEEDED & SITE STABILIZATION												

- 1) CONTRACTOR SHALL UPDATE THE TABLE BY SHADING OR DATING THE APPLICABLE ACTIVITIES AS PROJECT PROGRESSES.
- 2) TIME SCHEDULE MUST COINCIDE WITH SEQUENCE OF CONSTRUCTION.

TOTAL SITE ACREAGE  
+/- 2.67 ACRES

AREA OF DISTURBANCE  
+/- 2.67 ACRES

NOTE:  
ENTIRE SITE TO BE SEEDED AND MULCHED FOR TEMPORARY STABILIZATION. WORK SHALL NOT BE DEEMED COMPLETE UNTIL SITE IS COVERED WITH A STAND OF GRASS.


NOTE:  
INSPECTION REPORTS ARE TO BE PROVIDED TO THE CITY OF O'FALLON MONTHLY AND AT THE TIME OF COMPLETION. THE CITY WILL ONLY RELEASE THE DEPOSIT FUNDS UPON RECEIPT OF ALL INSPECTION REPORTS.

NOTE:  
THE NOTES ON THIS PAGE ARE PROJECT SPECIFIC. IF THERE IS A CONFLICT BETWEEN THESE NOTES AND THE CITY OF O'FALLON STANDARD NOTES THEN THE CITY STANDARD NOTES SHALL GOVERN.

636-332-4574 (Tel.)  
636-357-0760 (Fax)  
win@cochran-engineering.com  
Civil Engineering  
Land Surveying  
Architecture  
Site Development  
Construction  
Master Planning

**COCHRAN**

North Office  
8 East Main Street  
Winnetka, Missouri 65385

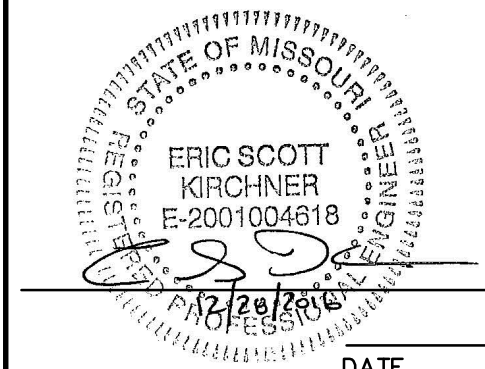

DATE  
Eric S. Kirchner No. E-2001004618  
Registered Professional Engineer  
State of Missouri  
for Cochran Engineering & Surveying

Developer / Owner Information:  
C Bennett Premium Building Supplies  
1285 W. Terra Lane  
O'Fallon, MO 63366

City of O'Fallon Standard Sheet

P+Z No.  
Approval Date: 9/1/16

City No.

Page No.

C7