

TYPE	DESCRIPTION	MANUFACTURER AND CATALOG NUMBER	MOUNTING	LAMP DATA				VOLT	NOTES
				QUAN.	WATT	TYPE	ORDERING CODE		
AA	2' X 4' LAY-IN TROFFER W/LENS	DAYBRITE #2DFG332RA12-PAF-1/3EB	R	3	32	F	F032/830	120	1
AA/EM	2' X 4' LAY-IN TROFFER W/LENS BATTERY INVERTER	DAYBRITE #2DFG332RA12-PAF-1/3EB	R	3	32	F	F032/830	120	1,2
BA	2' X 2' LAY-IN DIRECT/INDIRECT	DAYBRITE #2AVG2CF40 PMW 1/2EB	R	2	40	F	FT40W/830	120	1
BA/EM	2' X 2' LAY-IN DIRECT/INDIRECT BATTERY INVERTER	DAYBRITE #2AVG2CF40 PMW 1/2EB	R	2	40	F	FT40W/830	120	1,2
CA	CONTINUOUS CONCEALED LITE COVE - INDIRECT	LITE CONTROL #CCA130 AMA5	W	1	25/32	F	F032/830	120	3,4,6
CB	CONTINUOUS RECESSED LITE COVE - DIRECT	LITE CONTROL #20118CVW-ELB	R	1	25/32	F	F032/830	120	3,4
CC	NAVE INDIRECT 10' X 5'	SPI #ECM1743	POCKET	1	350	I	T3RSC/HR	120	6
DA	6" DIA. CLEAR ALZAK DOWNLIGHT	OMEGA #OM82H2QPPLCS	R	2	26	F	CF26DD/830	120	1
DA/EM	6" DIA. ALZAK CLEAR DOWNLIGHT BATTERY INVERTER	OMEGA #OM82H2QPPLCS/EM	R	2	26	F	CF26DD/830	120	1,2
DB	6" DIA. ALZAK CLEAR DOWNLIGHT	OMEGA #OM8HCS	R	1	150	I	A21/IF	120	1
DC	4" DIA. CLEAR ALZAK WALL ACCENT	OMEGA #OM4MCS	R	1	50	I	PAR2ONFL	120	1
DD	4" DIA. ALZAK WALL WASHER	OMEGA #OM4WACS	I	1	100	I	A19/IF	120	
DE	5" DECORATIVE TRIM DOWNLIGHT	SYSTEMALUX #2010CN A51TRD FROSTED	R	1	50	I	PAR2ONFL	120	
EA	EMERGENCY WHITE RECESSED SQUARE LENSED	COOPER #R4C-145-FRK-1	R	1	12	I	BI PIN T2 1/4	12	7
EB	EMERGENCY 200W-12V BATTERY UNIT	MCPHILBEN #NE12L200V-VM-SD	S	-	-	-	N/A	120	5,9
EC	EMERGENCY WALL STEP LIGHT	MCPHILBEN #N12R131	WR	1	13	I	FURNISHED	120	9
ED	EMERGENCY ADJUSTABLE SPOT WHITE	COOPER #GR-27-16 MCPHILBEN #MR	R	1	12	I	PAR 36 HALOGEN	12	9
FA	INDUSTRIAL 4" PENDANT	DAYBRITE #2F232 PP 1/2EB	P	2	32	F	F032/830	120	1
FA/EM	INDUSTRIAL 4" PENDANT WALL MOUNT W/GUARD	DAYBRITE #2F232PP 1/2EB	P	2	32	F	F032/830	120	1,2
FB	INDUSTRIAL WALL MOUNT W/GUARD	CANLET #9FWR261-H-G	W	1	26	F	CF26D7/830	120	
GA	GROUND MOUNTED SPOT	STERNER #VE120NSP120-YKSM DARK BRONZE	S	1	120	I	PARQ38NSP	120	
GB	GROUND MOUNT FLOOD	STERNER #NFRANOR 531-3L-RN-15002 DARK BRONZE	S	1	500	I	T3/Q/CL	120	10
GC	GROUND MOUNT SPOT STAINLESS WATER TIGHT FLUSH IN CONCRETE	WE-EF-CTA-1Q	R	1	150	I	QT18	120	
NA	6" ALZAK PARABOLIC DOWNLIGHT	OMEGA #OM8250T4QTLTRWD-CS	R	1	250	I	T4/Q/CL	120	8
NB	ADJUSTABLE SPOT WHITE	RAMBUSCH #BLSA 300/500 PAR95 EY WHITE	S	1	500	I	PARQ50MSP	120	
NC	ADJUSTABLE SPOT	RAMBUSCH #BLSA 300/500 PAR95 EY WHITE	S	1	500	I	PARQ50MFL	120	

TYPE	DESCRIPTION	MANUFACTURER AND CATALOG NUMBER	MOUNTING	LAMP DATA				VOLT	NOTES
				QUAN.	WATT	TYPE	ORDERING CODE		
ND	6" ALZAK PARABOLIC DOWNLIGHT SLOPE CEILING	OMEGA #OM6500T4QTZRMD-CSSLA	R	1	500	I	T4/Q/CL	120	8
NE	6" ALZAK PARABOLIC DOWNLIGHT	OMEGA #OM6500T4QTZTRNDCCS	R	1	500	I	T4/Q/CL	120	8
NF	ADJ DOWNLIGHT WALL WASH	OMEGA #OM6250PAR38RADJ45CS	R	1	250	I	PARQ 38FL	120	8
NG	ADJUSTABLE CORNER MOUNT ALL WHITE FLOOD WITH LOUVER	MANNING #GCQ-264-WHITE-A	S	2	500	I	QPAR56MFL	120	
NH	3-LAMP ADJUSTABLE RECESSED SPOT ALL WHITE HOUSING	RSA #CO383015-W-CC-DC CENTER	R	1	12	I	PAR38/HRFL PAR 36	120/12	13
NJ	6" ALZAK PARABOLIC DOWNLIGHT SLOPE CEILING	OMEGA #OMG150T4QTZMDSSA6	R	1	150	I	T4/Q/CL	120	8
PA	2' X 4' PARABOLIC LAY-IN TROFFER	DAYBRITE #2P3GS43248SL	R	4	32	F	T8/830	120	1
PA/EM	2' X 4' PARABOLIC LAY-IN TROFFER INVERTER BALLAST	DAYBRITE #2P3GS43248SL/EM	R	4	32	F	T8/830	120	1,2
SA	PARISH HALL ENTRY SCOFF	ADVENT #AE7051-UP-PT	W	2	39	F	CF39	120	14
SB	WALK WAY FIXTURE BRONZE	MCPHILBEN #B43C28QFLV/BRP	R	1	28	F	CF28DD	120	14
SC	BUILDING MOUNT SECURITY AREA BRONZE	MCPHILBEN #101MT BRP	W	2	28	F	CF26DD/830	120	
SC/EM	BUILDING MOUNT SECURITY AREA BRONZE	MCPHILBEN #101EMMT BRP	W	2	28	F	CF26DD/830	120	11
SD	RECESSED BLACK BAFFLE AND WHITE TRIM DOWNLIGHT	OMEGA #OM6250PAR38BB	R	1	150	I	PARQ 38WFL	120	11
SE	RECESSED DOWN LIGHT WHITE SPREAD LENS	OMEGA #OM82H26QLSP/L	R	2	26	F	CF26DD/830	120	11
SE/EM	RECESSED DOWN LIGHT WHITE SPREAD LENS INVERTER	OMEGA #OM82H26QLSP/L/EM	R	2	26	F	CF26DD/830	120	11,12
SF	BOLLARD	GUARDCO #BRM82242-100MH-27-BRP	S	1	100	MH		277	
SG	STEEPLE COLUMN ACCENT WHITE	STERNER #CA5D75QTZRW120-YKBPWH	S	1	75	I	T4/Q/CL	120	6,14
SH	STEEPLE ROOF FLOOD WHITE	STERNER #CA5D150QTZRW120-YKBPWH	S	1	150	I	T4/Q/CL	120	6,14
SJ	STEEPLE ROOF MOUNT SPOT WHITE	STERNER #VE120NSP120-YKBPWH	S	1	120	I	PARQ38NSP	120	6,14
SP1	30' POLE AND TWO LUMINAIRE	GUARDCO #G18 2 4XL 400MH - BRP		2	400	MH		480	17
SP2	30' POLE AND TWO LUMINAIRE W/HOUSE SHIELD	GUARDCO #G18 2 4XL 400MH - BRP-HS		2	400	MH		480	17
SP4	30' POLE AND THREE LUMINARIES	GUARDCO #G18 304XL-400MH-BRP		3	400	MH		400	17
SP5	30' POLE AND THREE LUMINARIES	GUARDCO #G18 304XL-400MH-BRP-HS		3	400	MH		480	17
TA	8' TRACK 2 CIRCUIT	CAPRI #WHITE W/CP210 CONNECTOR	S	-	-	-	-	120	1
TB	4" TRACK SINGLE CIRCUIT	CAPRI #WHITE W/CP210 CONNECTOR	S	-	-	-	-	120	1
TF	4" TRACK FLOOD WHITE	CAPRI #CTX8435W	S	1	75	I	PAR30CAPFL	120	1
TS	TRACK SPOT WHITE	CAPRI #CTX8435W	S	1	75	I	PAR30CAPSP	120	1


NOTES:

- EQUAL BY COOPER, DAYBRITE, LITHONIA.
- PROVIDE BODINE B50 OR 894C EMERGENCY BALLAST TO OPERATE TWO LAMPS FOR LIFE SAFETY. CONNECT FIXTURE AS SWITCHED UNLESS INDICATED FOR "NL" (NIGHT LIGHT) FUNCTION. PROVIDE PILOT AND PUSH TO TEST BUTTON INTEGRAL TO FIXTURE OR SEPARATELY MOUNTED ADJACENT TO DOWNLIGHT.
- EQUAL BY NEORAY. PROVIDE AMA5 OPTION FOR 5' TILT.
- PROVIDE CUSTOM SHOP DRAWINGS INDICATING FIXTURE TYPE AND QUANTITY FOR EACH COVE INCLUDING AND PIECES AND EXTENSIONS FOR COMPLETE ASSEMBLY. FIXTURE ASSEMBLY SHALL CONSIST OF 3" X 4" SINGLE LAMP RUNS WITH MULTI LAMP BALLAST AS REQUIRED.
- PROVIDE WHITE SHELF AND SECURE TO WALL AND UNIT FOR SEISMIC RESTRAINT. APPROVED EQUAL BY CHLORIDE OR DUAL LIGHT. CONNECT TO DIMMER NON-CONTROLLED CIRCUIT CONSTANT ON.
- COORDINATE CONSTRUCTION OF COVE AND MOUNTING OF FIXTURE TO CONCEAL LIGHT AND FIXTURE SOURCE FROM VIEWING ANGLES, INCLUDING BALCONY.
- PERFORMANCE CRITERIA AND PHOTO METRIC REQUIRED FOR EQUAL PRODUCTS.
- EQUAL BY RAMBUSCH OR INDY.
- EQUAL BY DUAL LIGHT OR CHLORIDE.
- PROVIDE FOOT CANDLE CALCULATIONS WITH SHOP DRAWING SUBMITTAL. PROVIDE CAST BOX AND MOUNTING HARDWARE FOR GROUND MOUNT YOKE ASSEMBLY.
- PROVIDE DAMP LABEL AND O' BALLAST WHERE APPROPRIATE.
- PROVIDE O' BALLAST AND REMOTE BATTERY UNIT.
- TWO OUTSIDE SPOTS SHALL BE PAR38 AT 120V AND THE CENTER SPOT SHALL BE LIFE SAFETY 12VDC 12 WATT PAR 36. EQUAL BY INDY.
- FINISH TO BE SELECTED BY ARCHITECT.
- MOUNTING HEIGHT SHALL COMPLY WITH ADA.
- COORDINATE MOUNTING HEIGHT WITH ARCHITECT.
- ARCHITECT TO SELECT FINISH. SEE PLANS FOR HOUSE SHIELD REQUIREMENTS. POLE SHALL BE GUARDCO SSS30-4-11.
- COLOR AS NOTED.
- PROVIDE REMOTE BATTERY INVERTER BATTAST.

TYPE	DESCRIPTION	MANUFACTURER AND CATALOG NUMBER	MOUNTING	LAMP DATA				VOLT	NOTES
				QUAN.	WATT	TYPE	ORDERING CODE		
WA	PRE FUNCTION SCOFF	ADVENT #AS3046-PT 2140T	W	2	40	I	T10	120	14
WB	STAIR SCOFF	ADVENT #AS3056-PT	W	2	26	F	CF26DD/830	120	14,15
WBEM	INVERTER BALLAST	ADVENT #AS3056-PT	W	2	26	F	CF26DD/830	120	14,15,19
WC	4' STAIR UP/DN LIGHT FLUORESCENT	ALKCO #9518-4	W	2	32	F	F032/830	120	MH 84" 15
WC/EM	4' STAIR UP/DN LIGHT FLUORESCENT INVERTER BALLAST	ALKCO #9518-4-EM	W	2	32	F	F032/830	120	2, MH 84" 15
WD	OVER MIRROR 24" FIXTURE	ALKCO #BN3226	W	2	17	F	F017/830	120	16
XA	WHITE EXT	MCPHILBEN #CXLRWEM	C/W	-	-	LED	FURNISHED	120	9
XB	EXIT BRONZE STENCIL FACE	EMERG-LITE #LEDPX1R1N	W	-	-	LED	FURNISHED	120	14,18
XC	EXIT AND EMERGENCY FIXTURE COMBO	MCPHILBEN #CXLRW	C/W	2	5	MR16	FURNISHED	120	9
XW	EXIT WHITE STENCIL FACE	EMERG-LITE #LEDPX1R1N	C/W	-	-	LED	FURNISHED	120	9,14,18


1 MOUNTING
R - RECESSED
S - SURFACE
E - EXTERIOR
W - WALL
P - PENDANT

2 LAMP TYPE
F - FLUORESCENT
CF - COMPACT FLUORESCENT
I - INCANDESCENT
MH - METAL HALIDE
HPS - HIGH PRESSURE SODIUM
FWF - FURNISHED WITH FIXTURE

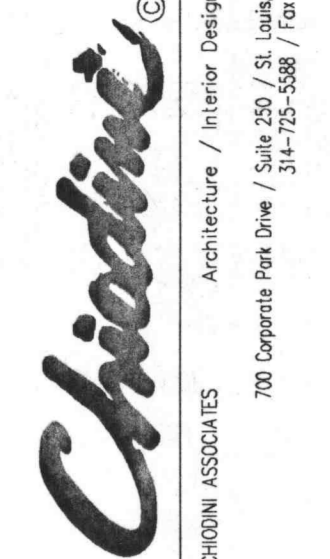


THE ARCHITECT EXPRESSLY RESERVES HIS COMMON LAW AND STATUTORY LAW RIGHTS FOR THESE "ARCHITECTURAL WORKS AND TECHNICAL DOCUMENTS" AND ANY DERIVATIVES THEREOF. THESE DRAWINGS AND DOCUMENTS ARE NOT TO BE REPRODUCED, COPIED, OR REPRODUCED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF CHADWICK ASSOCIATES, INC. ANY PARTY WHOSE WORK IS REPRODUCED WITHOUT FIRST OBTAINING SAID WRITTEN PERMISSION AND CONSENT.

HEIDEMAN ASSOCIATES, INC.
A Zak Company
13545 Barrett Parkway Drive
Suite 200
St. Louis, Missouri 63021
p 314.822.2217
f 314.822.7858
www.zakcompanies.com

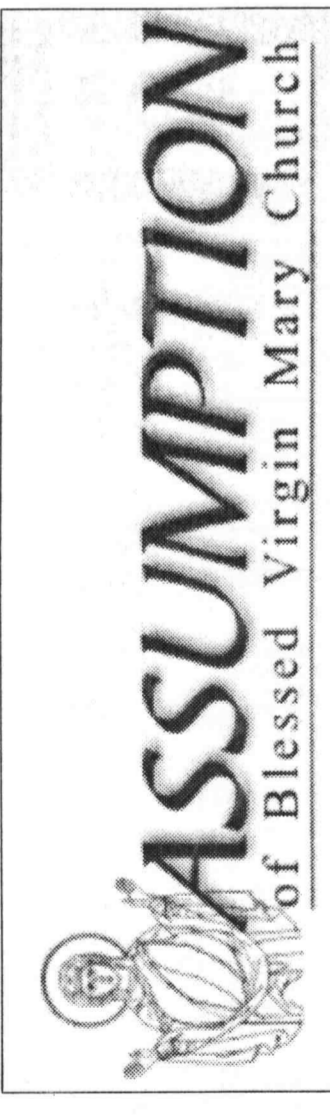

REVISIONS:
6/17/03 - REVISE FOR 0.5F.C.

02272 E61

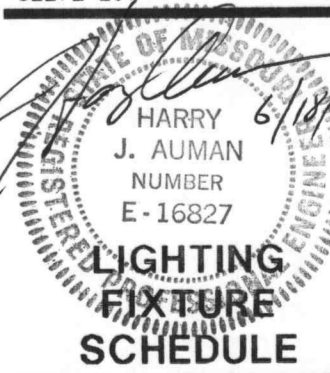

PROJECT: 2001.042
DATE: 11 MARCH 2003
DRAWN: B.S.

E6.1

DISCLAIMER OF RESPONSIBILITY
I hereby specify, that this document is authenticated by my seal.
I hereby disclaim any responsibility for all other plans, specifications, estimates, reports, or other documents, or instruments relating to or intended to be used for any part or parts of the architectural or engineering project or survey.

Heideman & Associates, Inc.
Harry Auman
Missouri Engineer
License E-16827

PER BOCA NATIONAL BUILDING CODE - 1999:
ALL NEW WORK TO BE CONSTRUCTED HEREIN SHALL COMPLY WITH ALL EARTHQUAKE RESTRAINT REQUIREMENTS OF SEISMIC HAZARD EXPOSURE GROUP II

REVISED PERMIT SET - 30 APRIL 2003