

NOTES:
1. DETAIL IS INTENDED FOR SIDEWALK WIDTHS OF 4 TO 6 FEET. CONTRACTOR SHALL COORDINATE WITH ARCHITECT OR ENGINEER FOR ANY SIDEWALK WIDTHS THAT EXCEED 6 FEET.

1 CONCRETE SIDEWALK DETAIL

SCALE: N.T.S.

REF. DWG. C4.0

NOTE:
1. MINIMUM PAVEMENT DETAILS SHOWN FOR REFERENCE ONLY. CONTRACTOR TO VERIFY FINAL PAVEMENT REQUIREMENTS WITH GEOTECH REPORT AND/OR OWNER.
2. THE ASPHALT SURFACE SHALL BE COMPAKTED TO 98% MAXIMUM DENSITY.

2 ASPHALT PAVEMENT (DRIVE AREAS)

SCALE: N.T.S.

REF. DWG. C2.0

NOTE:
1. MINIMUM PAVEMENT DETAILS SHOWN FOR REFERENCE ONLY. CONTRACTOR TO INSTALL CONCRETE PAVEMENT JOINTS PER THE AMERICAN CONCRETE INSTITUTES "GUIDE FOR DESIGN AND CONSTRUCTION OF CONCRETE PARKING LOTS". THE JOINT SPACING SHALL BE NO GREATER THAN 15 FEET PER THE GEOTECH REPORT DATED 05/09/2025 BY HOLLAND ENGINEERS.
2. THE ASPHALT SURFACE SHALL BE COMPAKTED TO 98% MAXIMUM DENSITY.

3 ASPHALT PAVEMENT (PARKING AREAS)

SCALE: N.T.S.

REF. DWG. C2.0


NOTES:
1. MINIMUM PAVEMENT DETAILS SHOWN FOR REFERENCE ONLY. CONTRACTOR TO VERIFY FINAL PAVEMENT REQUIREMENTS WITH GEOTECH REPORT AND/OR OWNER.
2. CONTRACTOR TO INSTALL CONCRETE PAVEMENT JOINTS PER THE AMERICAN CONCRETE INSTITUTES "GUIDE FOR DESIGN AND CONSTRUCTION OF CONCRETE PARKING LOTS". THE JOINT SPACING SHALL BE NO GREATER THAN 15 FEET PER THE GEOTECH REPORT DATED 05/09/2025 BY HOLLAND ENGINEERS.
3. ALL NON-REINFORCED CONCRETE SHALL BE 4,000 PSI AT 28 DAYS.

4 CONCRETE PAVEMENT (HEAVY DUTY)

SCALE: N.T.S.

REF. DWG. C2.0

THE PROFESSIONAL WHOSE SIGNATURE OR PERSONAL SEAL APPEARS ON THIS PAGE, AND PERSONS ASSOCIATED WITH HIM, ASSUME RESPONSIBILITY ONLY FOR WHAT APPEARS ON THIS PAGE, AND DISCLAIM ANY LIABILITY FOR ANY INFORMATION CONTAINED HEREIN WHICH IS NOT SPECIFIED IN THE CONTRACTS, DRAWINGS, OR SPECIFICATIONS FOR THIS PROJECT. THE PROFESSIONAL SIGNING THIS PAGE CERTIFIES THAT HE HAS READ AND UNDERSTOOD THE PROFESSIONAL RELATING TO THIS PROJECT, AND AGREES TO BE BOUND BY IT. THIS PAGE IS NOT A PART OF THE CONTRACT.

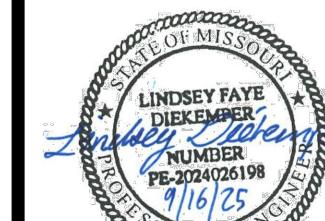

LINDSEY FAYE DICEMPER
CIV. ENGR.
PE-2024028198
CORPORATE
ENGINEERING
CERTIFICATE #001165

CALEDONIA LOT 3A
231 RUSH WAY
OFallon, MO 63368
DETAIL SHEET

+ ST. CHARLES
1520 Fifth Street
St. Charles, MO 63303
636.978.5008 (tel)
www.colearchitecture.com


COLE
CIVIL ENGINEERING SURVEYING / PLANNING / LANDSCAPE ARCHITECTURE
Cole & Associates, Inc. is a division of Cole Building Group, Inc. An Arkansas & Texas based company.

DESIGN/CALC BY
DRAWN BY
CHECKED BY
LFD
DRAWING SCALE
AS SHOWN
DATE
09/16/2025

Job Number
24-0089

Sheet Number

C8.0

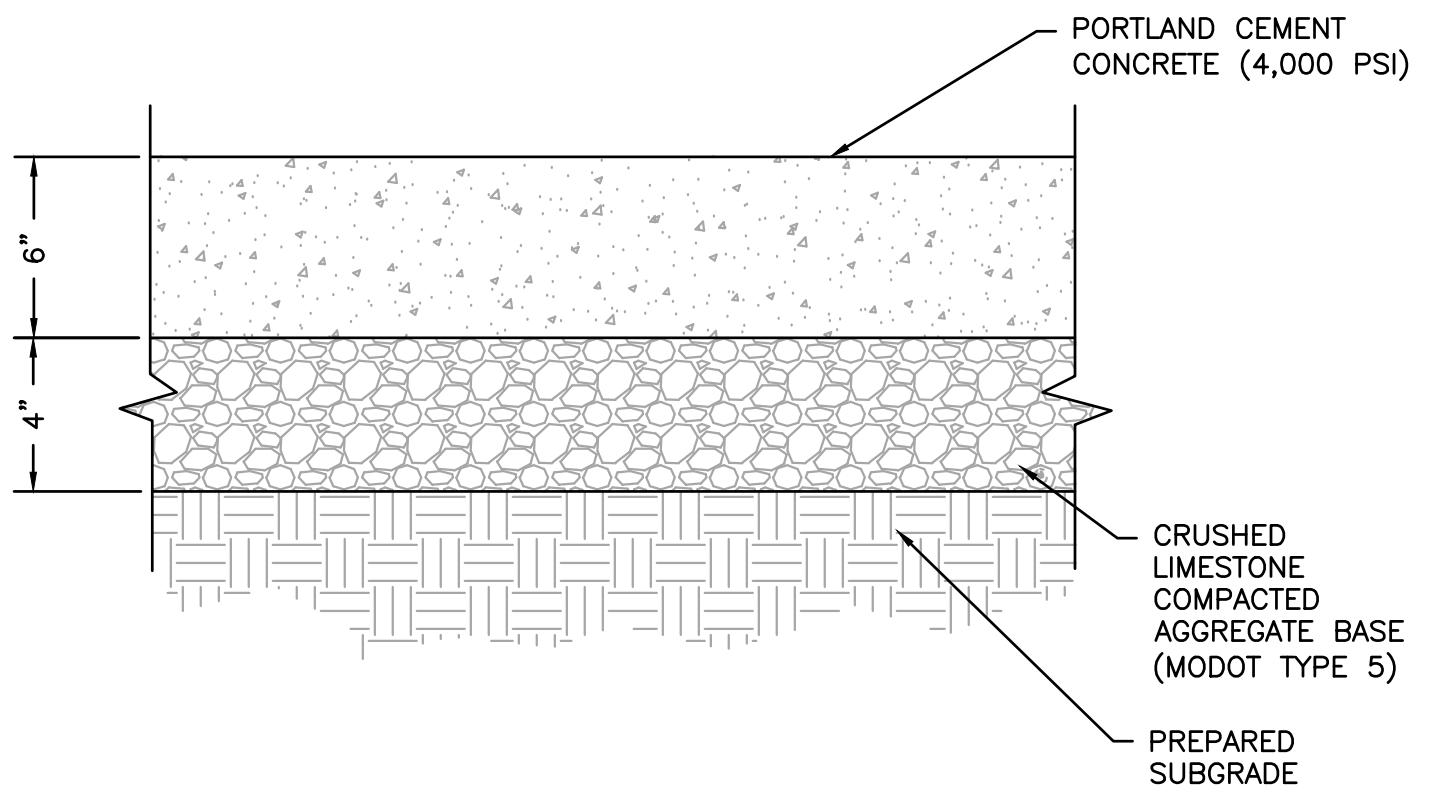


NOTES:
1. MINIMUM PAVEMENT DETAILS SHOWN FOR REFERENCE ONLY. CONTRACTOR TO VERIFY FINAL PAVEMENT REQUIREMENTS WITH GEOTECH REPORT AND/OR OWNER.
2. CONTRACTOR TO INSTALL CONCRETE PAVEMENT JOINTS PER THE AMERICAN CONCRETE INSTITUTES "GUIDE FOR DESIGN AND CONSTRUCTION OF CONCRETE PARKING LOTS". THE JOINT SPACING SHALL BE NO GREATER THAN 15 FEET PER THE GEOTECH REPORT DATED 05/09/2025 BY HOLLAND ENGINEERS.
3. ALL NON-REINFORCED CONCRETE SHALL BE 4,000 PSI AT 28 DAYS.

5 CONCRETE ENTRANCE PAVEMENT DETAIL

SCALE: N.T.S.


REF. DWG. C2.0

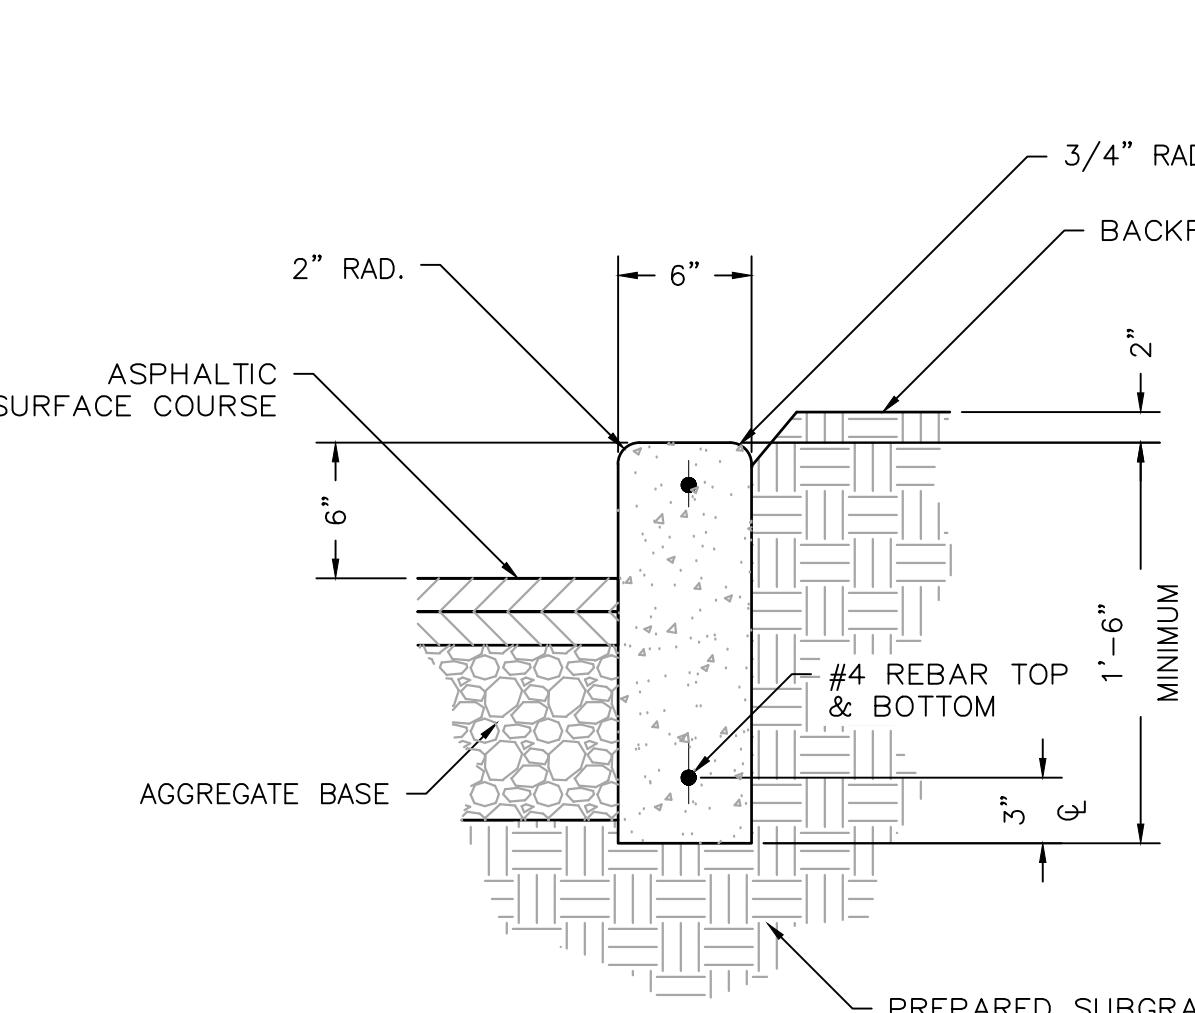

6 VERTICAL CONCRETE CURB DETAIL

SCALE: N.T.S.


REF. DWG. C4.0

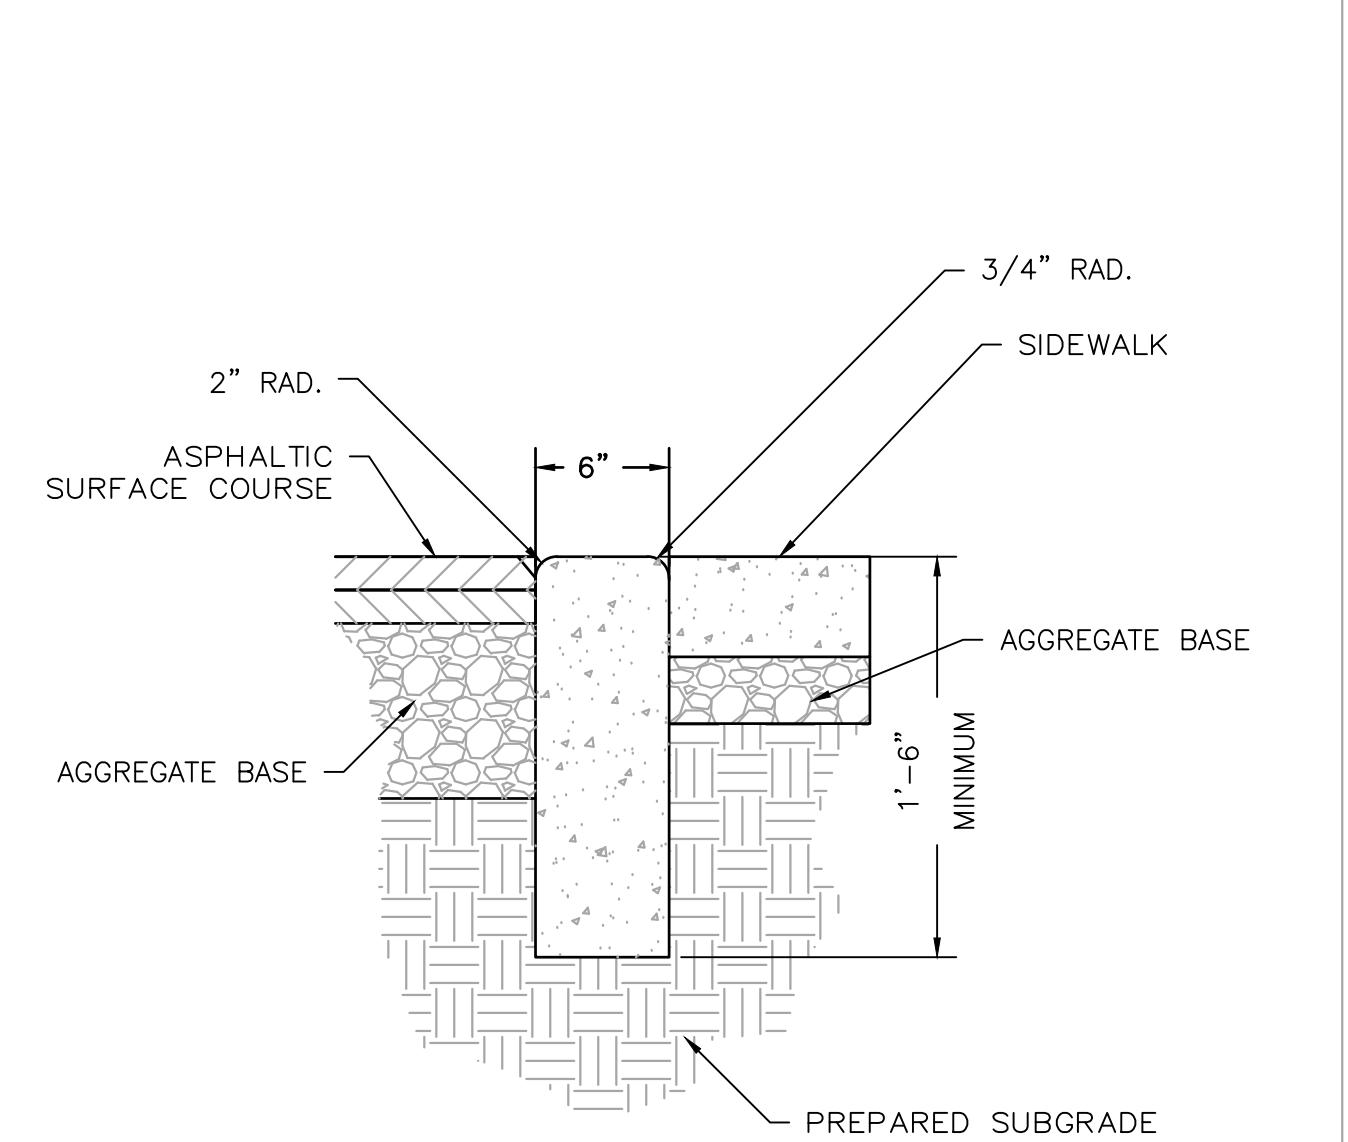

7 6" FLUSH CONCRETE CURB

SCALE: N.T.S.


REF. DWG. C4.0

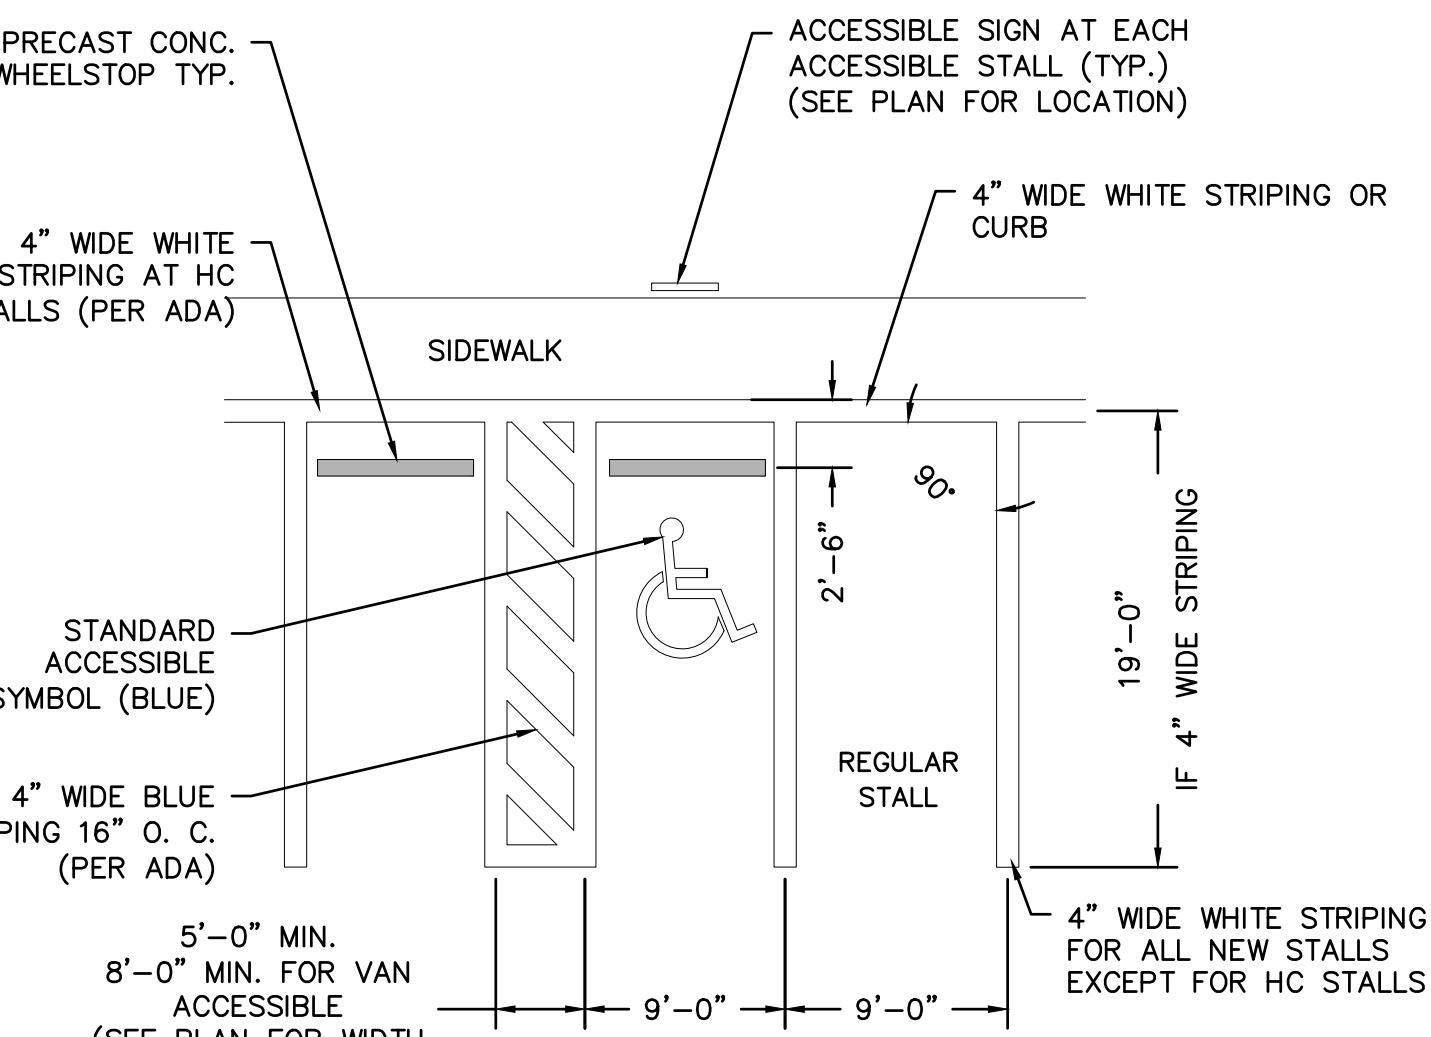

9 90 DEGREE ACCESSIBLE PARKING DETAIL

SCALE: N.T.S.


REF. DWG. C4.0

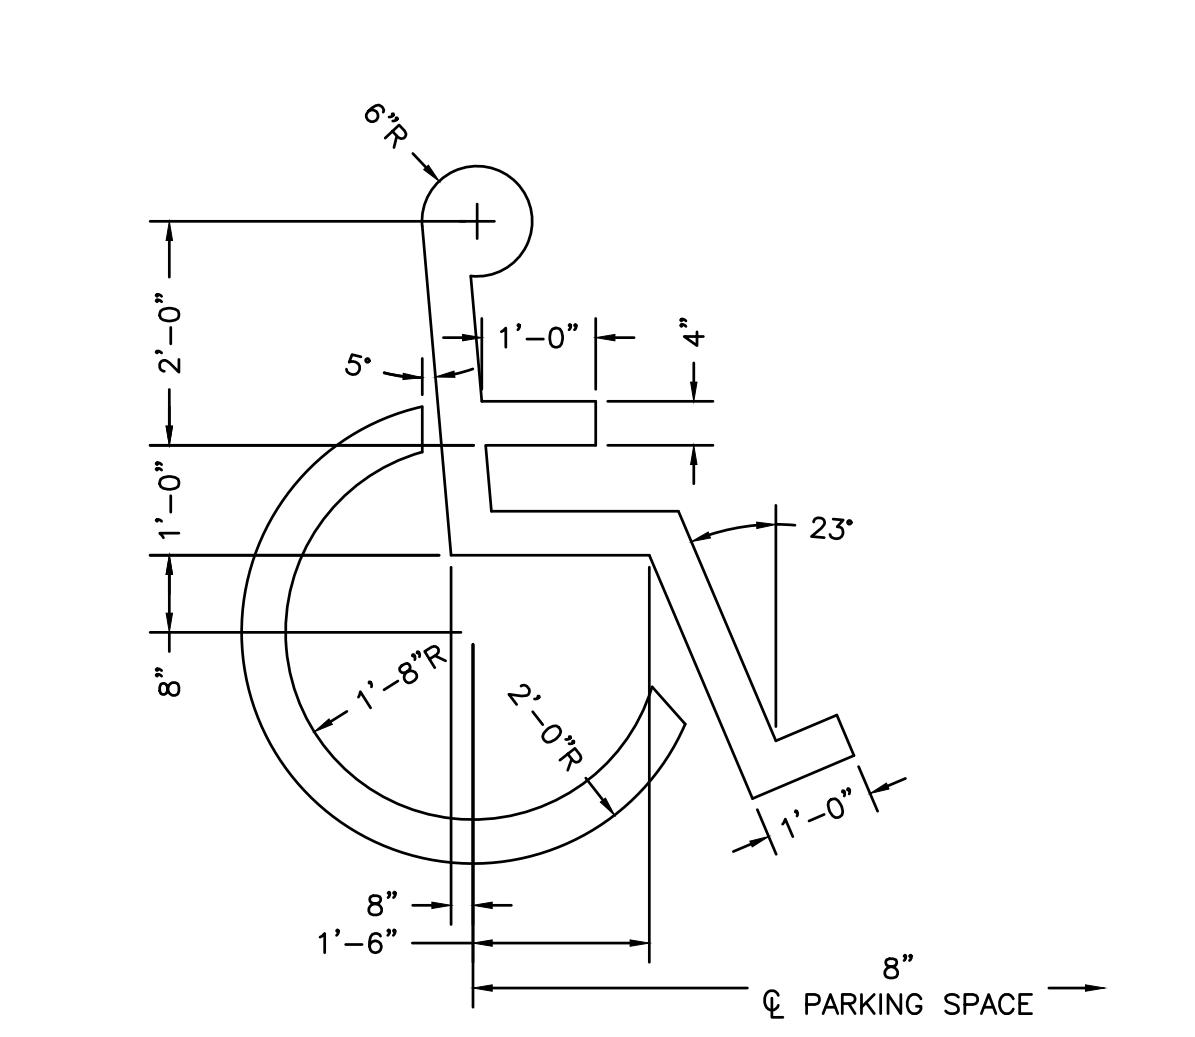

10 ACCESSIBLE PARKING SYMBOL DETAIL

SCALE: N.T.S.


REF. DWG. C4.0

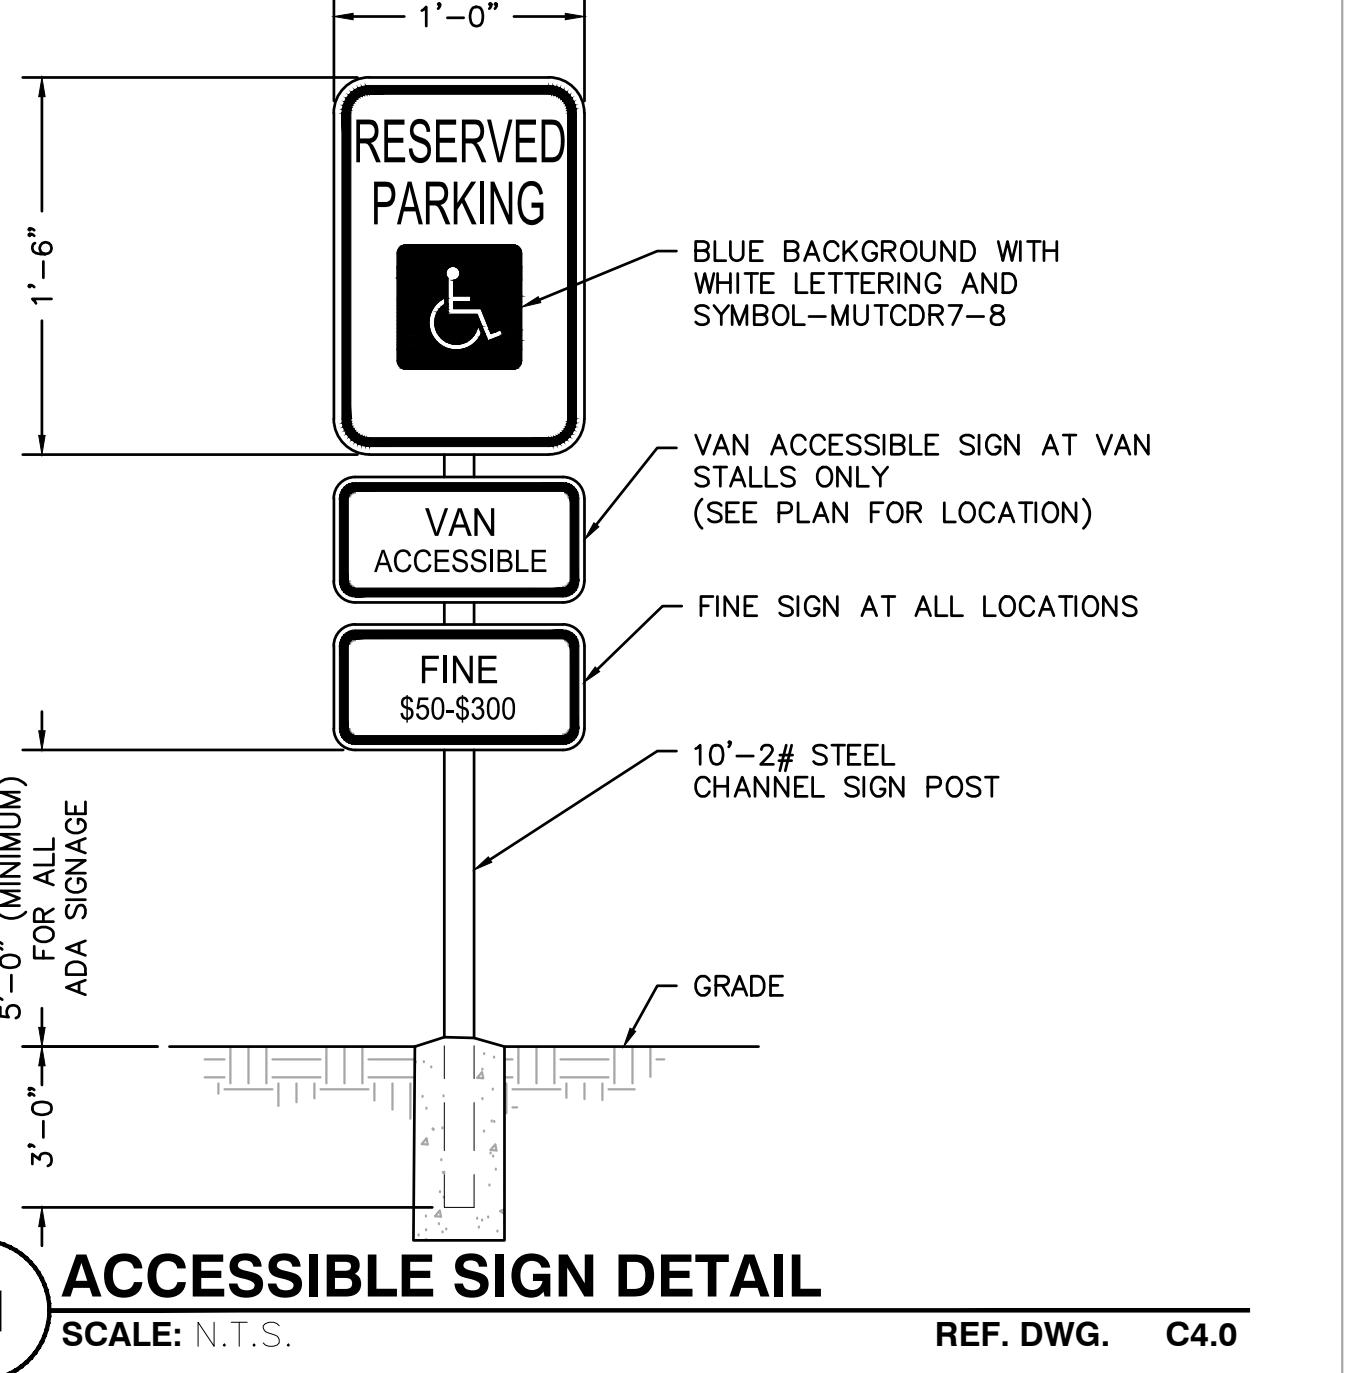

11 ACCESSIBLE SIGN DETAIL

SCALE: N.T.S.

REF. DWG. C4.0

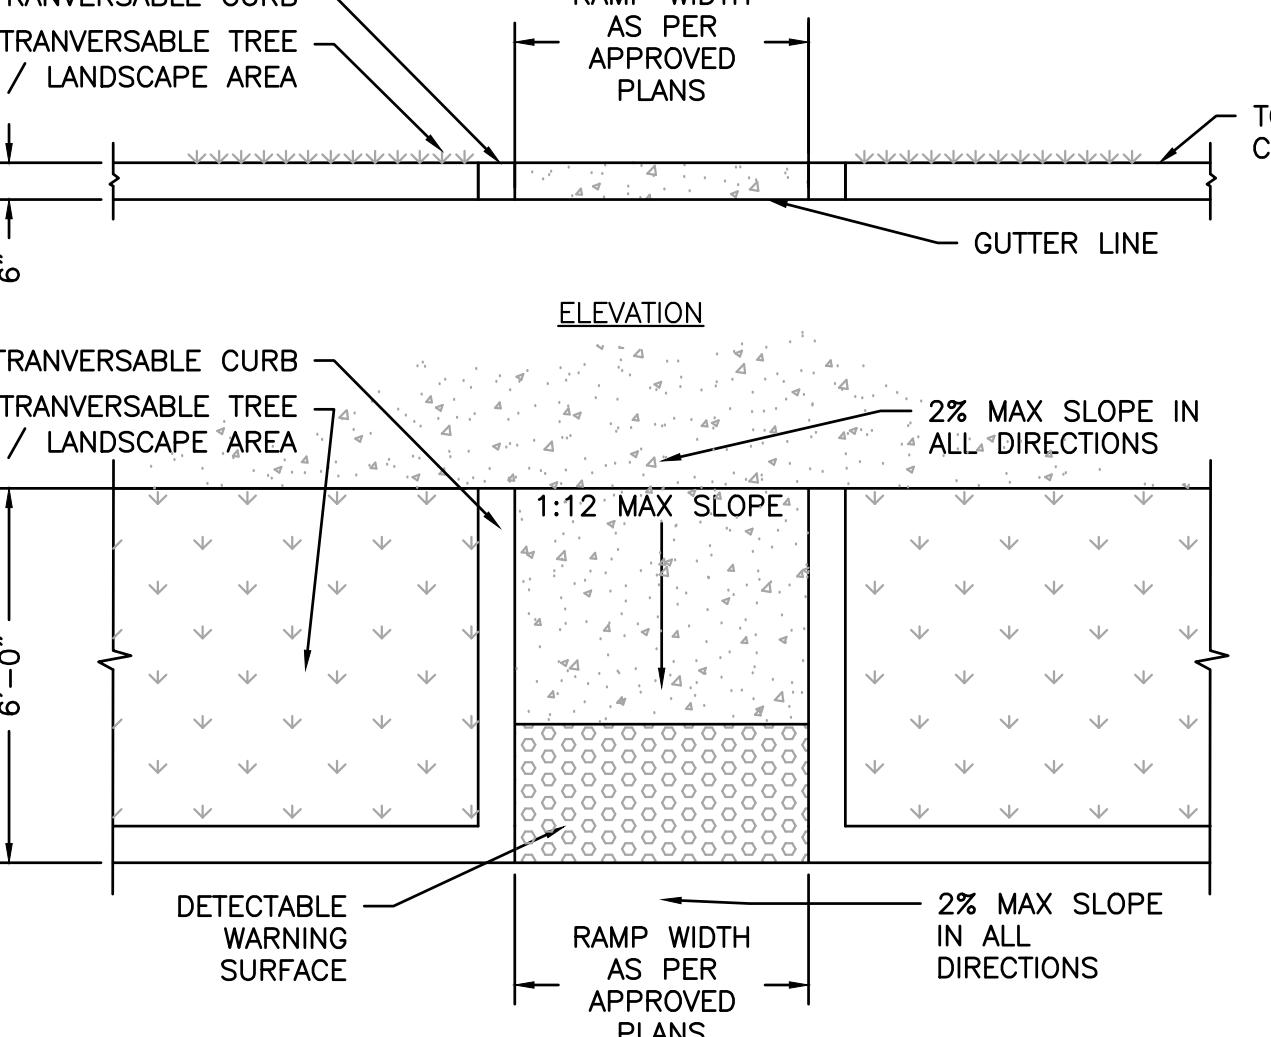

12 ACCESSIBLE RAMP WITH NON-TRaversable CURBS DETAIL

SCALE: N.T.S.

REF. DWG. C4.0