


See Sheet 5 of 18



Note: All low areas will be allowed to drain.

The total yardage for this project is based on a 1% slope tolerance.
 This yardage figure is subject to change, due to soil conditions, storm and weather conditions, weather conditions, and the various conditions actually encountered. A typical 1% slope tolerance is shown. Grades may be required.
 Exact quantities obtained from aerial site map, with contours at two foot intervals, used as a starting point of plan or plan 1 foot at 1% contour interval.
 The estimated bid yardage is to finish grade and does not include removal of substrate.

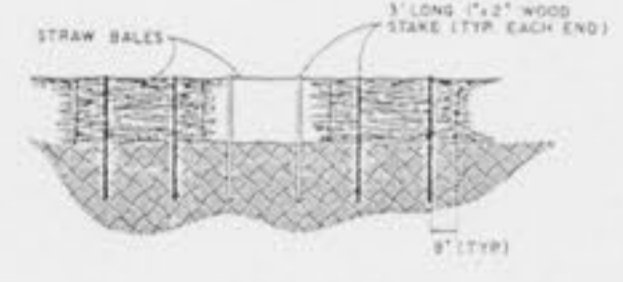

STAKED BALE DETAIL
 N.T.S.

Erosion Control
 EROSION CONTROL SHALL CONSIST OF STRAW BALE ROWS AND BALES TO BE PLACED AT 10' INTERVALS TO A MAXIMUM OF 10' FROM THE GRADING LINE. STRAW BALE ROWS SHALL BE PLACED WITH A ONE FOOT SEPARATION BETWEEN BALS AND STRAW BALS SHALL BE STAKED. IN AREAS WHERE A ROW AND BALS ARE NOT FEASIBLE, A SINGLE ROW OF STRAW BALS SHALL BE PLACED TO THE PROTECTED PROPERTY AND NEAREST-ADJACENT PROPERTIES SHALL BE THE RESPONSIBILITY OF THE GRADING CONTRACTOR OR SUBCONTRACTOR TO PROVIDE APPROPRIATE STRUCTURES TO KEEP SOIL OUT OF STORM DRAIN. STRAW BALS SHALL BE PLACED IN ALL AREAS OF APPROPRIATE STRUCTURES TO KEEP SOIL OUT OF STORM DRAIN. STRAW BALS SHALL BE THE RESPONSIBILITY OF THE GRADING CONTRACTOR TO THE EXTENT OF 50' MINIMUM. ALL STRAW BALS SHALL BE SECURELY ANCHORED AND PROPERLY MAINTAINED UNTIL ALL DISTURBED AREAS ARE COVERED WITH VEGETATION OR MULCH.

PHASE 2-B
 Bid Yardage 56,181 cu. yds.
 (Does Not Include Subgrade)
 TOTAL PHASE 2
 BID YARDAGE 113,685 cu. yds.
 (Does Not Include Subgrade)

