

A SET OF CONSTRUCTION PLANS FOR
A RESUBDIVISION OF LOT 3 OF "O'FALLON TOWN CENTER"
COMMERCE BANK
 A TRACT OF LAND BEING ALL OF LOT 3 OF "O'FALLON TOWN CENTER"
 IN THE SOUTHWEST QUARTER OF SECTION 21, AND THE NORTHWEST
 QUARTER OF SECTION 28, TOWNSHIP 47 NORTH, RANGE 3 EAST OF THE
 FIFTH PRINCIPAL MERIDIAN ST. CHARLES COUNTY, MISSOURI

O'FALLON NOTES

- Underground utilities have been plotted from available information and therefore their locations shall be considered approximate only. The verification of the location of all underground utilities, either shown or not shown on these plans shall be the responsibility of the contractor, and shall be located prior to any grading or construction of the improvements.
- All filled places under proposed storm and sanitary sewer, proposed roads, and/or paved areas shall be compacted to 95% of the maximum density as determined by the Modified AASHTO T-180 Compaction Test, or 100% of maximum density as determined by the standard Proctor Test AASHTO T-99. All tests shall be verified by a soils engineer concurrent with grading and backfilling operations. All filled places in proposed roads shall be compacted from the bottom up. All test shall be verified by a soil engineer concurrent with grading and backfilling operations. Ensure the moisture content of the soil in the fill areas is to correspond to the compactive effort as defined by the Standard or Modified Proctor Test. Optimum moisture content shall be determined using the same test that was used for compaction. Soil compaction curves shall be submitted to The City of O'Fallon prior to the placement of fill. Proof rolling may be required to verify soil stability at the discretion of The City of O'Fallon.
- No area shall be cleared without the permission of the Project Engineer.
- The City of O'Fallon shall be notified 48 hours prior to construction for coordination and inspection.
- All existing site improvements disturbed, damaged or destroyed shall be repaired or replaced to closely match pre-construction conditions.
- All construction and materials shall conform to the current construction standards of the City of O'Fallon.
- Any permits, licenses, easements, or approvals required to work on public or private properties or roadways are the responsibility of the developer.
- No slopes shall exceed 3(Horizontal) : 1(Vertical).
- The Contractor shall assume complete responsibility for controlling all siltation and erosion of the project area. The Contractor shall use whatever means necessary to control erosion and siltation including, but not limited to, staked straw bales and/or siltation fabric fences (possible methods of control are detailed in the plan). Control shall commence with grading and be maintained throughout the project until acceptance of the work by the Owner and/or the City of O'Fallon and/or MODOOT. The Contractor's responsibilities include all design and implementation as required to prevent erosion and the depositing of silt. The Owner and/or the City of O'Fallon and/or MODOOT may at their option direct the Contractor in his methods as deemed fit to protect property and improvements. Any depositing of silts or mud on new or existing pavement or in new or existing storm sewers or swales shall be removed after each rain and affected areas cleaned to the satisfaction of the Owner and/or the City of O'Fallon and/or MODOOT.
- Erosion control systems shall not be limited to what is shown on the plan. Whatever means necessary shall be taken to prevent siltation and erosion from entering natural streams and adjacent roadways, properties and ditches.
- All building mounted lights shall be pointed downward and fully screened to prevent light from spilling over onto adjacent properties.
- All ground and roof hvac mechanical units to be screened from view.
- All paving to be in accordance with St. Charles County standards and specifications except as modified by the City of O'Fallon ordinances.
- All sidewalks, curb ramps, ramps and accessible parking spaces shall be constructed in accordance with the current approved "Americans with Disabilities Act Accessibility Guidelines" (ADAAG) along with the required grades, construction materials, specifications and signage. If any conflict occurs between the above information and the plans, the ADAAG guidelines shall take precedence and the contractor prior to any construction shall notify the Project Engineer. Ensure at least one 8' wide handicap access aisle is provided and curb ramps do not project into handicap access aisles.
- Brick shall not be used in the construction of storm or sanitary sewer structures.
- The Contractor shall ensure all storm and sanitary sewer joint shall be gasketed O-Ring Type.
- Lighting walls will be reviewed on the site prior to the final occupancy inspection. Corrections will need to be made if not in compliance with City standards.
- All proposed fencing requires a separate permit through the Planning Division.
- All sign locations and sizes must be approved separately through the Planning Division.
- All sign post and backs and bracket arms shall be painted black using Carboline Rustbond Penetrating Sealer SG and Carboline 133 HB paint (or equivalent as approved by the City of O'Fallon and MODOOT). Sign designating street names shall be on the opposite side of the street from traffic control signs.
- All new utility line shall be located underground.
- All erosion control systems shall be inspected and necessary corrections shall be made within 24 hours of any rainstorm resulting in one-half inch of rain or more.
- All graded areas that are to remain bare for over 2 weeks shall be seeded and mulched per DNR requirements.
- Rip-rap shown at flared ends will be evaluated in the field after installation for effectiveness and field modifier if necessary to reduce erosion on and off-site.
- Marking to be provided on storm sewer inlets. The City will allow the following markers and adhesive procedures only as shown in the table below. "Peel and Stick" adhesive pads will not be allowed.

O'FALLON NOTES (CONTINUED)

Manufacturer	Size	Adhesive	Style	Message (Part #)	Website
ACP International	3 7/8"	Epoxy	Crystal Cap	No Dumping Drains To Waterways (SD-W-CO)	www.acpinternational.com
DAS Manufacturing, Inc.	4"	Epoxy	Standard	No Dumping Drains To Stream (#SDS)	www.dasmanufacturing.com

26. Developer must supply City Construction inspectors with soil reports prior to or during site soil testing. The soil report will be required to contain the following information on soil test curves (Proctor reports) for projects within the City:

- Maximum dry density
- Optimum moisture content
- Maximum and minimum allowable moisture content
- Curve must be plotted to show density from a minimum of 95% Compaction and above as determined by the "Modified AASHTO T-180 Compaction Test" (A.S.T.M.-D-1157) or from a minimum of 100% as determined by the "Standard Proctor Test AASHTO T-99, Method C" (A.S.T.M.-D-698). Proctor type must be designated on document.
- Curve must have at least 5 density points with moisture content and sample locations listed on document.
- Specific gravity.
- Natural moisture content.
- Liquid limit.
- Plastic limit.
- Be advised that if this information is not provided to the City's Construction Inspector the City will not allow grading or construction activities to proceed on any project site.

27. Trees, organic debris, rubble, foundations and other deleterious material shall be removed for the site and disposed in compliance with all applicable laws and regulations. Landfill tickets for such disposal shall be maintained on file by the developer. Burning on site shall be allowed only by permit from the local fire district. If a burn pit is proposed the location and mitigation shall be shown on the grading plan and documented by the soils engineer.

28. HDPE pipe is to be N-12WT or equal and to meet ASTM F1417 water tight field test.

29. If there are any physical changes to MoDOT's right of way, such as grading or entrance modification, MoDOT requests the opportunity to review the plans, there may be improvements to the roadway required to support the proposed development within MoDOT's Access Management Guidelines.

30. Connections at all sanitary or storm structures to be made with A-lock joint or equal.

31. Traffic control is to be per MoDOT or MUTCD whichever is most stringent.

32. All proposed sanitary laterals and sanitary main crossing under pavement must have the proper rock backfill and to required compaction.

33. The City of O'Fallon shall be contacted for utility locates under its maintenance responsibility, this may include water, sanitary, storm and traffic locates.

34. All HVAC and mechanical units on site shall be properly screened as required by City Code. Rooftop units shall be screened by a parapet wall that extends around the entire perimeter of the building; the parapet shall have a minimum height that is at least as tall as the tallest unit mounted on the roof; ground mounted HVAC and mechanical units shall be screened by fencing, vegetation or some other means (approved by the Planning and Zoning Commission) that has a minimum height that is at least as tall as the unit being screened.

GRADING QUANTITIES:

1,781 C.Y. CUT	(INCLUDES SUBGRADES)
26 C.Y. FILL	(INCLUDES 8% SHRINKAGE)
1,755 C.Y. EXCESS	

THE ABOVE GRADING QUANTITY IS APPROXIMATE ONLY, NOT FOR BIDDING PURPOSES. CONTRACTOR SHALL VERIFY QUANTITIES PRIOR TO CONSTRUCTION.



CALL BEFORE YOU DIG!
 1-800-DIG-RITE

STANDARD SYMBOLS & ABBREVIATIONS

TREE OR BUSH	⊗
LIGHT POLE	☆
SANITARY SEWER & MANHOLE	⊙
STORM SEWER & INLET	⊕
MAILBOX	⊠
ELECTRIC LINE	—E—
GAS LINE	—G—
WATER LINE	—W—
TELEPHONE LINE	—T—
CABLE TV LINE	—CATV—
OVERHEAD WIRE	—OHW—
UTILITY POLE	⊙
UTILITY POLE W/ DOWN GUY	⊙
FIRE HYDRANT	⊙
WATER VALVE	⊙
WATER METER	⊙
GAS VALVE	⊙
ROAD SIGN	⊙
TELEPHONE PEDESTAL	⊙ TEL. PED.
FENCE	—X—

DEVELOPMENT NOTES:

- Area of Tract: 0.904 Acres
Area of Disturbance: 0.814 Acres
- Existing Zoning: C-2 (City of O'Fallon)
- Proposed Use: Bank
- Setbacks: 25' Front
0' Side
0' Rear
50' Maximum Building Height
- Current Owner & Developer of Property: Commerce Bank, N.A.
8000 Forsyth Blvd. Suite 1300
St. Louis, MO 63105
(314) 746-8548
- Site is served by: AmerenUE
Locke's Gas Company
City of O'Fallon Water
CenturyTel
Charter Communication
O'Fallon Fire Protection District
City of O'Fallon Sewers

- Flood Note: According to the Flood Insurance Rate Map of St. Charles County, Missouri incorporated areas (Community - panel number 29183 C0237 E, dated August 2, 1996), this property lies within Zone X. Zone X is defined as area determined to be outside the 500 year floodplain.
- Parking Requirements:
Bank Parking:
1 space per 300 sq. ft. of floor area + 1 per 2 employees
4,634 sq. ft. / 300 = 15.45
Employees = 10/2 = 5
Parking Required = 21 spaces
Parking Proposed = 42 spaces (Including 2 Handicap)
- Bicycle Rack Requirements:
1 space per 15 spaces of parking.
42 / 15 = 2.80
Spaces required = 4 minimum
Spaces provided = 4
- Landscape requirements:
1 tree per 40' of street frontage
397.59' / 40' = 9.94 trees required
10 trees required

Not less than 6% of the interior of the parking lot shall be landscaped.
 42 spaces x 270 sq. ft. = 11,340 x 6% = 680.40 sq. ft.
 Required = 680.40 sq. ft.
 Interior landscaping provided = 2,163.61 sq. ft.

- Site Calculations: 39,379.98 sq. ft. of Tract 1
Building area: 4,746 sq. ft. - 12.05%
Landscape area: 6,925.09 sq. ft. - 17.59%
Pavement area: 27,708.89 sq. ft. - 70.36%
- Site to utilize existing dumpster on tract 2.
- Estimated sanitary flow contributed by this site 315 g.p.d.
- Electric transformer to be located on pole per Ameren UE, no screening required.

CITY OF O'FALLON
 COMMUNITY DEVELOPMENT DEPARTMENT
 ACCEPTED FOR CONSTRUCTION
 BY: *[Signature]* DATE: 3-14-08
 PROFESSIONAL ENGINEER'S SEAL
 INDICATES RESPONSIBILITY FOR DESIGN
SHEET INDEX Rev. Grades & Crosswalk

SHEET 1	COVER SHEET
SHEET 2	DEMOLITION PLAN
SHEET 3	SITE PLAN
SHEET 4	GRADING PLAN
SHEET 5	PREDRAINAGE AREA MAP
SHEET 6	POST DRAINAGE AREA MAP
SHEET 7	CONSTRUCTION DETAILS

O'FALLON #307.01
 March 1, 2007

PRINCIPLES & STANDARDS:

- All excavations, grading, or filling shall have a finished grade not to exceed a 3:1 slope (33 %). Steeper grades may be approved by the designated official if the excavation is through rock or the excavation or the fill is adequately protected (a designed head wall or toe wall may be required). Retaining walls that exceed a height of four (4) feet shall require the construction of safety guards as identified in the appropriate section(s) of the adopted BOCA Codes and must be approved by the Building Department. Permanent safety guards will be constructed in accordance with the appropriate section(s) of the adopted BOCA Codes.
- Sediment and erosion control plans for sites that exceed 20,000 square feet of grading shall provide for sediment or debris basins, silt traps or filters, staked straw bales or other approved measures to remove sediment from run-off waters. The design to be approved by the Designated Official. Temporary siltation control measures (structural) shall be maintained until vegetative cover is established at a sufficient density to provide erosion control on the site.
- Where natural vegetation is removed during grading, vegetation shall be reestablished in such a density as to prevent erosion. Permanent type grasses shall be established as soon as possible during the next seeding period after grading has been completed.
- When grading operations are completed or suspended for more than 14 days permanent grass must be established at sufficient density to provide erosion control on the site. Between permanent grass seeding periods, temporary cover shall be provided according to the City Engineer's recommendations. All finished grades (areas not to be disturbed by future improvement) in excess of 20% slopes (5:1) shall be mulched and tacked at the rate of 100 pounds per 1,000 square feet when seeded.
- Provisions shall be made to accommodate the increased runoff caused by changed soils and surface conditions during and after grading. Unvegetated open channels shall be designed so that gradients result in velocities of 2 fps (feet per second) or less. Open channels with velocities more than 2 fps and less than 5 fps shall be established in permanent vegetation by use of commercial erosion control blankets or lined with rock rip rap or concrete or other suitable materials as approved by the City Engineer. Detention basins, diversions, or other appropriate structures shall be constructed to prevent velocities above 5 fps.
- The adjoining ground to development sites (lots) shall be provided with protection from accelerated and increased surface water, silt from erosion, and any other consequence of erosion. Run-off water from developed areas (parking lots, paved sites and buildings) above the area to be developed shall be directed to diversions, detention basins, concrete gutters and/or underground outlet systems. Sufficiently anchored straw bales may be temporarily substituted with the approval of the City Engineer.
- Development along natural watercourses shall have residential lot lines, commercial or industrial improvements, parking areas or driveways set back a minimum of 25 feet from the top of the existing stream bank. The watercourse shall be maintained and made the responsibility of the subdivision trustees or in the case of a site plan by the property owner. Permanent vegetation should be left intact. Variances will include designed stream bank erosion control measures and shall be approved by the City Engineer, FEMA and U.S. Army Corps of Engineers guidelines shall be followed where applicable regarding site development areas designated as flood plains and wetlands.
- All lots shall be seeded and mulched at the minimum rates defined in Appendix A or sodded before an occupancy permit shall be issued except that a temporary occupancy permit may be issued by the Building Department in cases of undue hardship because of unfavorable ground conditions.

**VEGETATIVE ESTABLISHMENT
 For Urban Development Sites
 APPENDIX A**

- Seeding Rates:
- Permanent:
 Tall Fescue - 30 lbs./ac.
 Smooth Brome - 20 lbs./ac.
 Combined Fescue @ 15 lbs./ac. and Brome @ 10 lbs./ac.
- Temporary:
 Wheat or Rye - 150 lbs./ac. (3.5 lbs. per square foot)
 Oats - 120 lbs./ac. (2.75 lbs. per square foot)
- Seeding Periods:
 Fescue or Brome - March 1 to June 1
 August 1 to October 1
 Wheat or Rye - March 15 to November 1
 Oats - March 15 to September 15
- Mulch Rates:
 100 lbs. per 1,000 sq. feet (4,356 lbs. per acre)
- Fertilizer Rates:
 Nitrogen 30 lbs./ac.
 Phosphate 30 lbs./ac.
 Potassium 30 lbs./ac.
 Lime 600 lbs./ac. ENM*
- * ENM = effective neutralizing material as per State evaluation of quarried rock.


U.S.G.S. BENCHMARKS

REFERENCE BENCHMARK: RM 59 ELEV 526.36
 CHISELED SQUARE IN THE EAST END OF THE ASPHALT STREET, AT THE SOUTHEAST CORNER OF PLACKMEIR DRIVE AND ERNST PLACE.

SITE BENCHMARK: ELEV 628.37
 OLD IRON ROD (BENT) AT NORTHEAST CORNER OF SITE. AS SHOWN.

COMMERCE BANK - O'FALLON
PREPARED FOR:
 ARCTURIS
 1910 PINE STREET
 ST. LOUIS, MO 63103
 (314) 206-7138

DISCLAIMER OF RESPONSIBILITY
 I hereby certify that this document intended to be authenticated by my seal and are limited to this sheet, and I hereby disclaim any responsibility for all other drawings, specifications, estimates, reports or other documents or instruments relating to or intended to be used for any part or parts of the architecture or engineering project or survey.

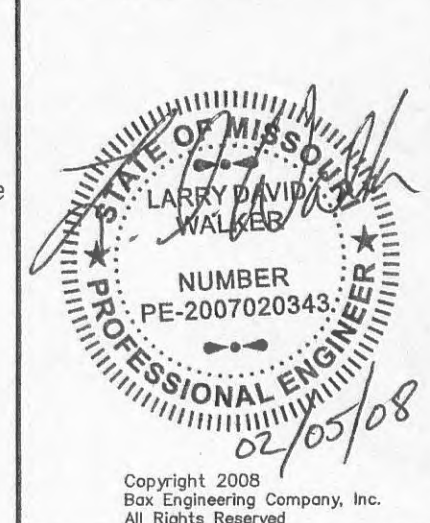

REVISIONS	
12-10-07	Per City Comments
12-11-07	Addendum B
12-14-07	Addendum D
1-15-08	Per City Comments
1-17-08	Revision 1
2-11-08	Revision 2/City
2-21-08	Revision 3

BA

**ENGINEERING
 PLANNING
 SURVEYING**

221 Point West Blvd.
 St. Charles, MO 63301
 636-928-5552
 FAX 928-1718

10-23-07
 DATE
 98-10195CA
 PROJECT NUMBER
 1 OF 7
 SHEET OF
 10195CAcon.dwg
 FILE NAME
 ALJ
 DRAWN
 ALJ CAL
 DESIGNED CHECKED

Const. Inspector