




PUBLIC SANITARY SEWER PROFILE
 HORIZONTAL SCALE: 1"=20'
 VERTICAL SCALE: 1"=10'

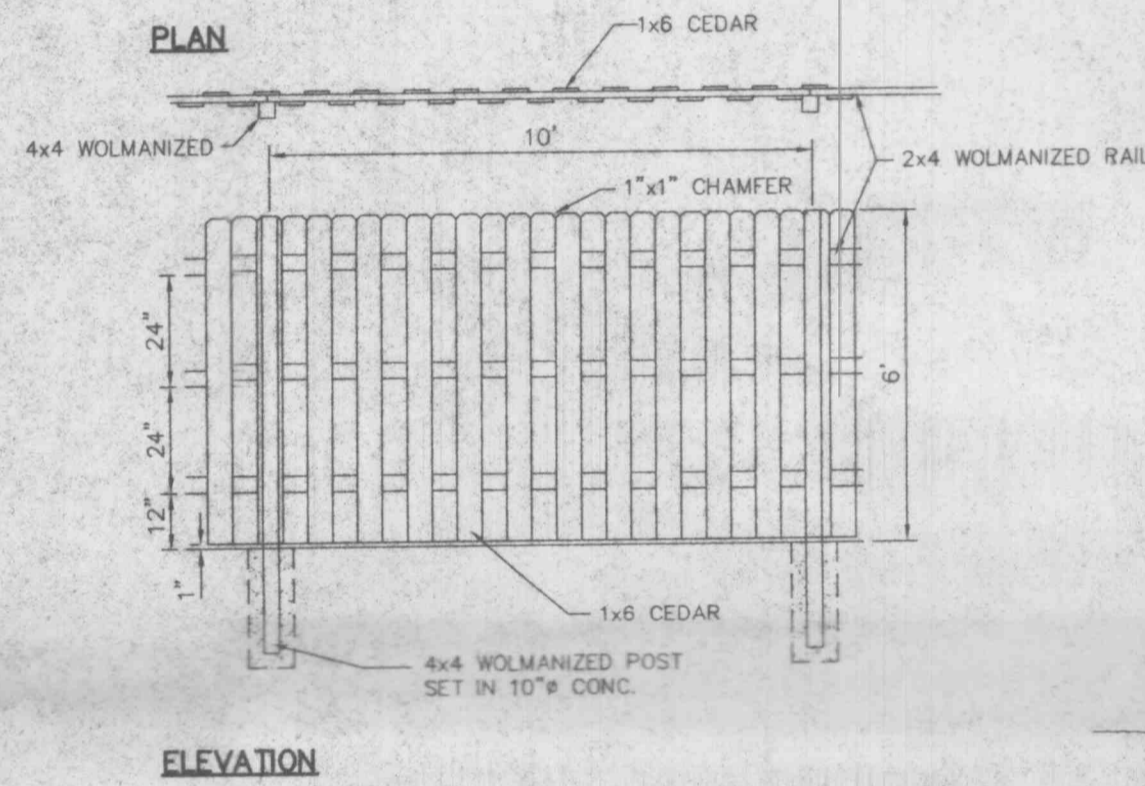


SCREEN FENCE DETAIL
 NOT TO SCALE

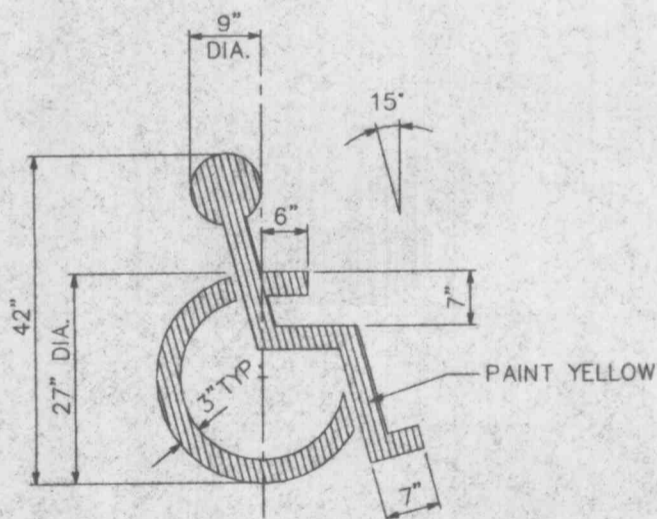

PAINTED HANDICAPPED PARKING SYMBOL
 NOT TO SCALE

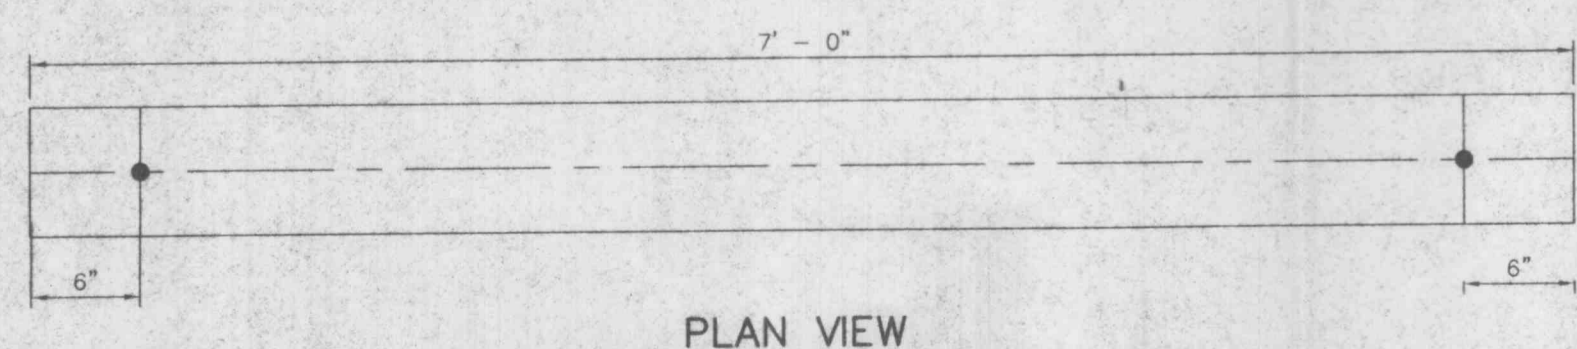


PLAN VIEW




SECTION


NOTES: To anchor wheel stop, use 2 - #4 bars 24" long. Similar shape may be used upon approval of the engineer.

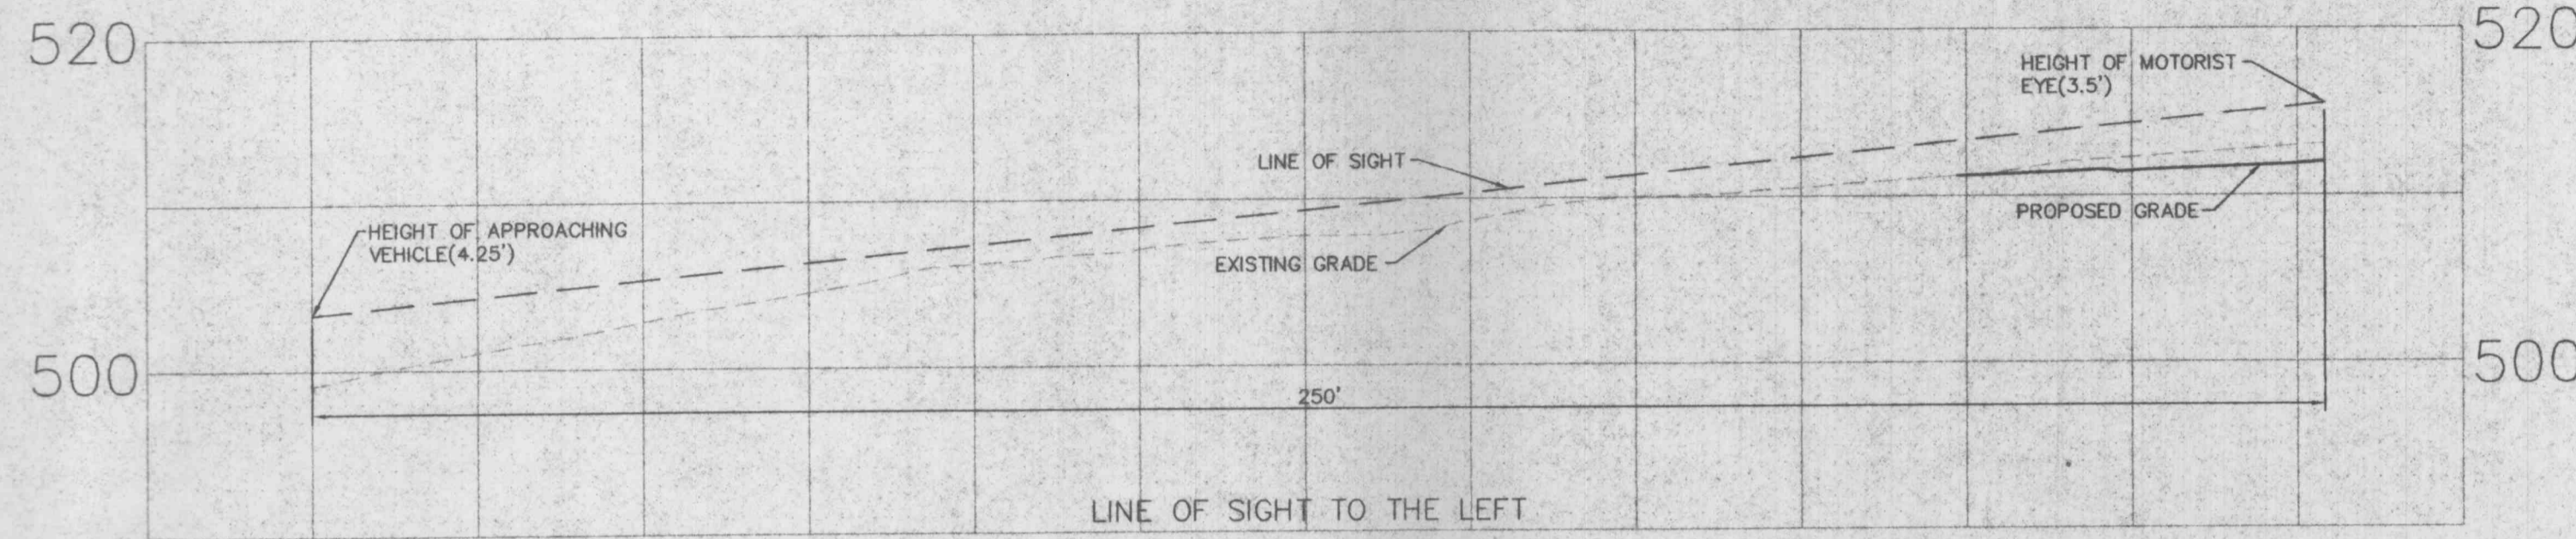

HORIZONTAL SCALE: 1"=20' VERTICAL SCALE: 1"=10'

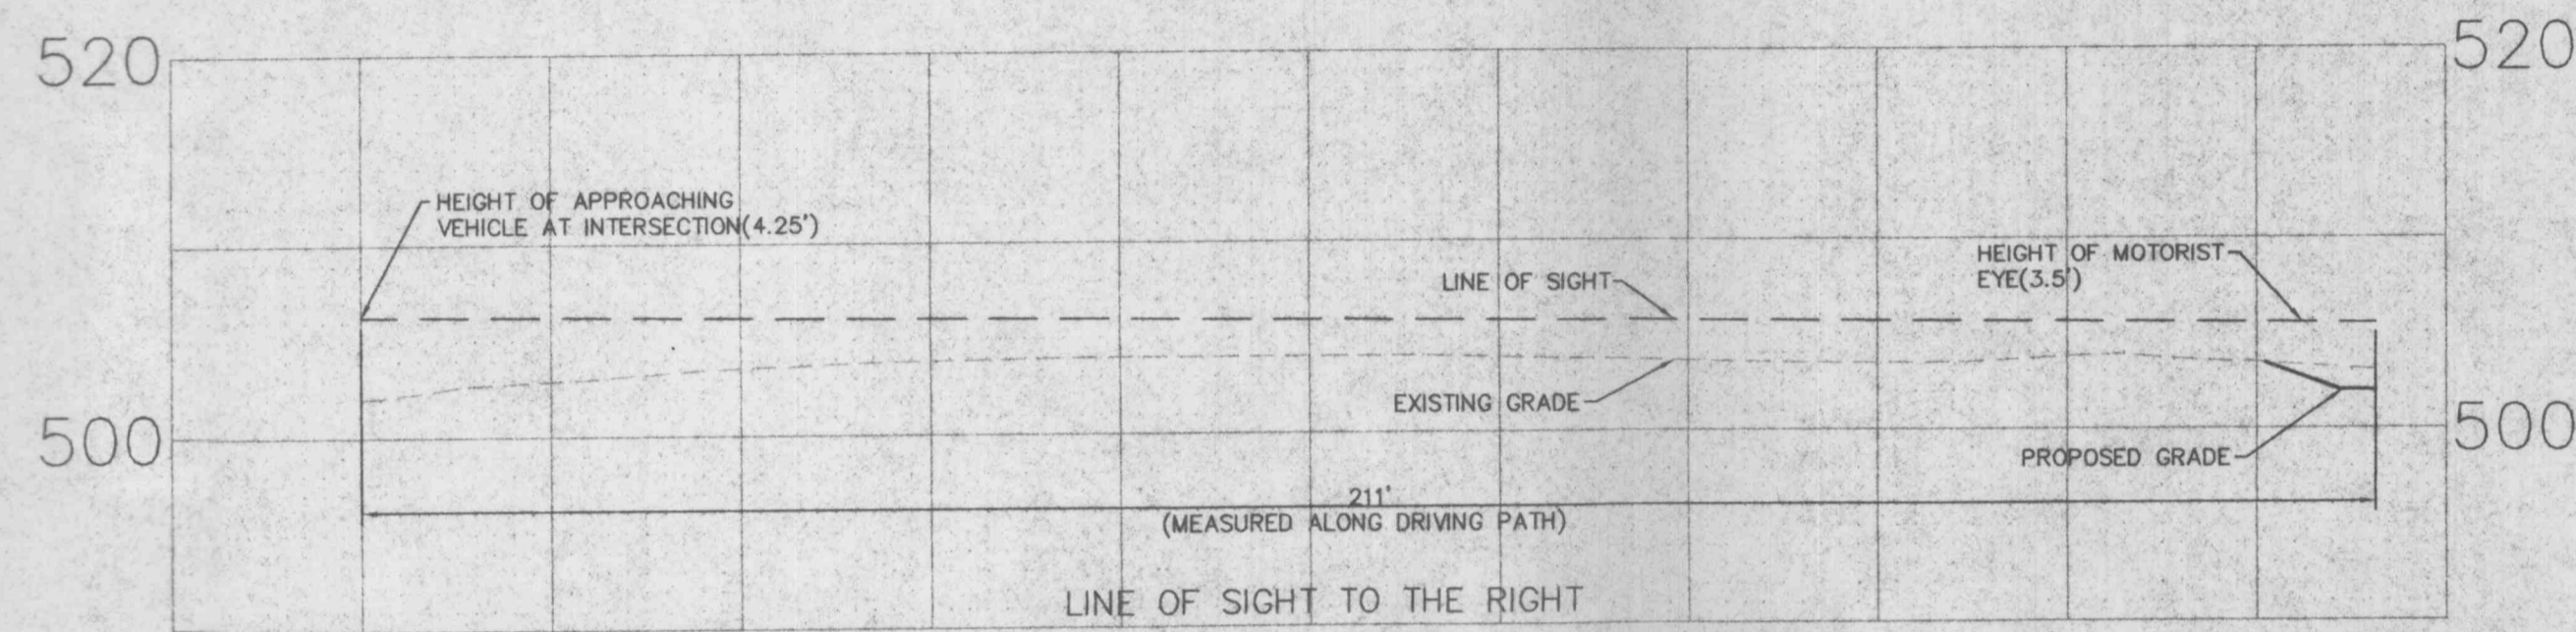


LINE OF SIGHT TO THE RIGHT

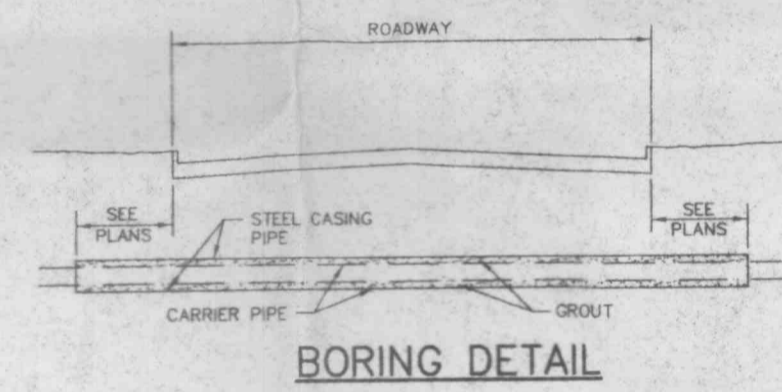


BORING DETAIL

- NOTES:
- 1.) INSIDE DIAMETER OF CASING PIPE TO BE A MINIMUM OF 4" GREATER THAN COUPLING DIAMETER OF CARRIER PIPE.
 - 2.) ENCASMENTS TO BE INSTALLED UNDER THE ROAD BY MEANS OF JACKING IT THROUGH, OR BY DRY-BORING A HOLE THAT WILL RECEIVE THE CASING WITH A SNUG FIT.
 - 3.) THE OUTSIDE DIAMETER OF THE CASING SHALL NOT BE LESS THAN, NOR MORE THAN ONE INCH GREATER THAN THE BORED HOLE.
 - 4.) THE ANNULAR SPACE BETWEEN THE CASING PIPE AND THE BORED HOLE SHALL BE FILLED WITH GROUT.

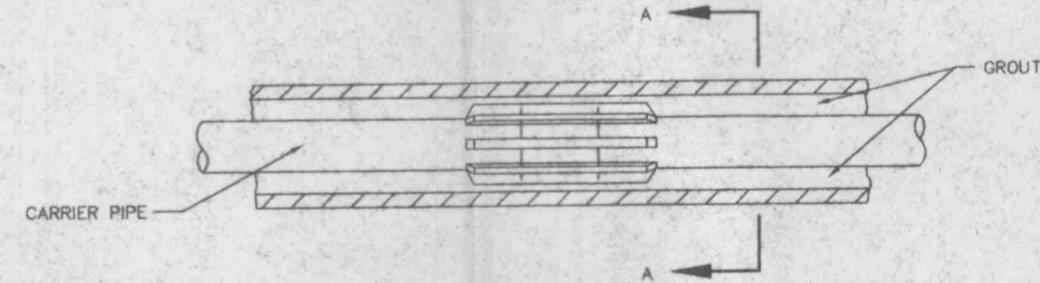


SECTION A - A

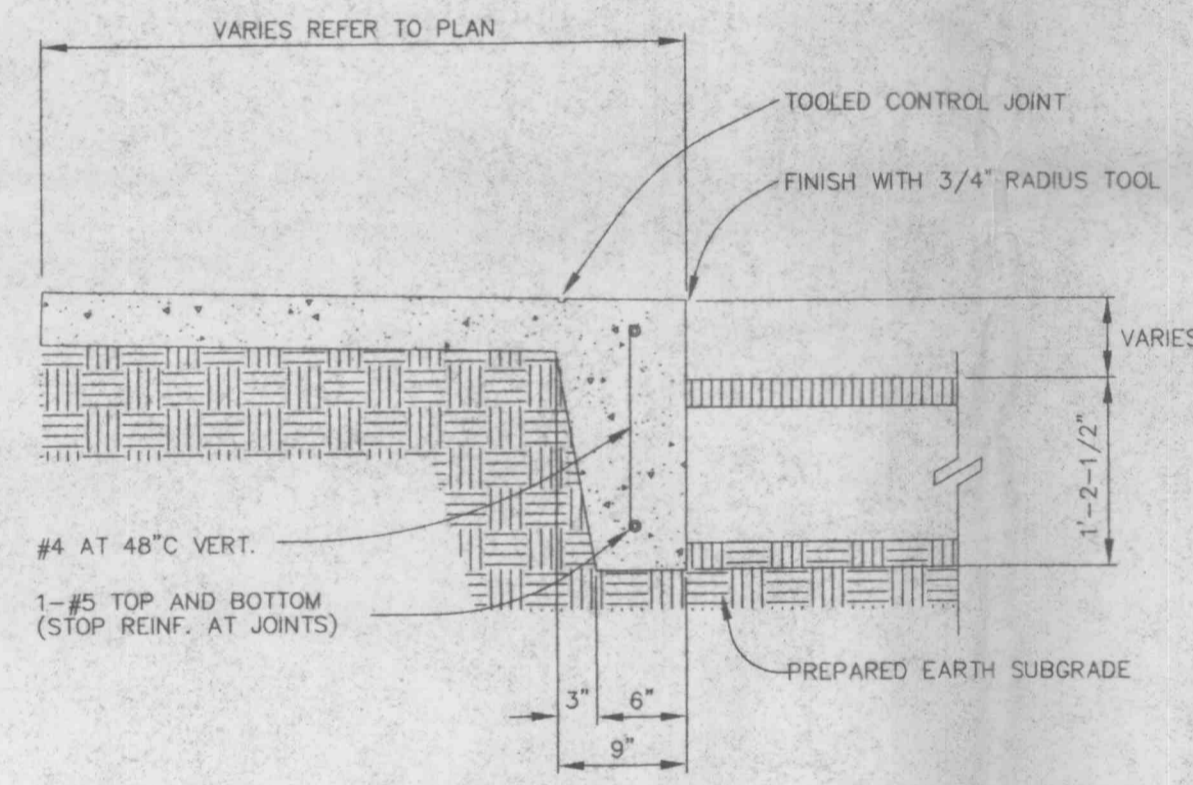


PROVIDE 1/2" PREMOLDED EXPANSION JOINT FILLER AT 60" CENTERS. PROVIDE TOOLED CONTRACTION JOINTS AT 10' C.C.

TURNED DOWN CONCRETE WALK
 NOT TO SCALE

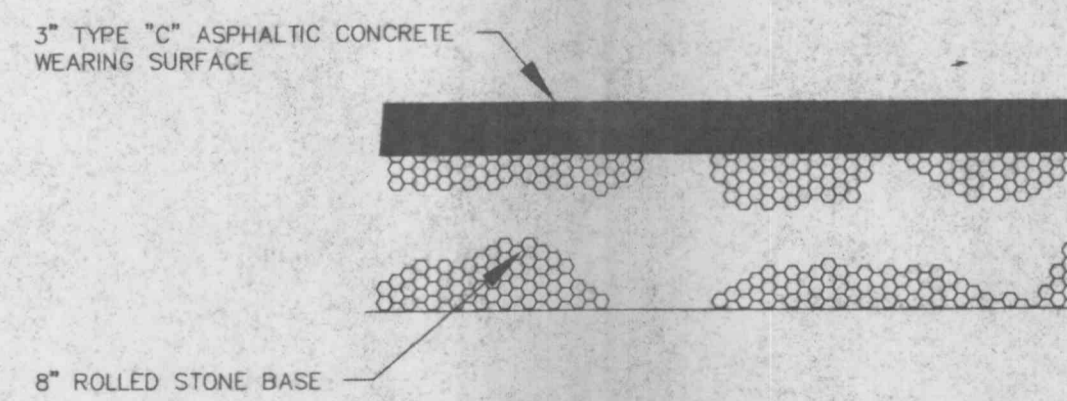

ASPHALT PAVEMENT DETAIL
 NOT TO SCALE

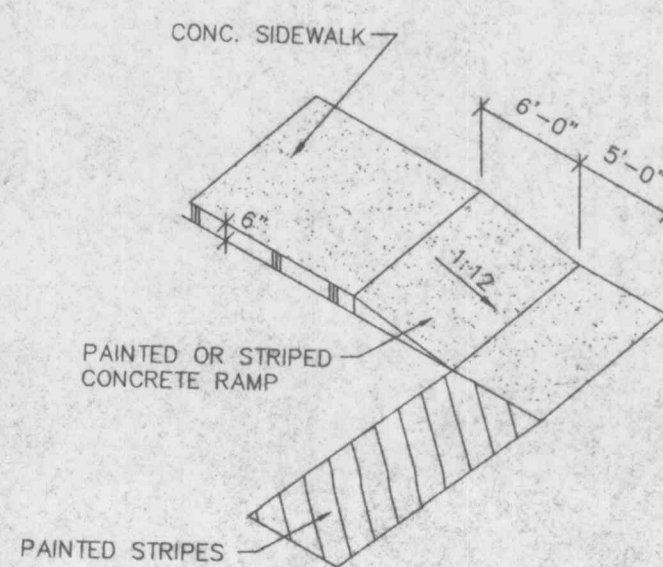


HANDICAPPED RAMP DETAIL
 NOT TO SCALE




STANDARD SIGN FACE, STANDARD HIGHWAY DEPARTMENT, OR CITY STREET DEPARTMENT GAUGE, BLACK OR BLUE LETTERING, GALVANIZED STEEL POST 9'-6" LONG, SET 3'-0" INTO GRADE, SET BOTTOM OF SIGN 5'-0" ABOVE FINISHED GRADE.

HANDICAP PARKING SIGN
 NOT TO SCALE

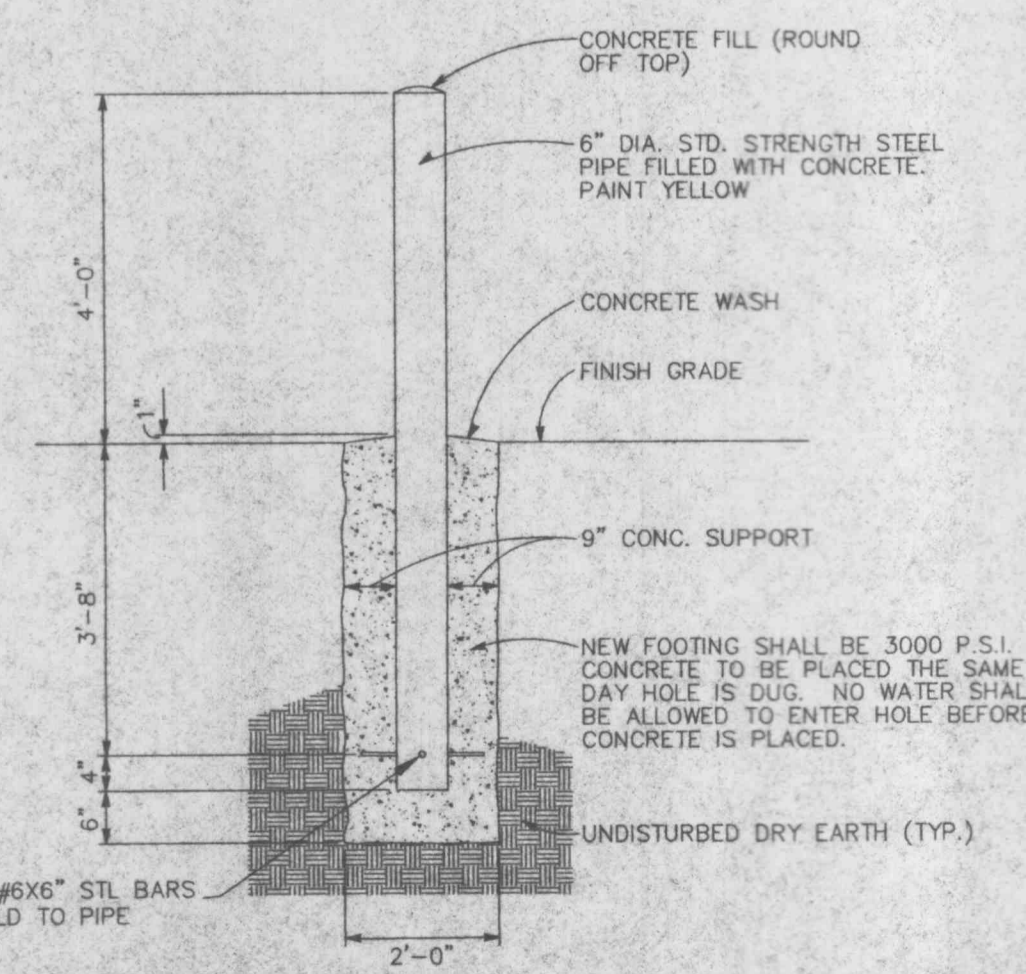


PIPE BOLLARD DETAIL
 NOT TO SCALE

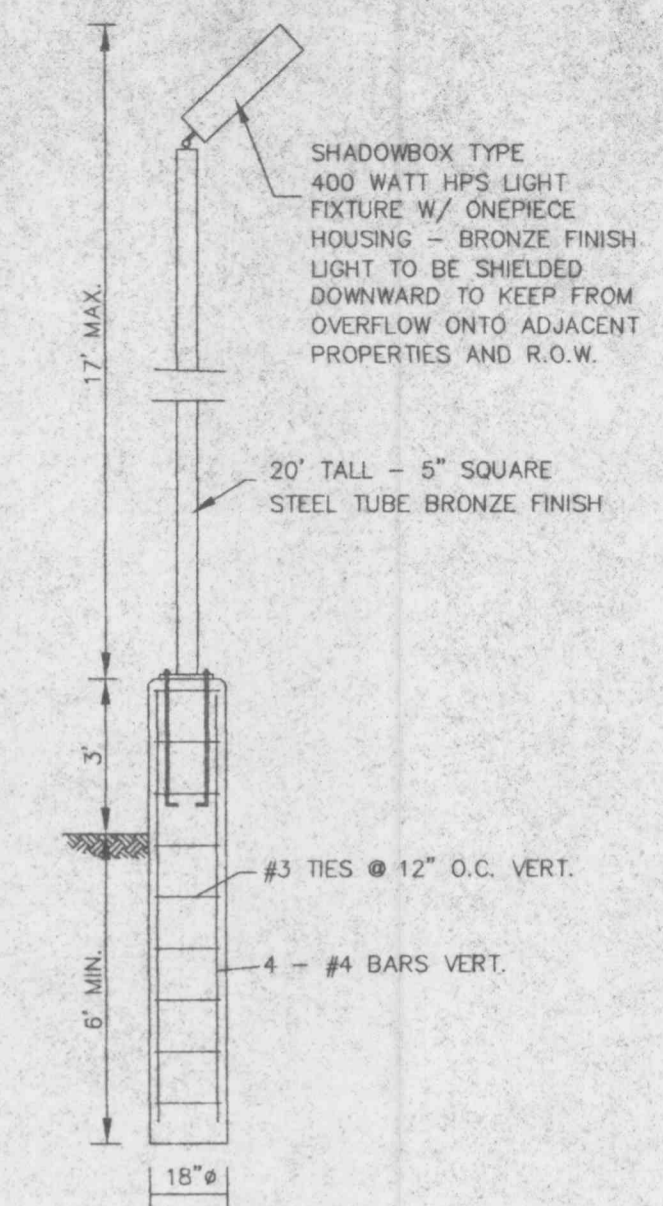


THE MAXIMUM HEIGHT OF THE PROPOSED LIGHTING SHALL BE 20 FEET. THE LIGHTING ON THE WEST SIDE OF THE SITE, ADJACENT TO RESIDENTIAL PROPERTIES, MUST BE LOWER THAN 20 FEET.


LIGHT POLE & BASE
 NOT TO SCALE

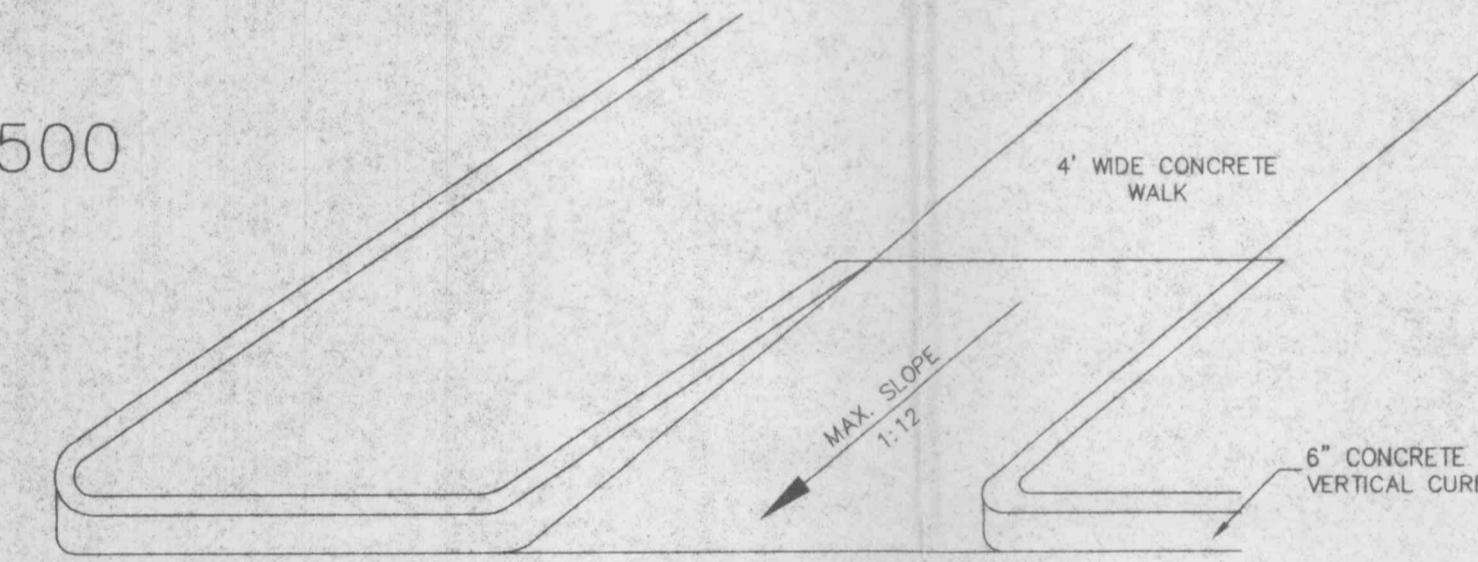

HANDICAPPED RAMP DETAIL
 NOT TO SCALE

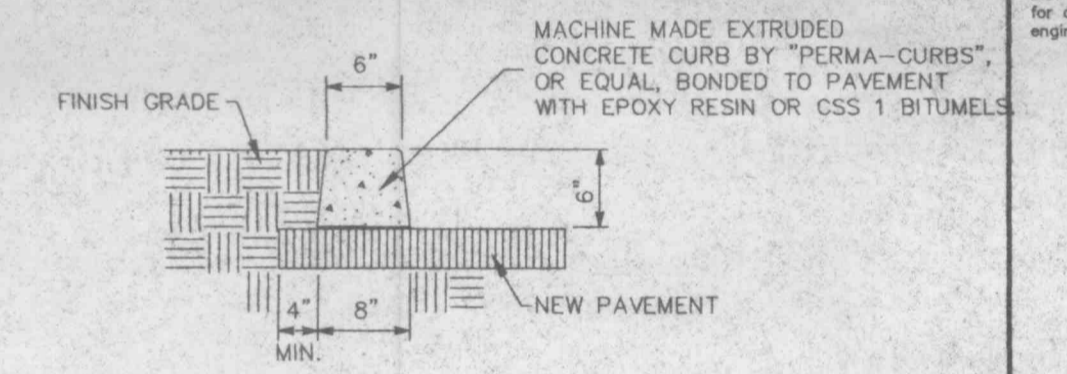


ALTERNATE CONCRETE VERTICAL CURB
 NOT TO SCALE

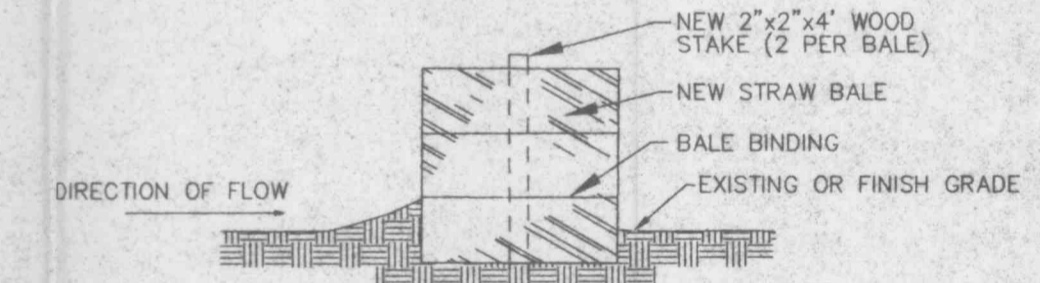

- NOTES:
1. STRAW BALES, NOT HAY BALES SHALL BE USED.
 2. BUTT ENDS OF BALES TIGHTLY TOGETHER.
 3. INSTALL BALES WITH BINDING AROUND SIDES, NOT TOP AND BOTTOM.
 4. FILL ANY GAP BETWEEN BALES BY WEDGING LOOSE STRAW BETWEEN THEM.

SEDIMENT BARRIER
 NOT TO SCALE

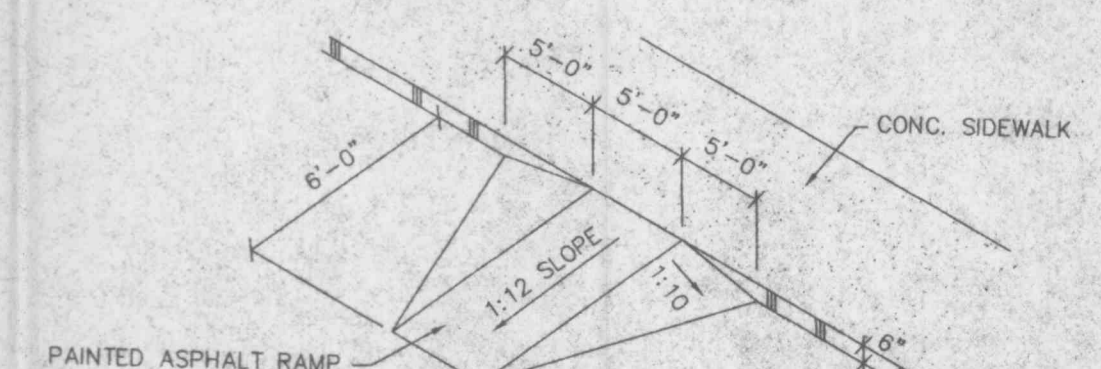

HANDICAPPED RAMP DETAIL
 NOT TO SCALE

PREPARED AND FIRST CHOICE PROPERTIES DEVELOPED FOR: 1508 BILTMORE WAY ST. PETERS, MO 63376 JOHN SCRUGGS (314)-926-7250

DISCLAIMER OF RESPONSIBILITY: I hereby certify that the documents intended to be authorized by my seal are limited to this sheet, and I hereby disclaim any responsibility for all other drawings, specifications, estimates, reports or other documents or instruments resulting in or intended to be used for any part or parts of the architectural or engineering project or survey.

Copyright 1997
 All Rights Reserved

REVISIONS

NO.	DATE	DESCRIPTION
03-10-98		LIGHT DETAIL



ENGINEERING PLANNING SURVEYING

1052 South Cloverleaf Drive
 St. Peters, MO. 63376-6445
 314-928-5552
 FAX 928-1718

9-25-97
 DATE
 97-8954A
 PROJECT NUMBER
 2 OF 3
 SHEET OF
 8954ACON.DWG
 FILE NAME
 SCL RLF
 DRAWN CHECKED