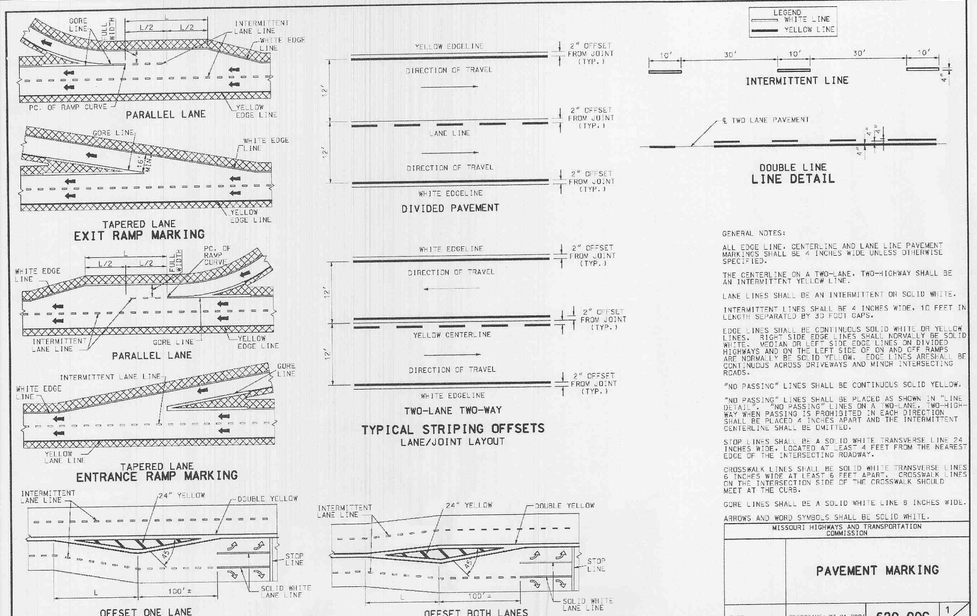

GENERAL NOTES:

ALL EDGE LINES, CENTERLINE AND LANE LINE PAVEMENT MARKINGS SHALL BE 4 INCHES WIDE UNLESS OTHERWISE SPECIFIED.

THE CENTERLINE ON A TWO-LANE, TWO-HIGHWAY SHALL BE AN INTERMITTENT YELLOW LINE.

LANE LINES SHALL BE AN INTERMITTENT OR SOLID WHITE.

INTERMITTENT LINES SHALL BE 4 INCHES WIDE, 10 FEET IN LENGTH SEPARATED BY 30 FOOT GAPS.

EDGE LINES SHALL BE CONTINUOUS SOLID WHITE OR YELLOW LINES. "RIGHT" SIDE EDGE LINES SHALL NORMALLY BE SOLID WHITE. MEDIAN OR LEFT SIDE EDGE LINES ON DIVIDED HIGHWAYS AND ON THE LEFT SIDE OF ON AND OFF RAMPS ARE NORMALLY BE SOLID YELLOW. EDGE LINES ARE SHALL BE CONTINUOUS ACROSS DRIVEWAYS AND MINOR INTERSECTING ROADS.

"NO PASSING" LINES SHALL BE CONTINUOUS SOLID YELLOW.

"NO PASSING" LINES SHALL BE PLACED AS SHOWN IN "LINE DELINEATION". "NO PASSING" LINES ON A TWO-LANE, TWO-HIGHWAY WHEN PASSING IS PROHIBITED IN EACH DIRECTION SHALL BE PLACED 4 INCHES APART AND THE INTERMITTENT CENTERLINE SHALL BE OMITTED.

STOP LINES SHALL BE A 12 INCH WHITE TRANSVERSE LINE 24 INCHES WIDE, LOCATED AT LEAST 4 FEET FROM THE NEAREST EDGE OF THE INTERSECTING ROADWAY.

CROSSWALK LINES SHALL BE SOLID WHITE TRANSVERSE LINES 6 INCHES WIDE AT LEAST 6 FEET APART. CROSSWALK LINES ON THE INTERSECTION SIDE OF THE CROSSWALK SHOULD MEET AT THE CURB.

GORE LINES SHALL BE A SOLID WHITE LINE 8 INCHES WIDE.

ARROWS AND WORD SYMBOLS SHALL BE SOLID WHITE.

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION			
	PAVEMENT MARKING		
DATE:	EFFECTIVE: 07-01-2004	620.00C	1/3

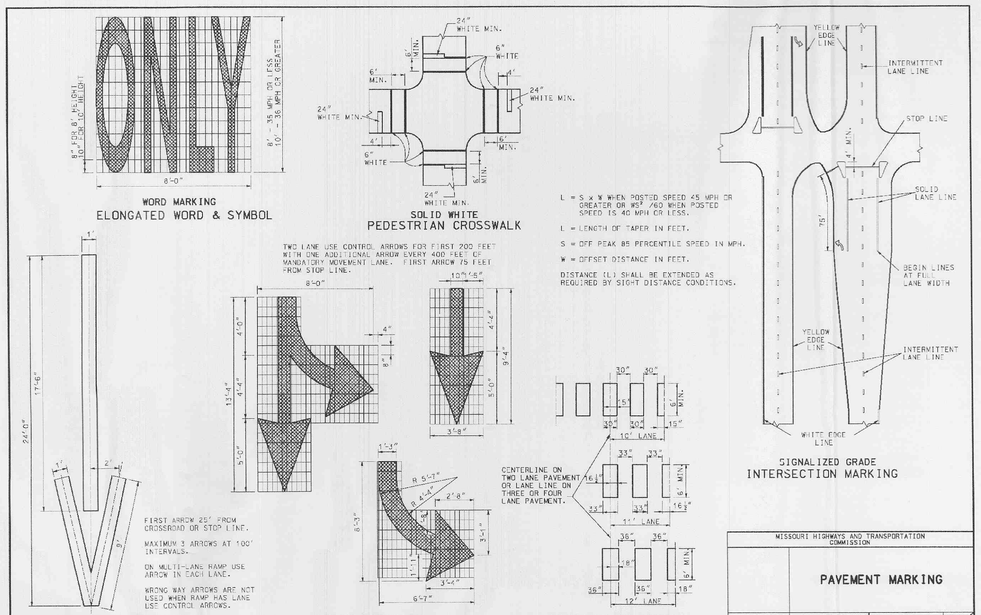

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION			
	PAVEMENT MARKING		
DATE:	EFFECTIVE: 07-01-2004	620.00C	2/3

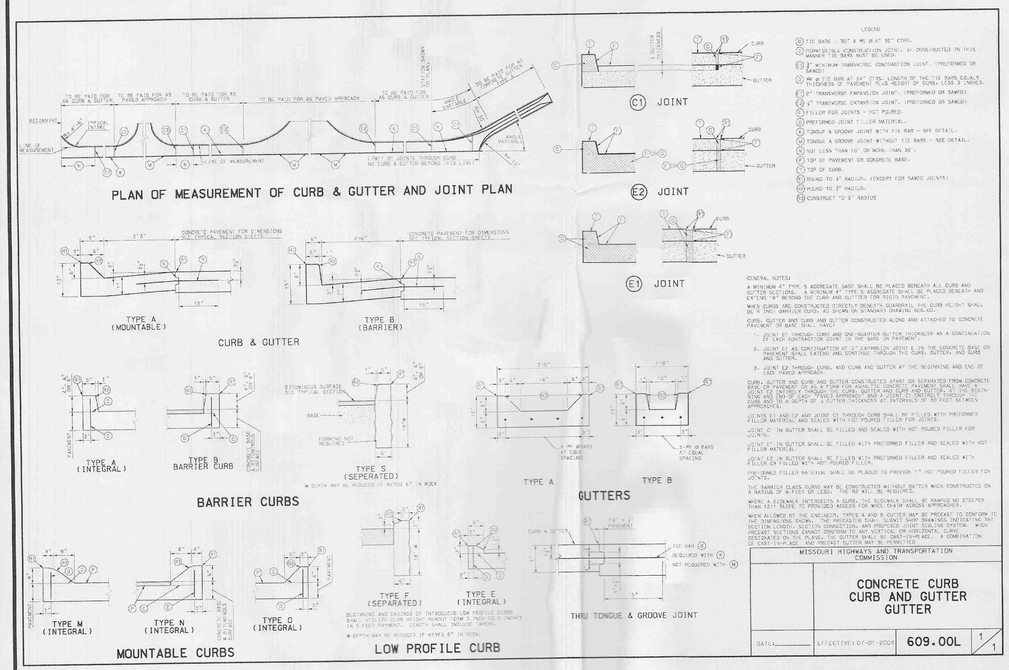

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION			
	CONCRETE CURB CURB AND GUTTER GUTTER		
DATE:	EFFECTIVE: 07-01-2004	609.00L	1/1

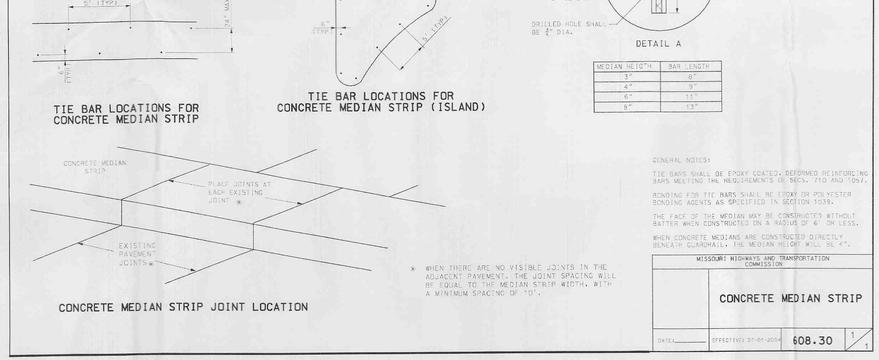

MEDIAN HEIGHT	BAR LENGTH
3"	8"
4"	9"
6"	11"
8"	13"

GENERAL NOTES:

TIE BARS SHALL BE EPOXY COATED, DEFORMED REINFORCING BARS MEETING THE REQUIREMENTS OF SECS. 710 AND 1049.

BONDING FOR TIE BARS SHALL BE EPOXY OR POLYESTER BONDING AGENTS AS SPECIFIED IN SECTION 1039.

THE FACE OF THE MEDIAN MAY BE CONSTRUCTED WITHOUT BATTER WHEN CONSTRUCTED ON A RADIUS OF 6' OR LESS.

WHEN CONCRETE MEDIANS ARE CONSTRUCTED DIRECTLY BENEATH GUARDRAIL, THE MEDIAN HEIGHT WILL BE 4".

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION			
	CONCRETE MEDIAN STRIP		
DATE:	EFFECTIVE: 07-01-2004	608.30	1/1

⚠ 06-16-06 REVISED PER CITY COMMENTS

P&Z NOS: 0106
APPROVED ON 05/04/2006

06-16-06

STATE OF MISSOURI
GEORGE MICHAEL STOCK
NUMBER E-25116
REGISTERED PROFESSIONAL ENGINEER

GEORGE M. STOCK E-25116

MODOT DETAILS

FIFTH THIRD BANK – HIGHWAY K

STOCK & ASSOCIATES
Consulting Engineers, Inc.
257 Chesterfield Business Parkway
St. Louis, MO 63005
PH. (636) 530-9100
FAX (636) 530-9130
e-mail: general@stockassoc.com
Web: www.stockassoc.com

DRAWN BY:	DATE:	CHECKED BY:	DATE:	JOB NUMBER:	SHEET:
J.P.P.	05/08/06	G.M.S.	05/08/06	205-3665.1	C14 of 14