


- REVISIONS:
- 08-16-05 Duckett Comments
 - 08-16-05 PWSD #2 Comments
 - 08-16-05 Fire Department
 - 08-30-05 Per City Comments
 - 09-06-05 PWSD #2 Comments
 - 10-12-05 Per City Comments
 - 10-26-05 Meter Per Client
 - 11-22-05 MoDOT Comments
 - 11-28-05 MoDOT Comments
 - 12-08-05 Fire Department
 - 12-07-05 Per City Comments
 - 12-15-05 Per City Comments

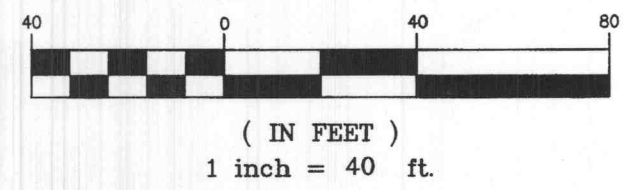

N/F
 DONALD E. STANFILL
 DB. 3739, PG. 1543

CONCRETE BLOCK RETAINING WALL
 (DESIGN BY OTHERS)

TW=576.50
 GRADE=576.00

TW=580.00
 GRADE=579.50

TW=582.20
 GRADE=580.15

TW=584.65
 GRADE=581.15

THE THREE (3) LIGHT STANDARDS ALONG THE RETAINING WALL TO BE PLACED JUST SOUTH OF SAID WALL. LIGHT STANDARD BASE TO EXTEND 6" BELOW THE ADJACENT TOP OF PAVEMENT GRADE OR AS DIRECTED BY THE DESIGNER OF SAID WALL.

10' TO 1' TAPER

BLACK ALUMINUM FENCE ALONG RETAINING WALL WHERE WALL HEIGHT EXCEEDS 4.0 FEET

TW=583.00
 GRADE=578.00

TW=578.50
 GRADE=574.50

TW=573.07
 GRADE=573.07

TECHNOLOGY DRIVE (WIDTH VARIES)

U.S. HIGHWAY 40-61 (WIDTH VARIES)

"KEEP ROADWAY CLEAR OF DIRT, MUD AND OTHER DEBRIS AT ALL TIMES"

UNDERGROUND UTILITIES HAVE BEEN PLOTTED FROM AVAILABLE INFORMATION AND THEREFORE THEIR LOCATIONS SHALL BE CONSIDERED APPROXIMATE ONLY. THE VERIFICATION OF THE LOCATION OF ALL UNDERGROUND UTILITIES, EITHER SHOWN OR NOT SHOWN ON THESE PLANS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, AND SHALL BE LOCATED PRIOR TO ANY GRADING OR CONSTRUCTION OF THE IMPROVEMENTS.