




LIGHT POLE & BASE
 NOT TO SCALE

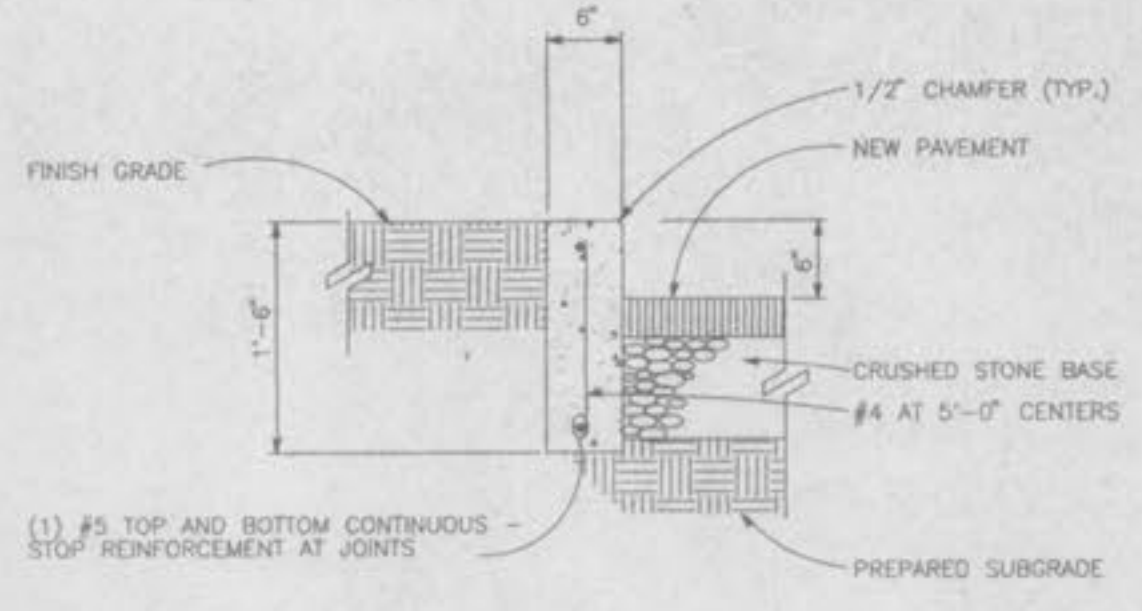



CONCRETE CURB DETAIL
 NOT TO SCALE

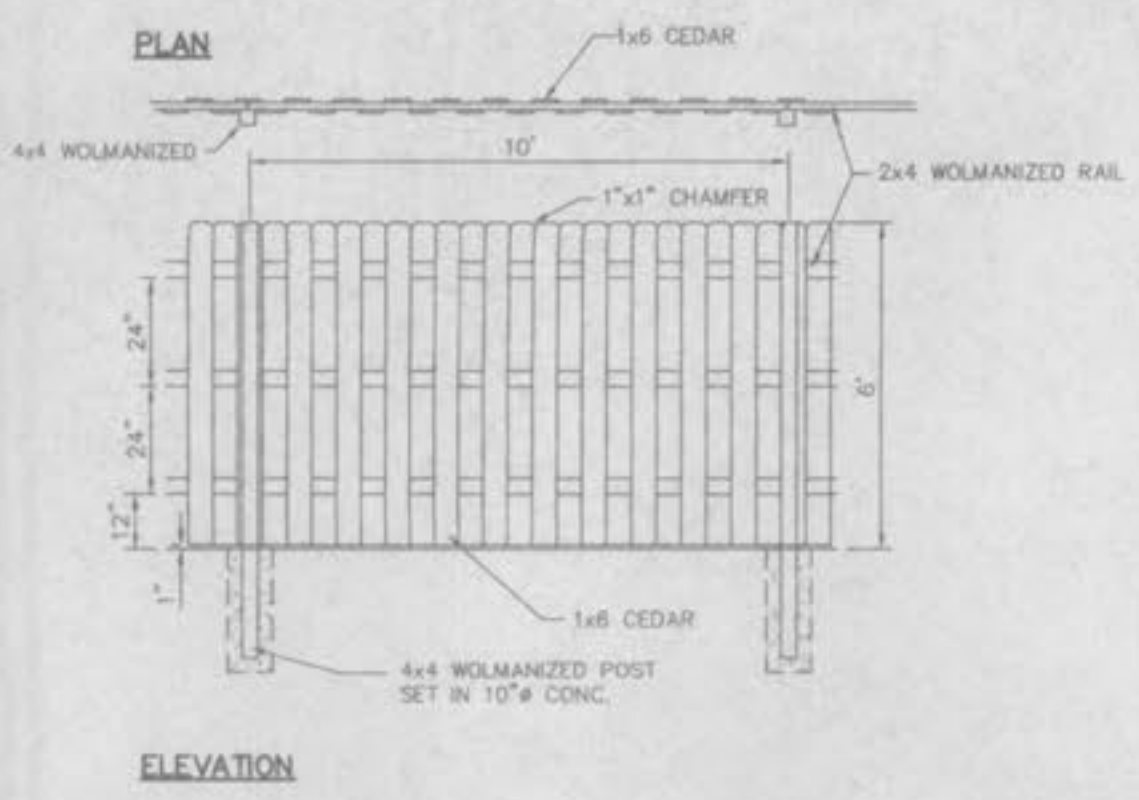


SCREEN FENCE DETAIL
 NOT TO SCALE

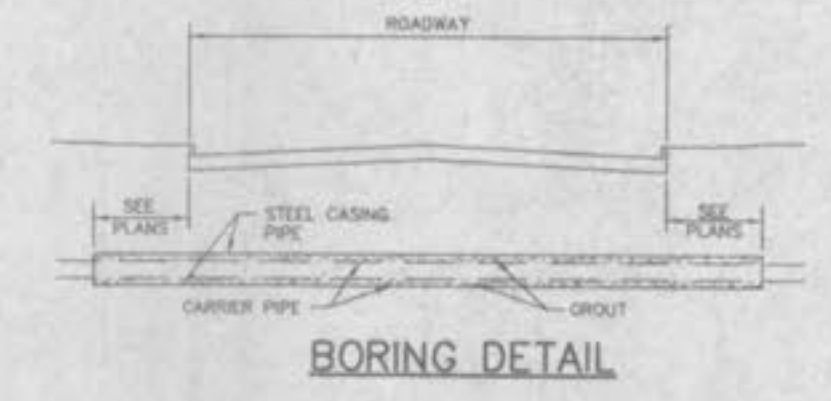


- NOTES:**
- 1.) INSIDE DIAMETER OF CASING PIPE TO BE A MINIMUM OF 4" GREATER THAN COUPLING DIAMETER OF CARRIER PIPE.
 - 2.) ENCASEMENTS TO BE INSTALLED UNDER THE ROAD BY MEANS OF JACKING IT THROUGH, OR BY DRY-BORING A HOLE THAT WILL RECEIVE THE CASING WITH A DRUG FIT.
 - 3.) THE OUTSIDE DIAMETER OF THE CASING SHALL NOT BE LESS THAN NOR MORE THAN ONE INCH GREATER THAN THE BORED HOLE.
 - 4.) THE ANNULAR SPACE BETWEEN THE CASING PIPE AND THE BORED HOLE SHALL BE FILLED WITH GROUT.

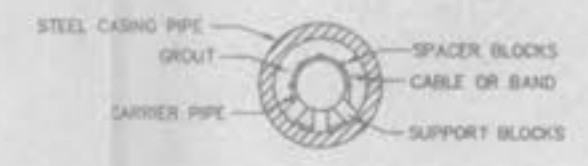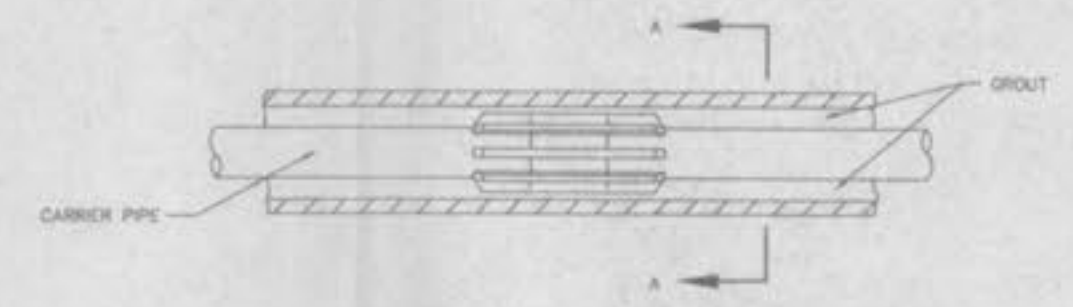

SECTION A - A

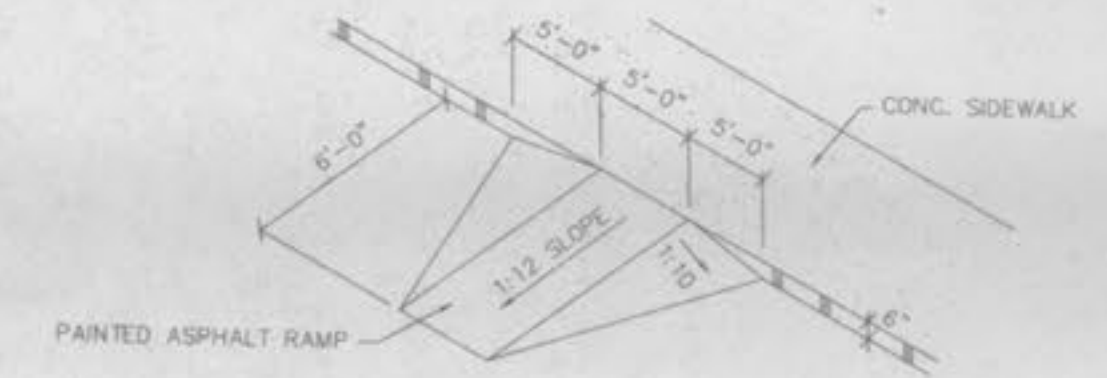

HANDICAPPED RAMP DETAIL
 NOT TO SCALE

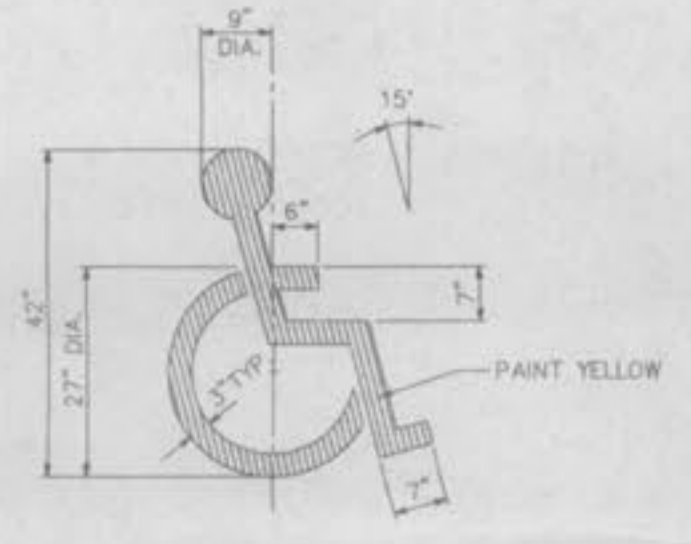

PAINTED HANDICAPPED PARKING SYMBOL
 NOT TO SCALE




12" X 18" SIGN
 STANDARD SIGN FACE, STANDARD HIGHWAY DEPARTMENT, OR CITY STREET DEPARTMENT GAUGE, BLACK OR BLUE LETTERING, GALVANIZED STEEL POST 9'-6" LONG, SET 3'-0" INTO GRADE, SET BOTTOM OF SIGN 5'-0" ABOVE FINISHED GRADE

HANDICAP PARKING SIGN
 NOT TO SCALE



BUILDING MOUNTED LIGHT
 NOT TO SCALE

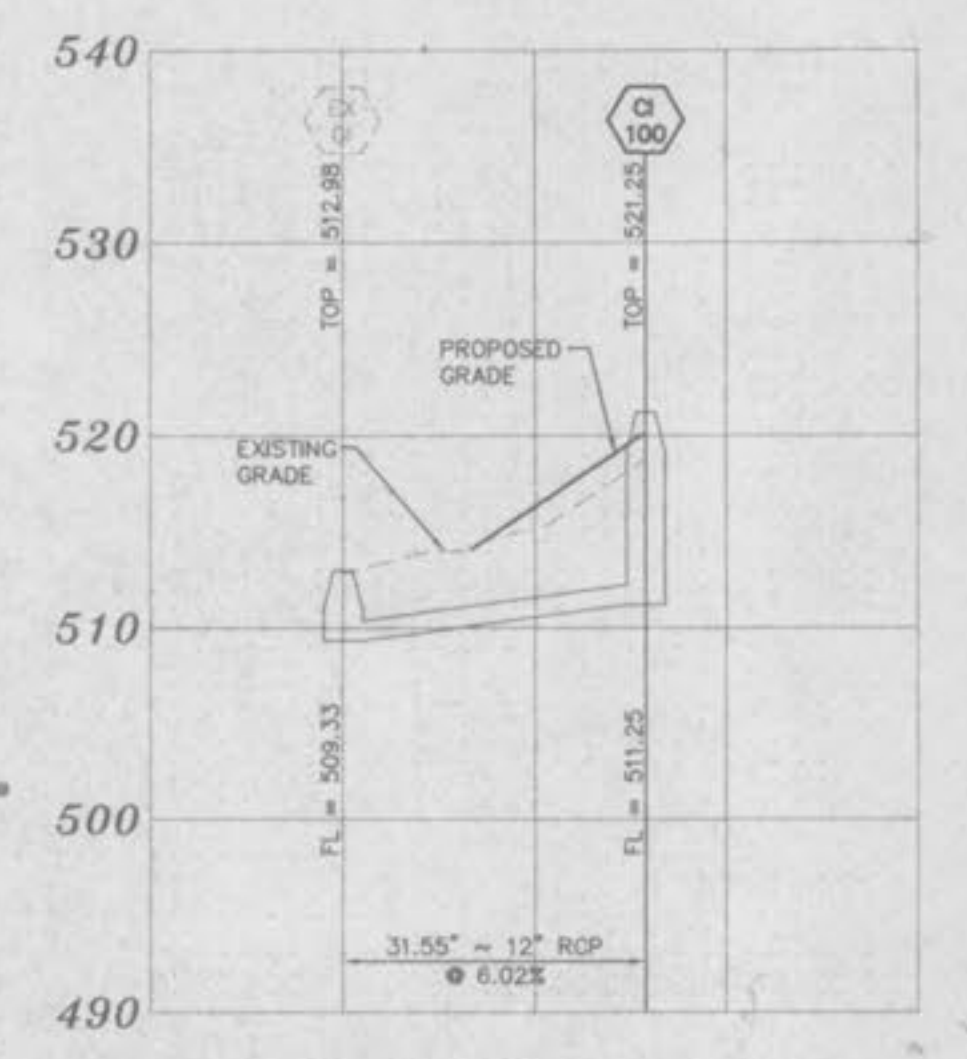

STORM SEWER PROFILE
 SCALE: 1" = 20' H.
 1" = 10' V.

\\sawtooth-drive\06031-5850\67702201.dwg, 10/2/98, 12:40:36, 34, 1999, \$1441.00, 34, 44, 4