


CPM's LITE+PRO V3.00 Point-By-Point Numeric Output - 11:22 1-Mar-1
 PROJECT: COMMBANK AREA PROJECT-WIDE GRID-N/A
 VALUES ARE FC, SCALE: 1 IN= 1.0FT, HORZ GRID (N), HORZ CALC, Z= 0.0

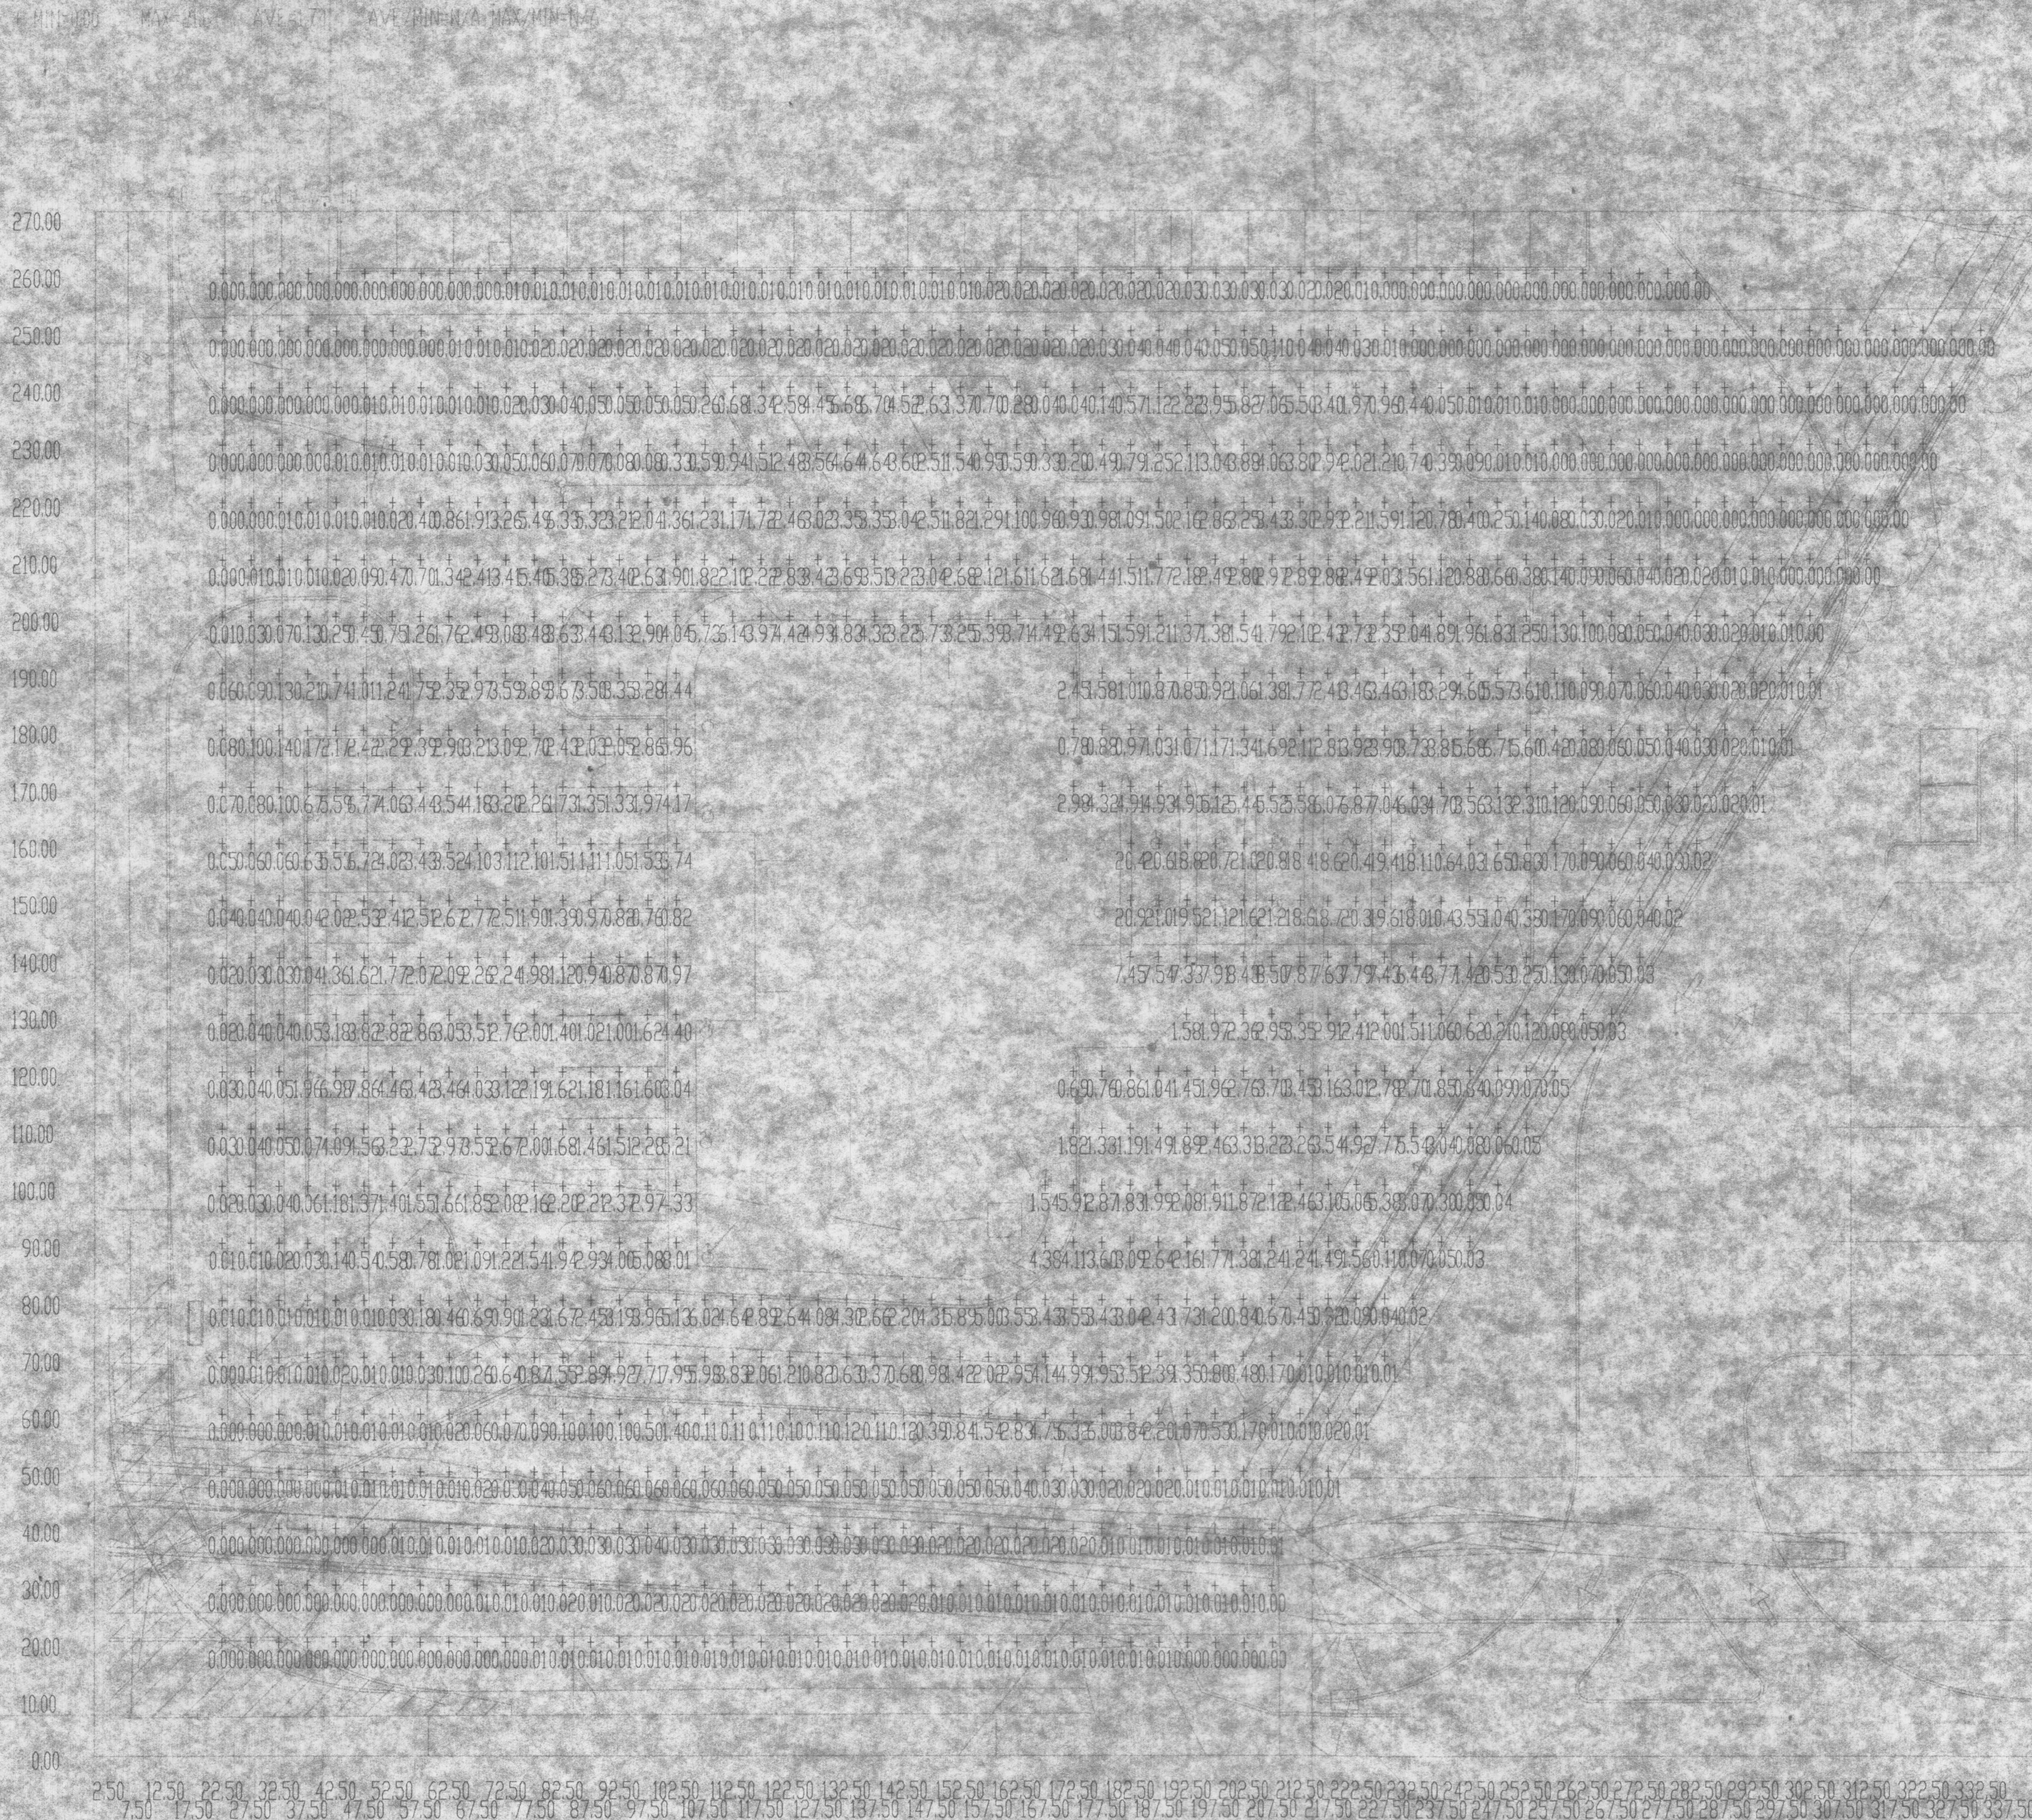

| CALCULATION SUMMARY | | | | | |
|---------------------|------------|-----------|---------|-----|-----|
| AREA NAME | DIMENSIONS | GRID NAME | AVE (+) | MAX | MIN |
| SITE PLAN/LIG | 342x271ft | grade | 17 | 216 | 0.0 |

| LUMINAIRE SCHEDULE | | | | | | | |
|--------------------|--------|---|--------------------|--------|----------------------|------|-----|
| TYP | SYMBOL | DESCRIPTION | LAMP | LUMENS | MOUNTING/BALLAST | LLF | QTY |
| R | | SPACULUNG SPUG LNI-M400P (1) 7' LNI-M320PS-IV | (1) MH320W/ED37/PS | 29700 | 20' RSP A/B | 0.70 | 9 |
| T | | KIM KIM VRBI-100MH (1) 6' VRBI-100MH | (1) M100/U | 7800 | 42" BULLARD A/B | 0.65 | 12 |
| V | | PRESCOTTIE PRESCOTTIE 175W (1) 4' 139IM9-175MFE-M8 | (1) M-175/C/U--HOR | 12000 | CANOPY MOUNT NONE | 0.48 | 12 |

9 Sunnyside Drive, Suite 110
 St. Louis, Missouri 63143
 Fax: 314.646.0100
 Telephone 314.646.0400

Date: 04-19-2001
 Contact: J.H.
 Produced By:
 Reviewed By:
 Revisions:

MEP ENGINEERS
 MEP Engineers, Inc.
 10777 Sunset Office Drive
 Corporate Suite 100
 St. Louis, Mo. 63127
 Phone: 314.966.0100
 Fax: 314.966.1010

Construction Documents For:
COMMERCE BANK
 Outlot #5 Deer Creek Crossing
 O'Fallon, Missouri

