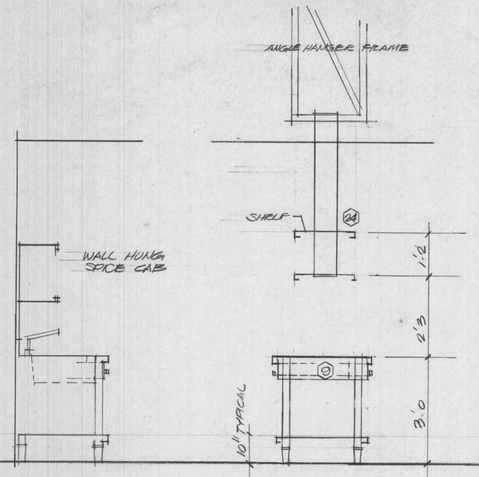

② COOKS TABLE
W/ SPICE CAB

④ WORK TABLE / POT RACK

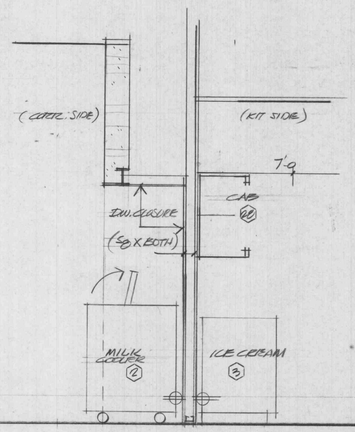

③ MILK COOLER RECESS



⑬ POT SINK

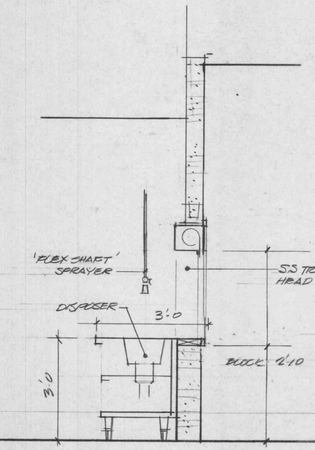

⑦ DISH RETURN
1/2"=1'-0

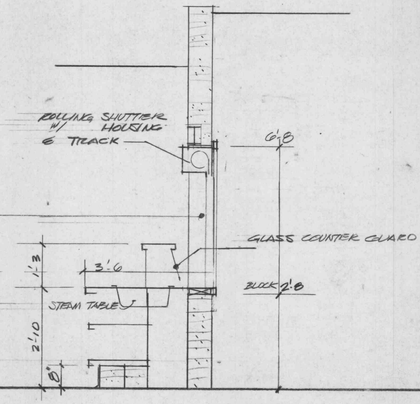

① SERVING COUNTER
1/2"=1'-0

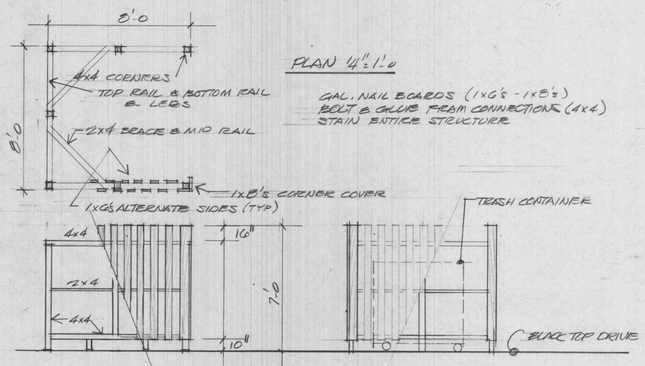

PLAN 1/4"=1'-0

GAL. NAIL BOARDS (1x6's - 1x8's)
BOLT & GLUE FRAM CONNECTIONS (4x4)
STAIN ENTIRE STRUCTURE

SCREEN - TRASH CONTAINER
(MOVEABLE) 1/4"=1'-0

EQUIPMENT

DETAIL	NO.	QUANTITY	ITEM	REMARKS	NOTES
①	1	1	SERVING COUNTER		
②	2	1	MILK COOLER	50 x 31 x 40"h	
	3	1	ICE CREAM COOLER	40 x 28 x 37 h	
	4	1	DISPOSER (SINK)	W/ SPRAYER	
	5	1	DISHWASHER	W/ CANOPY	
	6	1	BOOSTER HEATER		
⑦	7	1	DISH TABLES	(AROUND CORNER)	
	8	20" LGT	MTL SHELVING	STOR. (5 SHELF)	
⑨	9	1	WORK TABLE	SHLF, BELOW	3 DRAWERS
	10	1	SLICER		
	11	1	WALK IN FREEZ.	8'x7'x7'0 (-10°)	+ RECESS SLAB - (SHELF)
	12	20" LGT	MTL SHELVING	(FREEZER)	
⑬	13	1	POT SINK (3 BOWL)	EA 20 x 20	1 DRAWER
	14	1	GREASE TRAP	SURFACE MOUNT	(BY CAT. K CONTR)
	15	1	MIXER	30 QT	
	16	1	STEAM KETTLE	(40 GAL TILT)	
	17	1	CONVECTION OVEN	(DOUBLE STACK)	
	18	2	DEEP FRYERS		
	19	1	6 BURNER RANGE	W/ OVEN	
	20	1	SPICE CAB.	WALL HUNG	
㉑	21	1	COOKS TABLE	(CAB ABOVE)	2 DRAWER W/ CHAMFER CORNER
	22	1	HOOD	W/ FIRE SUPPRESSION	(CAT. "J" CONTR)
	23	1	TABLE	(FOR FRIES MACHINE)	
	24	1	POT SHELF - 2 EA.	(CEIL HUNG)	
	25	1	DISPOSER		
	26	1	PREP. TABLE		2 DRAWER W/ CHAMFER CORNER
	27	1	BACK BAR	SH. ABOVE - CAB BELOW (SLIDE DOORS)	
	28	1	CAB.	ABOVE ③	
	29	1	REFRIGERATOR		

NOTE: WHEELED CARTS & RACKS NOT IN CONTRACT

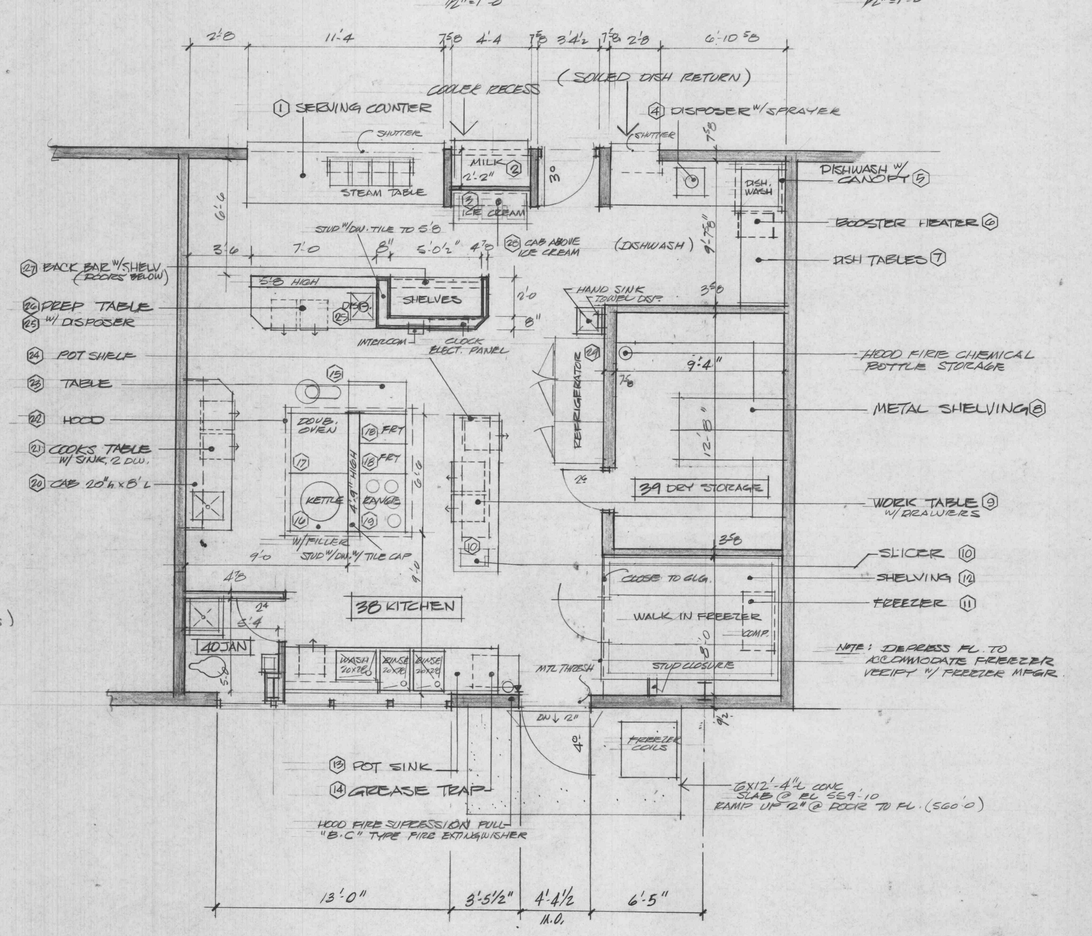

PICKETT RAY & SILVER	civil engineers
SOIL CONSULTANTS INC	soil engineers
L. WEINTRAUB & ASSOC	structural engineers
THOMAS BERKELEY	mechanical engineers

STATE OF MISSOURI · E. MAHLON PLUTH · NUMBER A-2509 · REGISTERED ARCHITECT

the DMA corporation
Design & Management Associates
314-946-2060 202 Transit Street St. Charles, Mo. 63301

NEW ELEMENTARY SCHOOL
ft. zumwalt school district
o'fallon missouri

KITCHEN PLAN EQUIPMENT DETAILS

Revisions:

Job No. 602108

K1

Date: 1-7-86

Copyright DMA Corporation