



THE ENCLAVE AT  
**WINGHAVEN**<sup>TM</sup>  
APARTMENTS

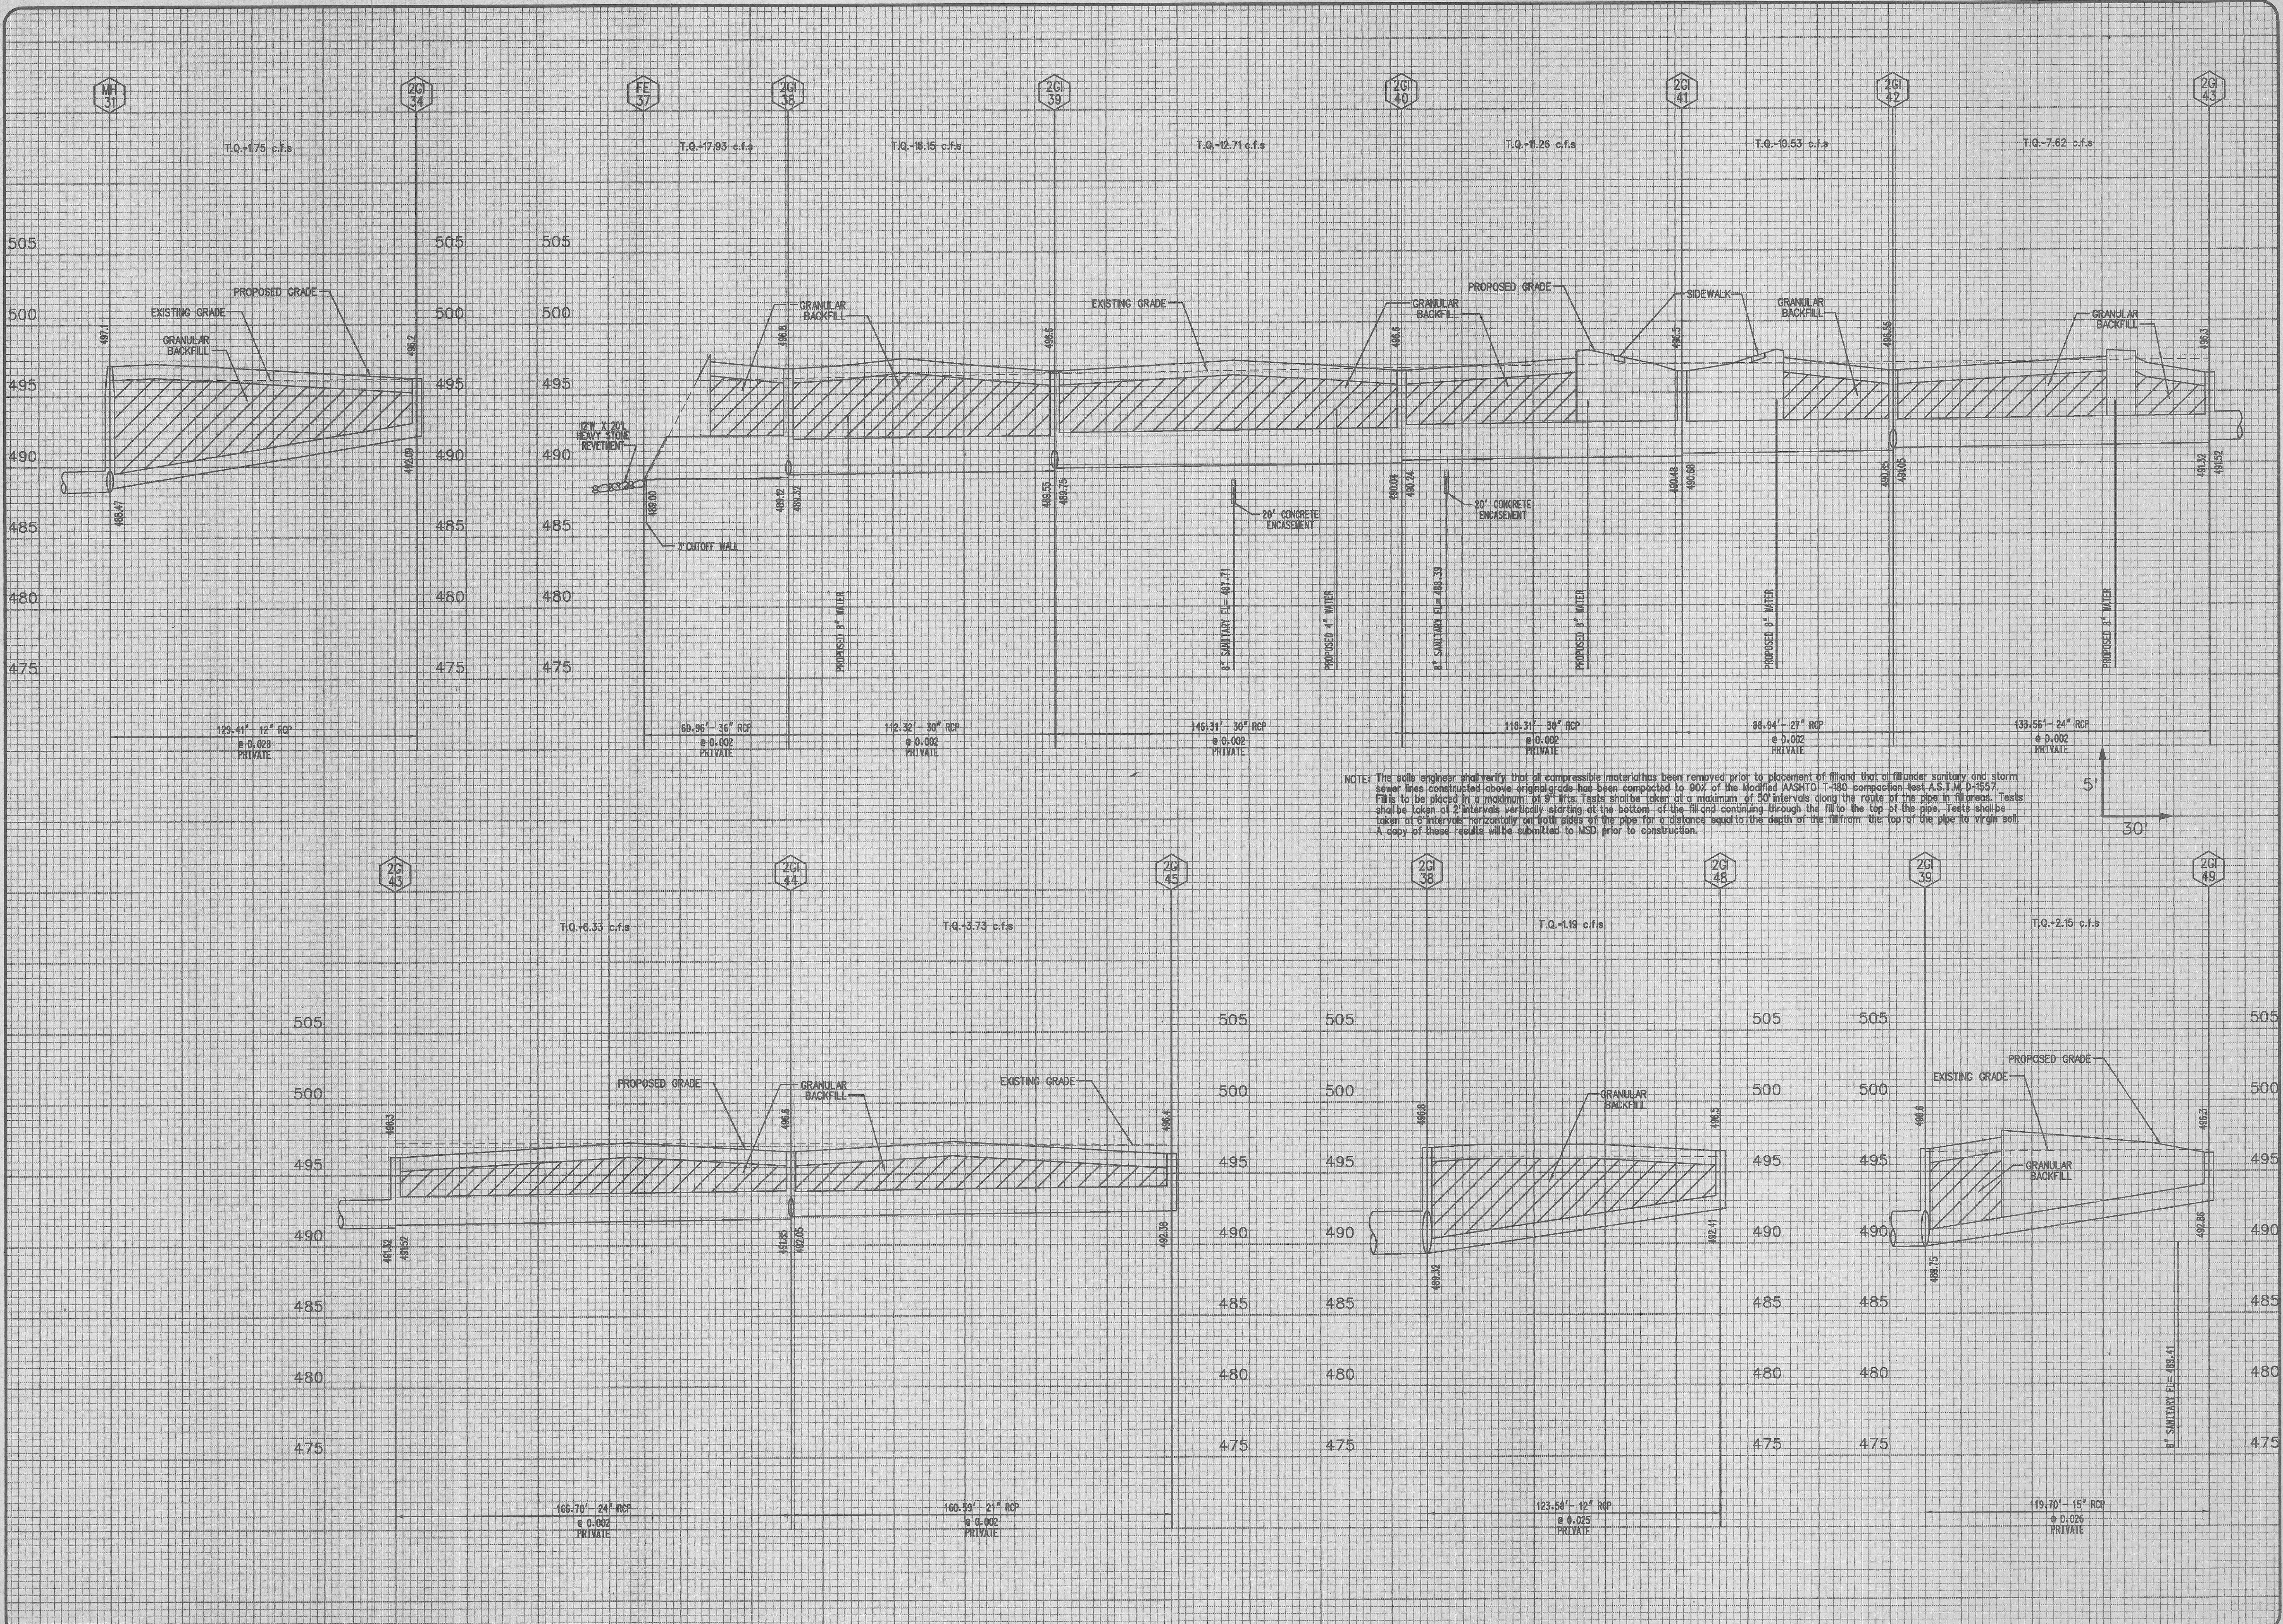

NOTE: The soils engineer shall verify that all compressible material has been removed prior to placement of fill and that all fill under sanitary and storm sewer lines constructed above original grade has been compacted to 90% of the Modified AASHTO T-99 compaction test A.S.T.M. D-1557. Fills to be placed in a maximum of 9" lifts. Tests shall be taken at a maximum of 50' intervals along the route of the pipe in fill areas. Tests shall be taken at 2' intervals vertically starting at the bottom of the fill and continuing through the fill to the top of the pipe. Tests shall be taken at 6' intervals horizontally on both sides of the pipe for a distance equal to the depth of the fill from the top of the pipe to virgin soil. A copy of these results will be submitted to MSD prior to construction.



STORM PROFILES  
Design By: D.A.L.  
Drawn By: J.L.F.  
Checked By: T.J.M.  
B-5948