


SEE SHEET 2



**NOTE:**  
 Siltation Berms, Silt Fence (or Straw Bales) and Diversion Swales shall be maintained through grading period.  
 Temporary Diversion Swales shall be constructed as shown on plans. Additional Diversion Swales may be required to insure proper drainage to temporary Sediment Basins.  
 See sheet 4 of 4 for Construction Details.

- S-1** 4.0 Acres x 1,800 cuft./Acre = 7,200 cuft.  
Storage Area - 130' x 30' x 2' = 7,800 cuft.
- S-2** 3.4 Acres x 1,800 cuft./Acre = 6,120 cuft.  
Storage Area - 120' x 30' x 2' = 7,200 cuft.
- S-3** 2.9 Acres x 1,800 cuft./Acre = 5,220 cuft.  
Storage Area - 100' x 30' x 2' = 6,000 cuft.
- S-4** 2.5 Acres x 1,800 cuft./Acre = 4,500 cuft.  
Storage Area - 100' x 25' x 2' = 5,000 cuft.
- S-5** 1.4 Acres x 1,800 cuft./Acre = 2,520 cuft.  
Storage Area - 50' x 30' x 2' = 3,000 cuft.
- S-6** 3.5 Acres x 1,800 cuft./Acre = 6,300 cuft.  
Storage Area - 120' x 30' x 2' = 7,200 cuft.

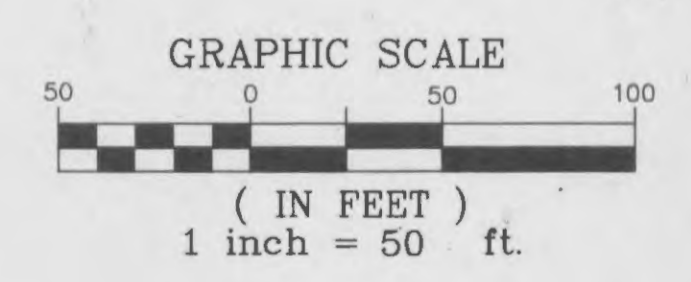

**UTILITY NOTE:**  
 UNDERGROUND FACILITY STRUCTURES AND UTILITIES HAVE BEEN PLOTTED FROM AVAILABLE SURVEYS AND RECORDED INFORMATION AND, THEREFORE, THEIR LOCATIONS MUST BE CONSIDERED APPROXIMATE ONLY. VERIFICATION OF LOCATION OF ALL UNDERGROUND STRUCTURES AND UTILITIES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

**FIELDSTONE FARMS ADDITION  
 ROUGH GRADING PLAN**  
 February 1998  
 JOB # 95-131A  
 REV 3/15/98 By City of Fallon RDL