# NEW LIFE CHURCH
## PROFILES//DETAILS

## STORM SEWER PROFILE

PROFILE: HORIZONTAL 20 SCALE
VERTICAL 10 SCALE

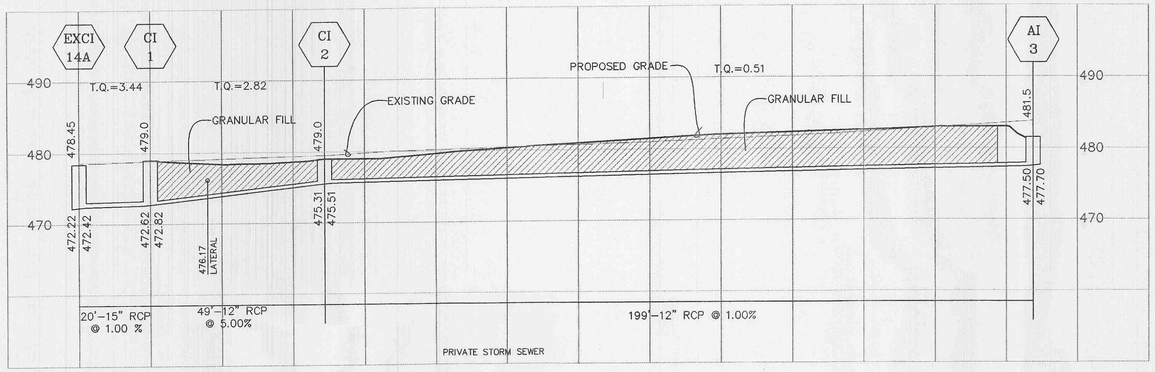


MARKING ON STORM SEWER INLETS:
ACP INTERNATIONAL STORM MARKER SD-W-CC "NO DUMPING-DRAINS TO WATERWAYS"
3 7/8" DIAMETER
EPOXY ADHESIVE TO ADHERE TO INLET
STYLE=CRYSTAL CAP

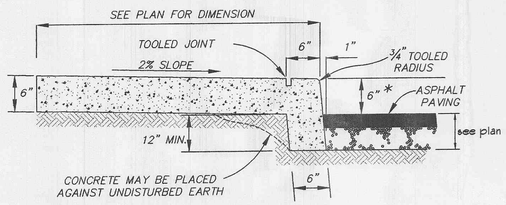


*6" UNLESS INDICATED OTHERWISE ON GRADING PLAN

INTEGRAL CONCRETE CURB & SIDEWALK

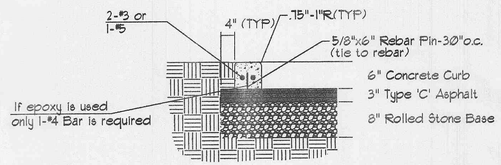


Curb Detail

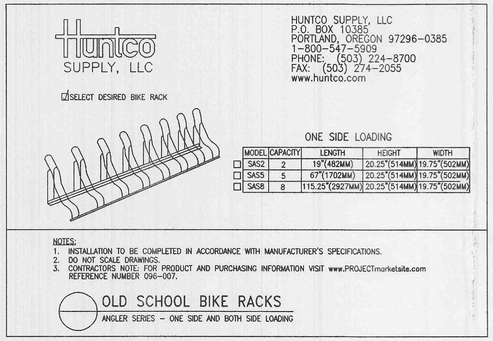


| MODEL | CAPACITY | LENGTH | HEIGHT | WIDTH |
|---|---|---|---|---|
| SAS2 | 2 | 19"(482MM) | 20.25"(514MM) | 19.75"(502MM) |
| SAS5 | 5 | 67"(1702MM) | 20.25"(514MM) | 19.75"(502MM) |
| SASB | 8 | 115.25"(2927MM) | 20.25"(514MM) | 19.75"(502MM) |

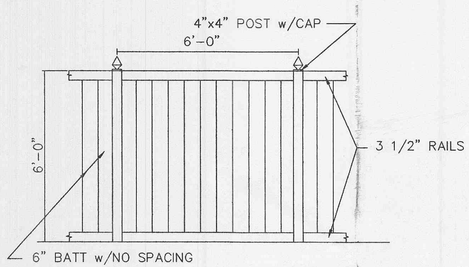


VINYL PRIVACY FENCE

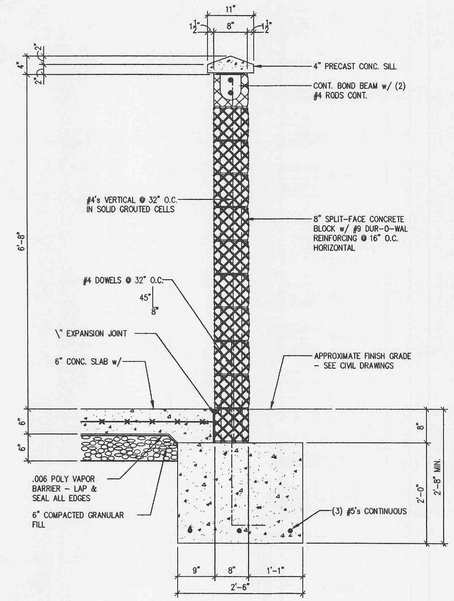


3 WALL SECTION
SCALE: 3/4" = 1'-0"

### VEGETATIVE ESTABLISHMENT FOR URBAN DEVELOPMENT SITES

APPENDIX A

SEEDING RATES:

Permanent:

Tall Fescue - 30 lbs./ac.
Smooth Brome - 20 lbs./ac.
Combined Fescue@15 lbs./ac. and Brome@10 lbs./ac.

Temporary:

Wheat or Rye - 150 lbs./ac.(3.5 lbs. per 1000 sq. ft.)
Oats 120 lbs./ac.(2.75 lbs. per 1000 sq. ft.)

SEEDING PERIODS

Fescue or Brome March 1 to June 1
August 1 to October 1
Wheat or Rye March 15 to November 1
Oats March 15 to September 15

MULCH RATES: 100 lbs. per 1000 sq.ft.(4,356 lbs. per acre)

FERTILIZER RATES: Nitrogen 30 lbs./ac.
Phosphate 30 lbs./ac.
Potassium 30 lbs./ac.
Lime 600 lbs./ac. ENM*

*ENM = effective neutralizing material as per State evaluation of quarried rock.

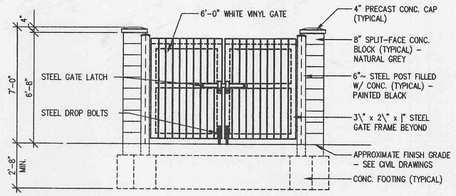


2 TRASH ENCLOSURE ELEVATION
SCALE: 1/4" = 1'-0"

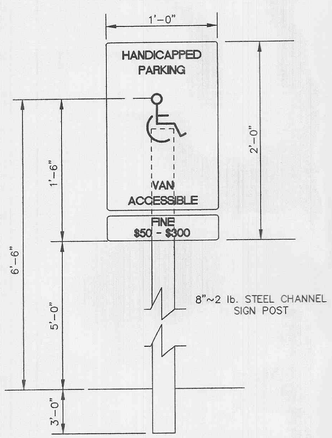


-PROVIDE ONE SIGN PER HANDICAPPED SPACE.
-NO STEPS AT BUILDING ENTRANCES.
-PROVIDE RAMPS OR DROP CURBS AT HANDICAPPED SPACES.
-PROVIDE 60"X 60" AREA OUTSIDE ENTRANCE FOR WHEELCHAIR MANUEVERABILITY.

HANDICAPPED PARKING SIGN

## TRUNCATED DOMES FOR HANDICAPPED RAMPS

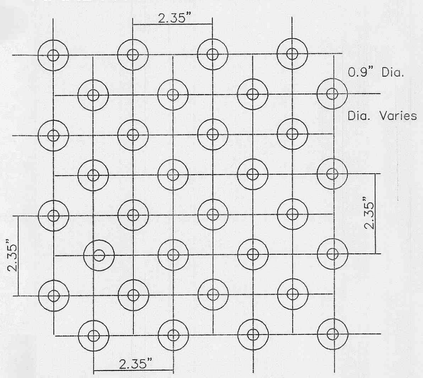


**Detectable Warning: Pattern**




**Detectable Warning: Section**

Detectable Warnings to be stamped into concrete using Symons Color Hardener in Brick Red" or equal.

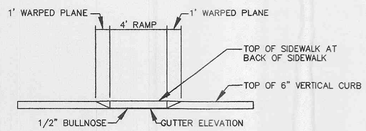


SECTION A-A
N.T.S.

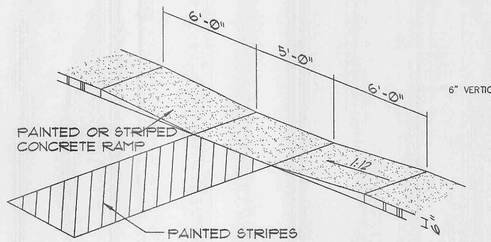


HANDICAPPED RAMP DETAIL
NOT TO SCALE

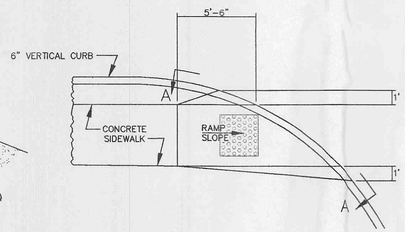


HANDICAP RAMP
N.T.S.

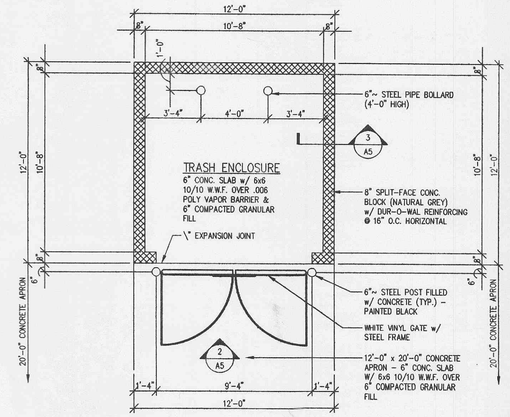


1 TRASH ENCLOSURE PLAN
SCALE: 1/4" = 1'-0"