




HANDICAPPED PARKING MARKING
N.T.S.

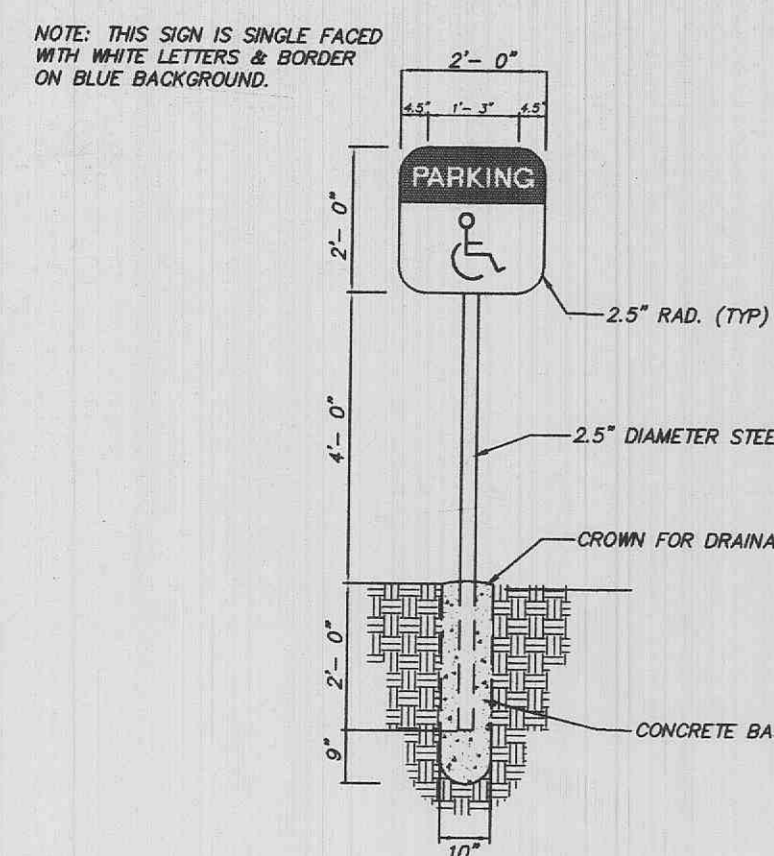


HANDICAPPED SIGN DETAIL
N.T.S.

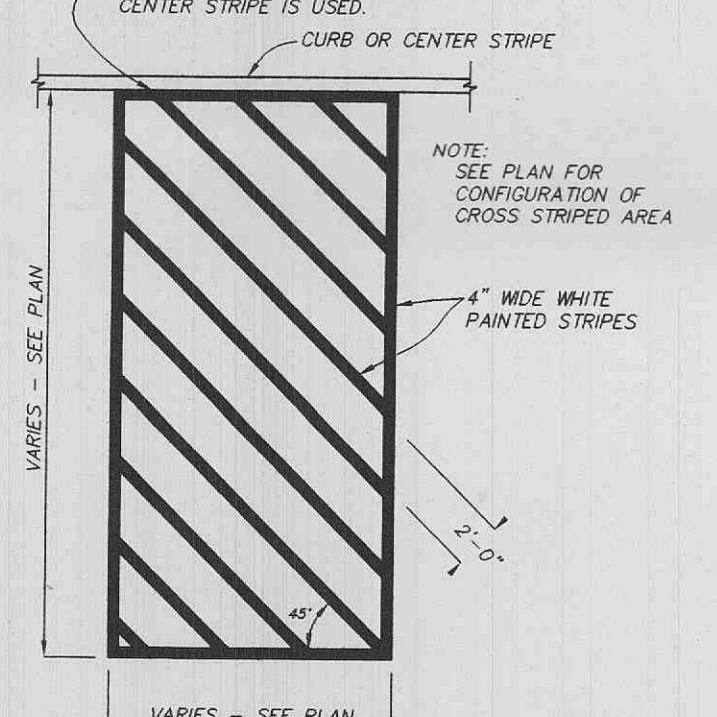


CROSS STRIPING DETAIL
N.T.S.

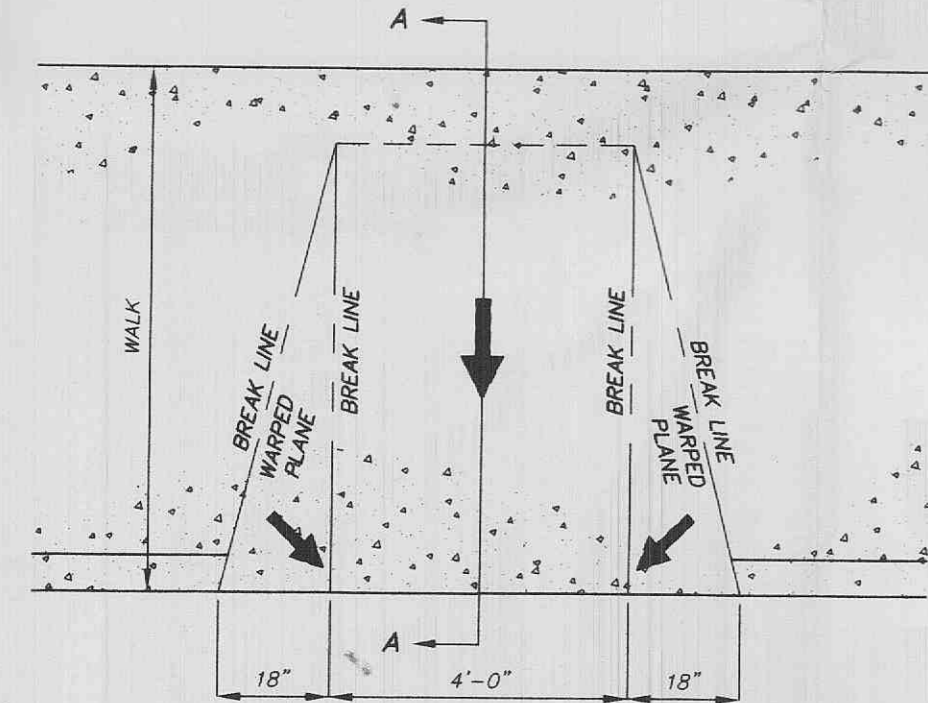


CURVED CURB HANDICAPPED RAMP DETAIL
N.T.S.

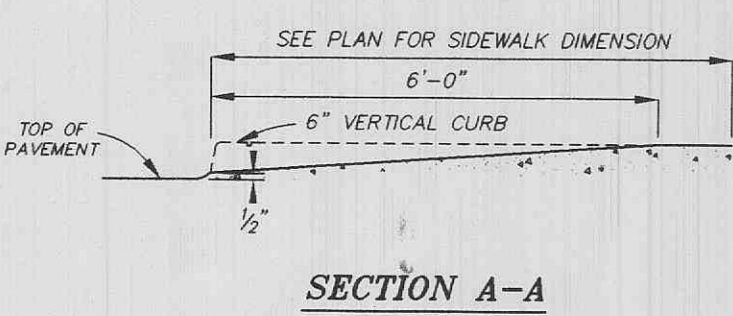


STRAIGHT CURB HANDICAPPED RAMP DETAIL
N.T.S.

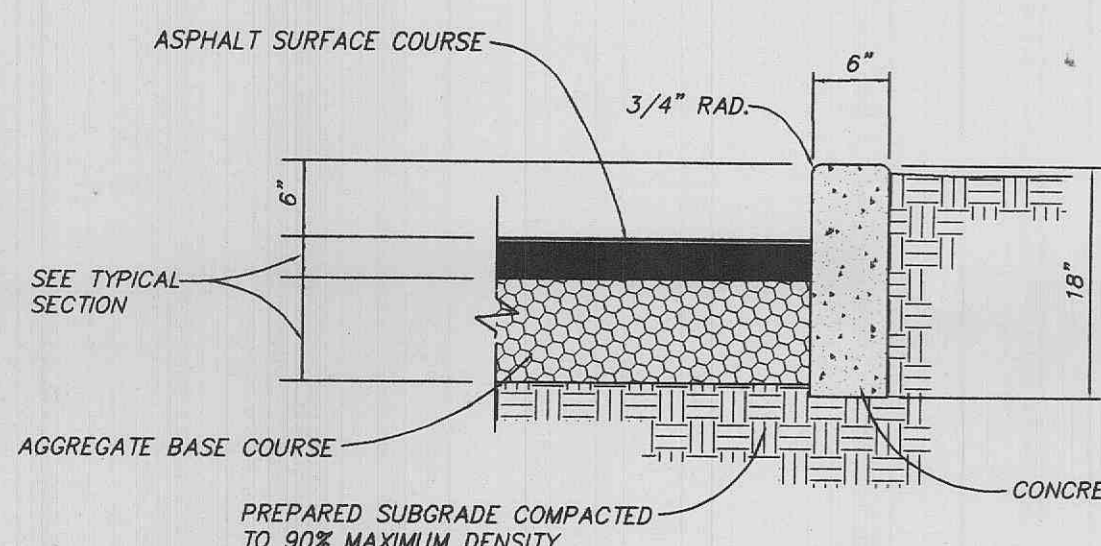


6" VERTICAL CONCRETE CURB
N.T.S.

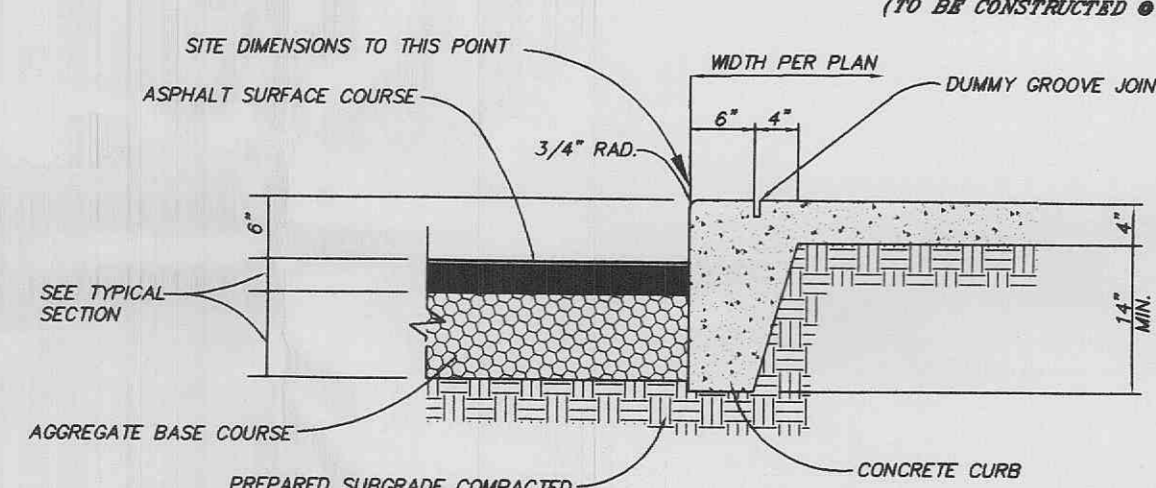


6" CONCRETE CURB WITH SIDEWALK
N.T.S.

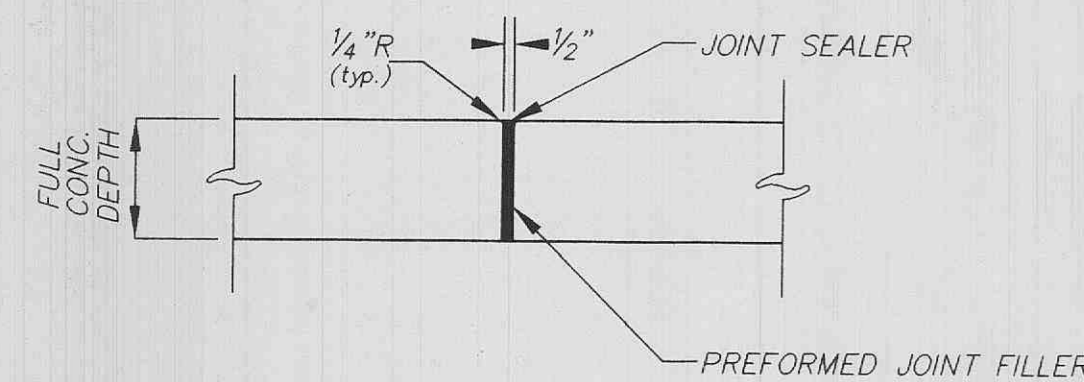

CURB AND SIDEWALK EXPANSION JOINT
AT P.T. & P.C. POINTS OF ROUNDINGS AND AT INTERVALS NOT EXCEED 30'
(SEE SIDEWALK DETAIL)
N.T.S.

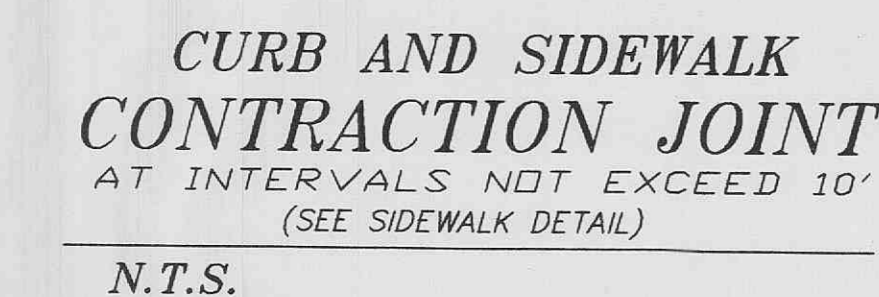


CURB AND SIDEWALK CONTRACTION JOINT
AT INTERVALS NOT EXCEED 10'
(SEE SIDEWALK DETAIL)
N.T.S.

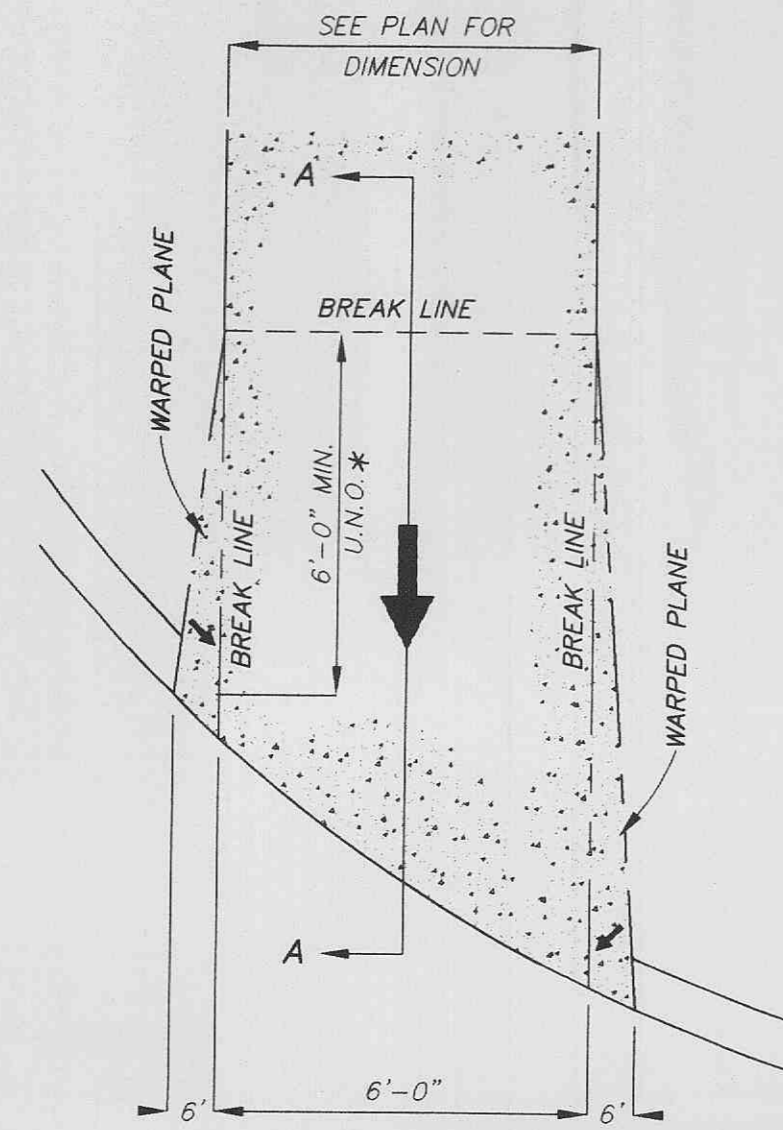


STAKED BALE DETAIL
N.T.S.

Siltation Control

Siltation control shall consist of temporary berms and walls to divert storm water run-off to a natural discharge point. (See Bleeding Plan for locations) At which point there shall be a double row of straw bales with four feet of separation between bales and straw bales shall be stopped. In areas where a berm and swales are not feasible, a single row of straw bales shall be placed end to end to protect adjacent property and right-of-way (this shall be the responsibility of the grading contractor or developer if so agreed). Upon completion of storm sewers, straw bales shall be placed on all sides of appropriate structures to keep dirt out of storm sewer (this shall be the responsibility of the sewer contractor or the developer if so agreed). All straw bales shall be securely anchored and properly maintained until all disturbed areas are planted or re-vegetation established.

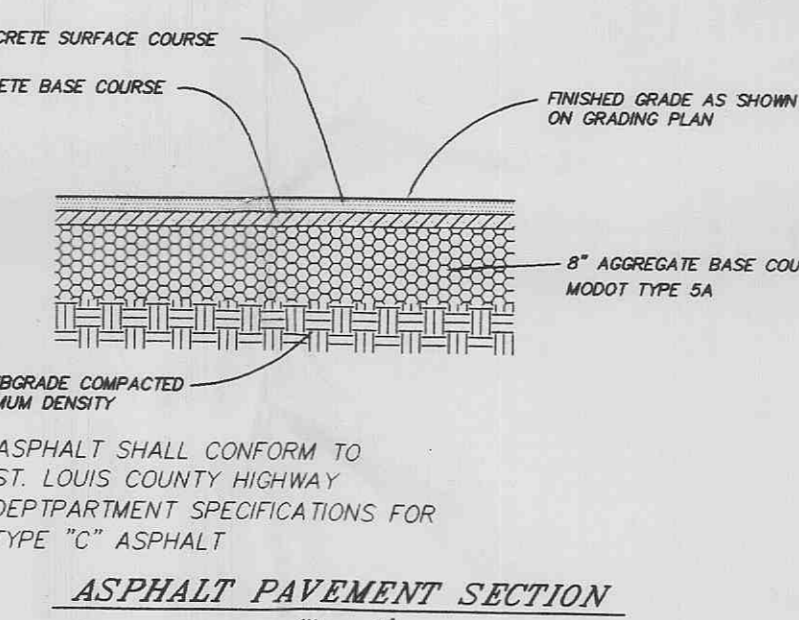


ASPHALT PAVEMENT SECTION
N.T.S.

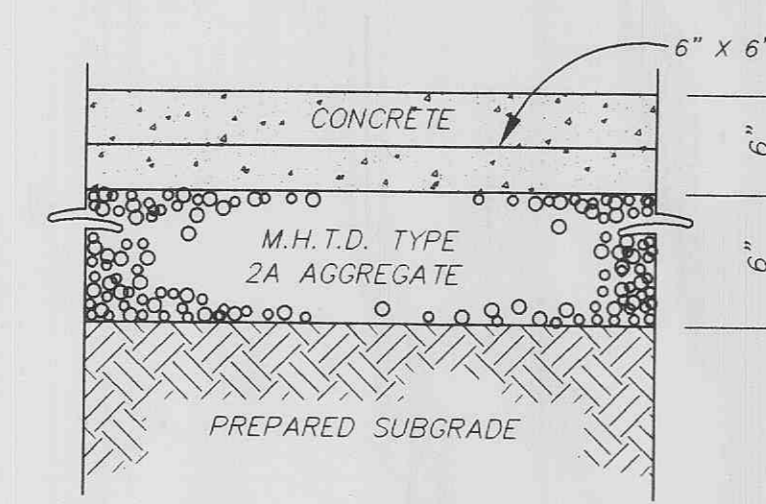

CONCRETE PAVEMENT SECTION
N.T.S.

CONC. SHALL BE 3,000 PSI (MIN. COMPRESSIVE) @ 28 DAYS.
AIR CONTENT SHALL BE 4% - 8%
SLUMP SHALL BE 3" - 7"
TEMPERATURE SHALL BE 50° - 90°.

STORM SEWER PROFILES

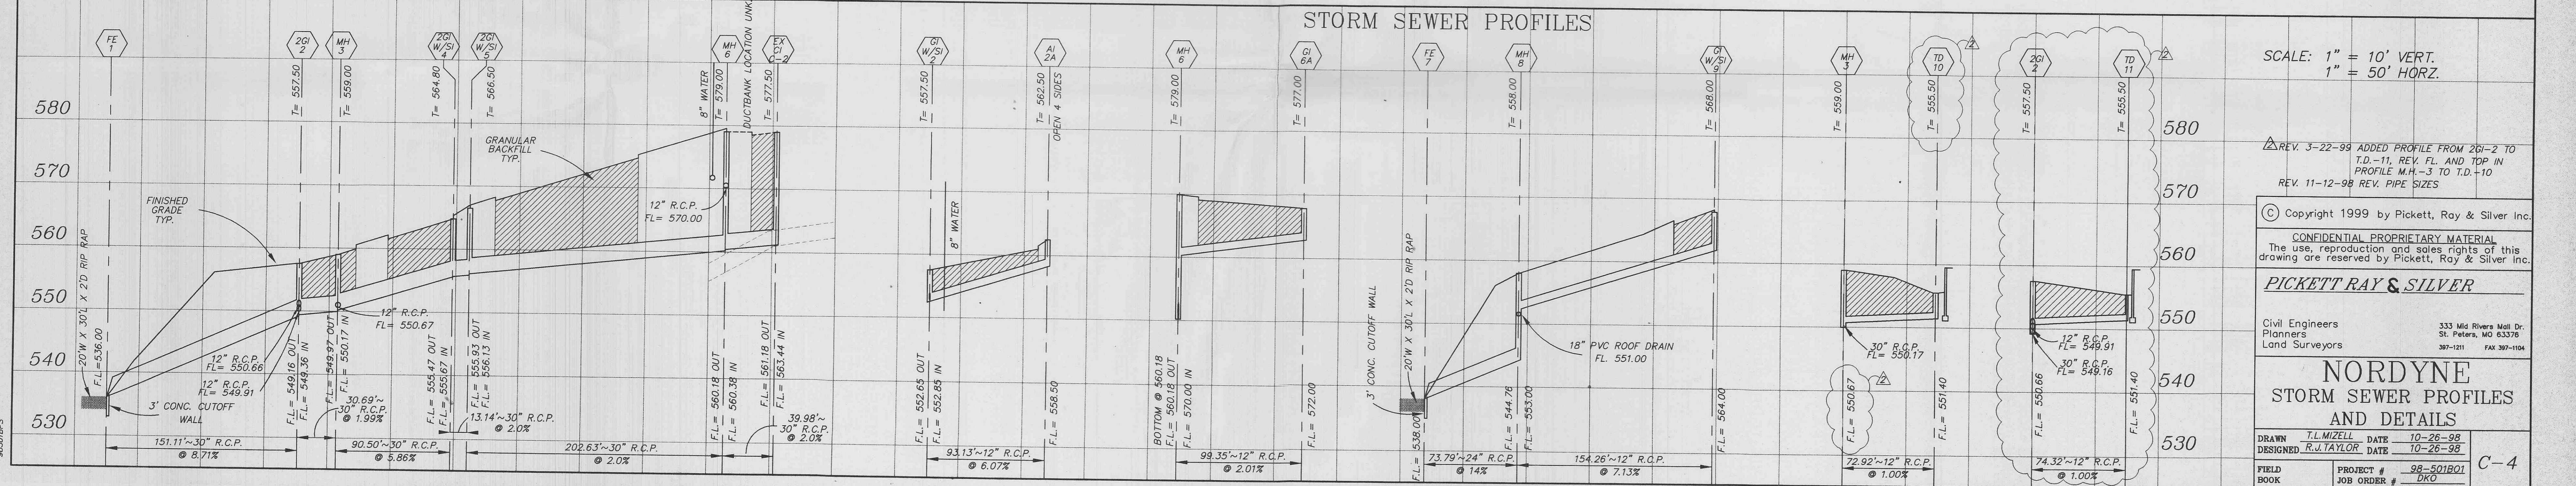

SCALE: 1" = 10' VERT.
1" = 50' HORZ.

REV. 3-22-99 ADDED PROFILE FROM 201-2 TO T.D.-11, REV. FL. AND TOP IN PROFILE M.H.-3 TO T.D.-10
REV. 11-12-98 REV. PIPE SIZES

© Copyright 1999 by Pickett, Ray & Silver Inc.
CONFIDENTIAL PROPRIETARY MATERIAL
The use, reproduction and sales rights of this drawing are reserved by Pickett, Ray & Silver Inc.
PICKETT RAY & SILVER
Civil Engineers
Planners
Land Surveyors
333 Mid Rivers Mall Dr.
St. Peters, MO 63376
387-1211 FAX 387-1044
NORDYNE
STORM SEWER PROFILES
AND DETAILS
DRAWN T.L.MZELL DATE 10-26-98
DESIGNED R.J.TAYLOR DATE 10-26-98
FIELD BOOK PROJECT # 98-501801
JOB ORDER # DKO