

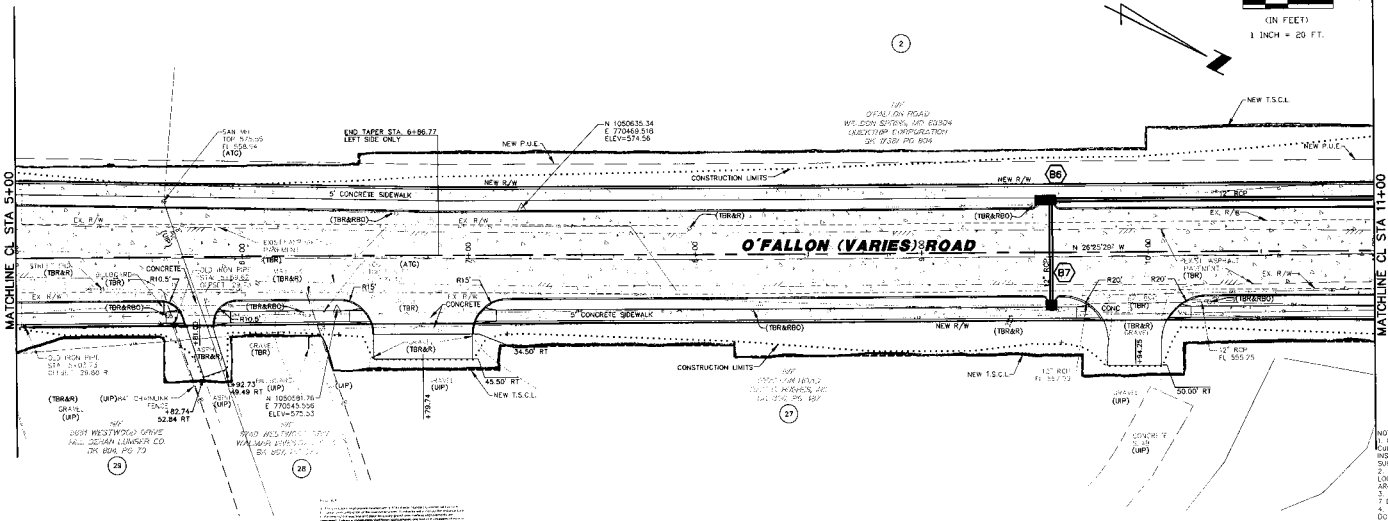


GRAPHIC SCALE



- NOTES:
1. REMOVE TEMP DRIVEWAY CURBSETS BEFORE INSTALLING NEW DRIVEWAY SURFACES.
  2. FIELD ADJUST SIDEWALK LOCATION TO TRANSITION AROUND NEW UTILITY POLES 3' LIMIT HORIZONTAL CURVE TO 7 DAYS MAXIMUM.
  3. INSTALL FRANGIBLE DOWNES ON ALL HANDICAP RAMPES.

HIGH POINT ELEV = 574.28  
 HIGH POINT STA = 3+47.31  
 PVI STA = 6+19.50  
 PVI ELEV = 579.67  
 A.O. = -8.78  
 N = +0.36  
 S.S.D. = 361'  
 530.00' VC  
 S-BACK = +3.20%  
 S-FORWARD = -5.08%

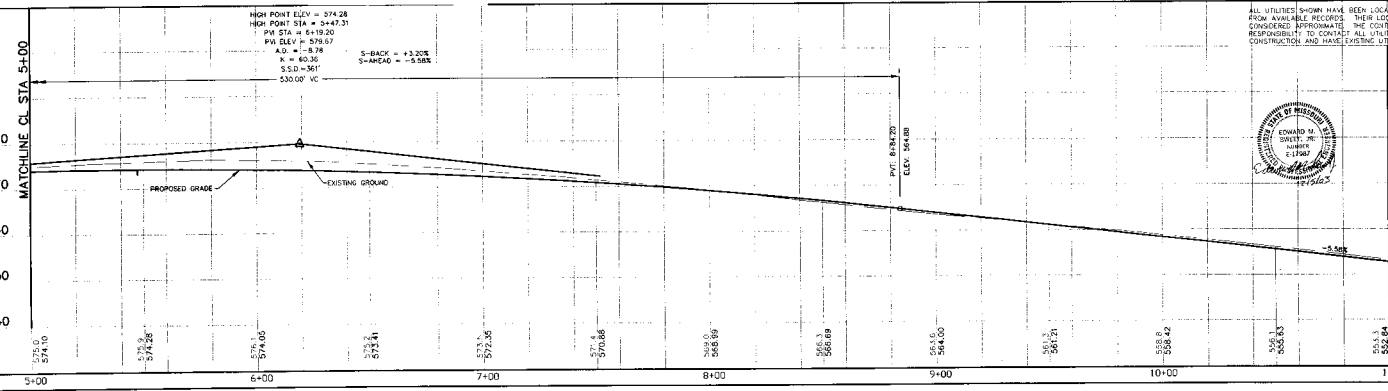

ALL UTILITIES SHOWN HAVE BEEN LOCATED BY THE ENGINEER FROM AVAILABLE RECORDS. THEIR LOCATION SHOULD BE CONFIRMED PRIOR TO THE CONSTRUCTION. THE CONTRACTOR HAS THE RESPONSIBILITY TO CONTACT ALL UTILITIES COMPANIES PRIOR TO CONSTRUCTION AND MAKE NECESSARY UTILITIES FIELD LOCATIONS.

PLAN

DATE	
SCALE	
BY	
CHECKED	
DATE	

PROFILE

DATE	
SCALE	
BY	
CHECKED	
DATE	

P. POINT DATA

STATION	ELEVATION
5+00	574.10
6+00	574.05
7+00	573.35
8+00	570.88
9+00	566.00
10+00	558.42
11+00	552.84