


GRAPHIC SCALE

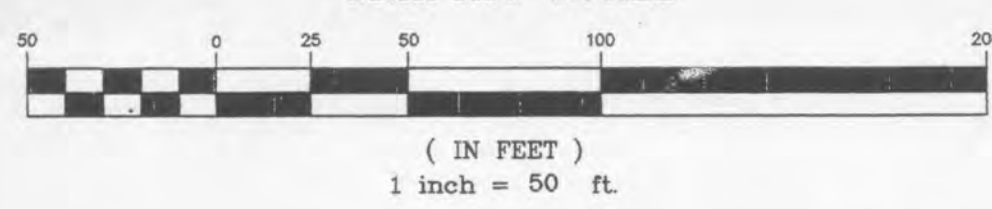

PLANTING SCHEDULE

Table with 5 columns: QTY, BOTANICAL NAME, COMMON NAME, SIZE, SPACING. Lists various plant species and their quantities for the project.

TREE PLANTING REQUIREMENTS

STREET FRONTAGE REQUIREMENTS
1 TREE FOR EVERY 40 FEET OF STREET FRONTAGE.
FRONTAGE ALONG HWY "K" - 1230'
TREES REQUIRED - 31

OPEN SPACE REQUIREMENTS

1 TREE PER EVERY 3000 S.F. OF LANDSCAPED OPEN SPACE.
LANDSCAPED OPEN SPACE - 175,011 S.F.
TREES REQUIRED - 58

TOTAL TREES REQ'D = 82+58=140
TOTAL TREES PROVIDED 53

TREE PRESERVATION

6 ACRES TO BE REMOVED (EST.)
20 TREES PER ACRE TO BE REPLACED (EST.)
TOTAL TREES NEEDED TO BE REPLACED - 120
TOTAL TREES REPLACED = 53

AN ADDITIONAL 583 TREES WILL BE PROVIDED IN THE FLOOD MITIGATION AREA TO MEET THE CITY'S REQUIREMENTS AS WELL AS THE CORPS OF ENGINEERS.

INTERIOR LANDSCAPING REQUIREMENTS

THE HOME DEPOT
INTERIOR PARKING AREA: 580,270 - 155,600 S.F.
INTERIOR LANDSCAPING REQUIRED: 6% OF INTERIOR PARKING AREA - 9,396 S.F.
INTERIOR LANDSCAPING PROVIDED - 12,964 S.F.

THE LANDSCAPE SHOWN SHOULD BE USED AS A GUIDELINE ONLY. IF A CONTRACTOR PREPARES A DESIGN, IT CAN BE USED PROVIDED IT IS APPROVED BY "THE HOME DEPOT".

THE LANDSCAPE CONTRACTOR SHALL DESIGN AN AUTOMATIC IRRIGATION SYSTEM THAT WOULD ADEQUATELY COVER THE PROPOSED PLANTINGS. THIS DESIGN SHALL BE APPROVED BY THE HOME DEPOT CONSTRUCTION MANAGER PRIOR TO INSTALLATION. REFER TO THE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

GENERAL NOTES:

- 1. ALL BARE SOIL AREAS TO BE SEED/SODDED WITH A TURF TYPE TALL FESCUE MIX.
2. ALL PLANT MATERIALS MUST MEET THE SPECIFICATIONS OF THE AMERICAN ASSOCIATION OF NURSERMEN.
3. ALL PLANT MATERIALS MUST HAVE ONE YEAR REPLACEMENT GUARANTEE FROM DATE OF ACCEPTANCE.
4. ALL TREES TO RECEIVE A 3 INCH LAYER OF BARK MULCH IN A RING OF 4 FOOT MIN. DIAMETER UNLESS IN ISLAND.
5. ALL SHRUBS TO RECEIVE A 3 INCH LAYER OF BARK MULCH IN A RING OF 3 FOOT MIN. DIAMETER UNLESS IN ISLAND.
6. FIELD VERIFY LOCATION OF ALL UTILITIES AND SITE FIXTURES AND RESPACE PLANTINGS IF REQUIRED.
7. PROVIDE SOD @ ALL AREAS W/ 3:1 SLOPE. SOD SHALL BE SIMILAR TO MATCH SEEDING ABOVE.
8. NO PORTION OF THE IRRIGATION SHALL BE PLACED IN THE RIGHT OF WAY.

CONSERVATION EASEMENT 2.30 ACRES

NOTE: AREAS TO BE SODDED ARE:
1. SOUTH OF THE HIGHWAY K ACCESS FROM EDGE OF PARKING LOT TO EDGE OF HIGHWAY K, BEHIND THE BUILDING TO EAST EDGE OF TRUCK-DOCK.
2. ALL AREAS OF FUTURE ROW.
3. AREA BETWEEN PARKING LOT AND LOOP ROAD AND DRIVEWAYS.
4. BETWEEN PARKING LOT AND WESTERN SIDE OF RETAINING WALL.
5. MINIMUM 2' BEHIND CURBS ELSEWHERE.

PLANTING LEGEND

- SHADEMASTER THORNLESS HONEYLOCUST
MISSOURI STATE HIGHWAY "K"
BRADFORD PEAR
NEWPORT PLUM
WHITE PINE
NORWAY SPRUCE
SEA GREEN JUNIPER
DWARF BURNING BUSH
TAUTON YEW
DWARF FOUNTAIN GRASS
MAIDEN GRASS
DWARF JAPANESE GARDEN JUNIPER

THE PROFESSIONAL WHOSE SIGNATURE AND PERSONAL SEAL APPEARS ON THIS DRAWING ASSUMES RESPONSIBILITY ONLY FOR WHAT APPEARS ON THIS DRAWING AND DISCLAIMS (PURSUANT TO SECTION 324.411 RSMo) ANY RESPONSIBILITY FOR ALL OTHER PLANS, SPECIFICATIONS, ESTIMATES, REPORTS OR OTHER DOCUMENTS OR INSTRUMENTS NOT SEALED BY UNDERSIGNED PROFESSIONAL RELATING TO OR INTENDED TO BE USED FOR ANY PART OR PARTS OF THE PROJECT TO WHICH THIS DRAWING REFERS.

LANDSCAPE PLAN

Vertical sidebar containing project information: THE HOME DEPOT SOUTHWEST DIVISION 2800 FOREST LANE DALLAS, TX. 75234. James B. Becker CONSULTING ENGINEERS. ST. LOUIS, MISSOURI 63123. DATE: 02/27/99. REVISIONS: 02/27/99, 03/02/99, 03/07/99, 06/07/99.