




**CONCRETE CURB DETAIL**  
NO SCALE

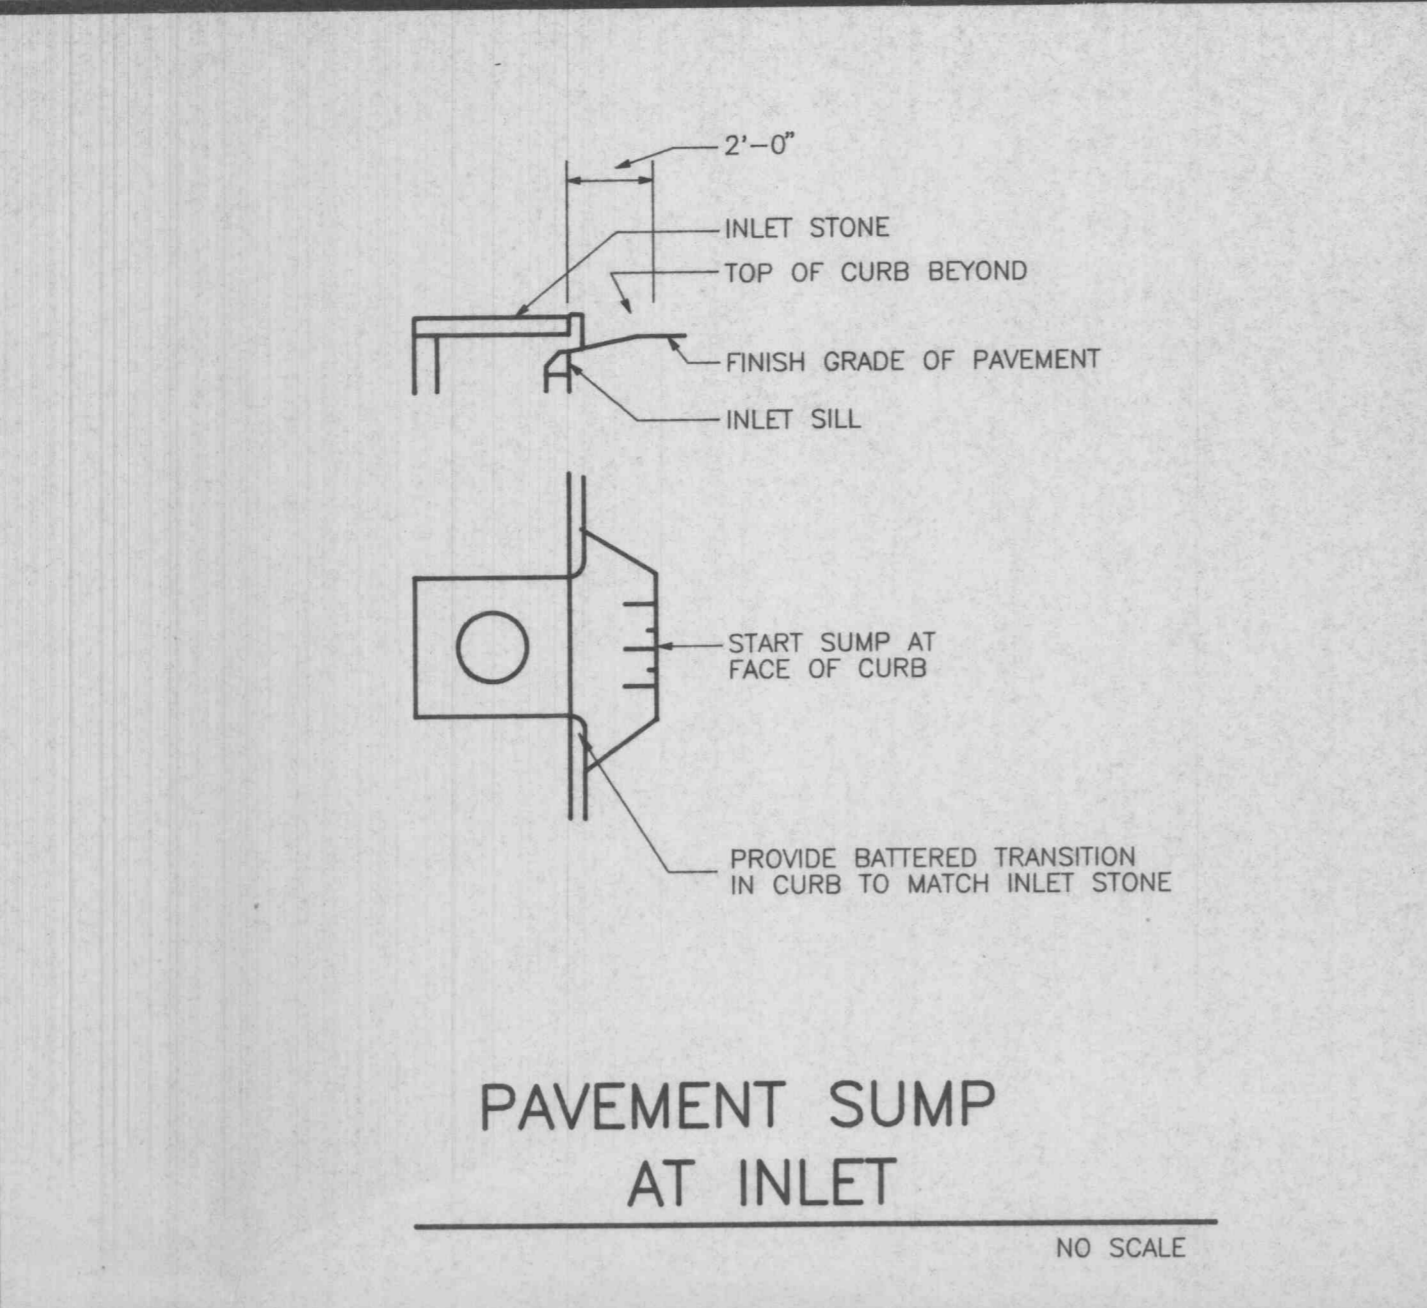


**PAVEMENT SUMP AT INLET**  
NO SCALE

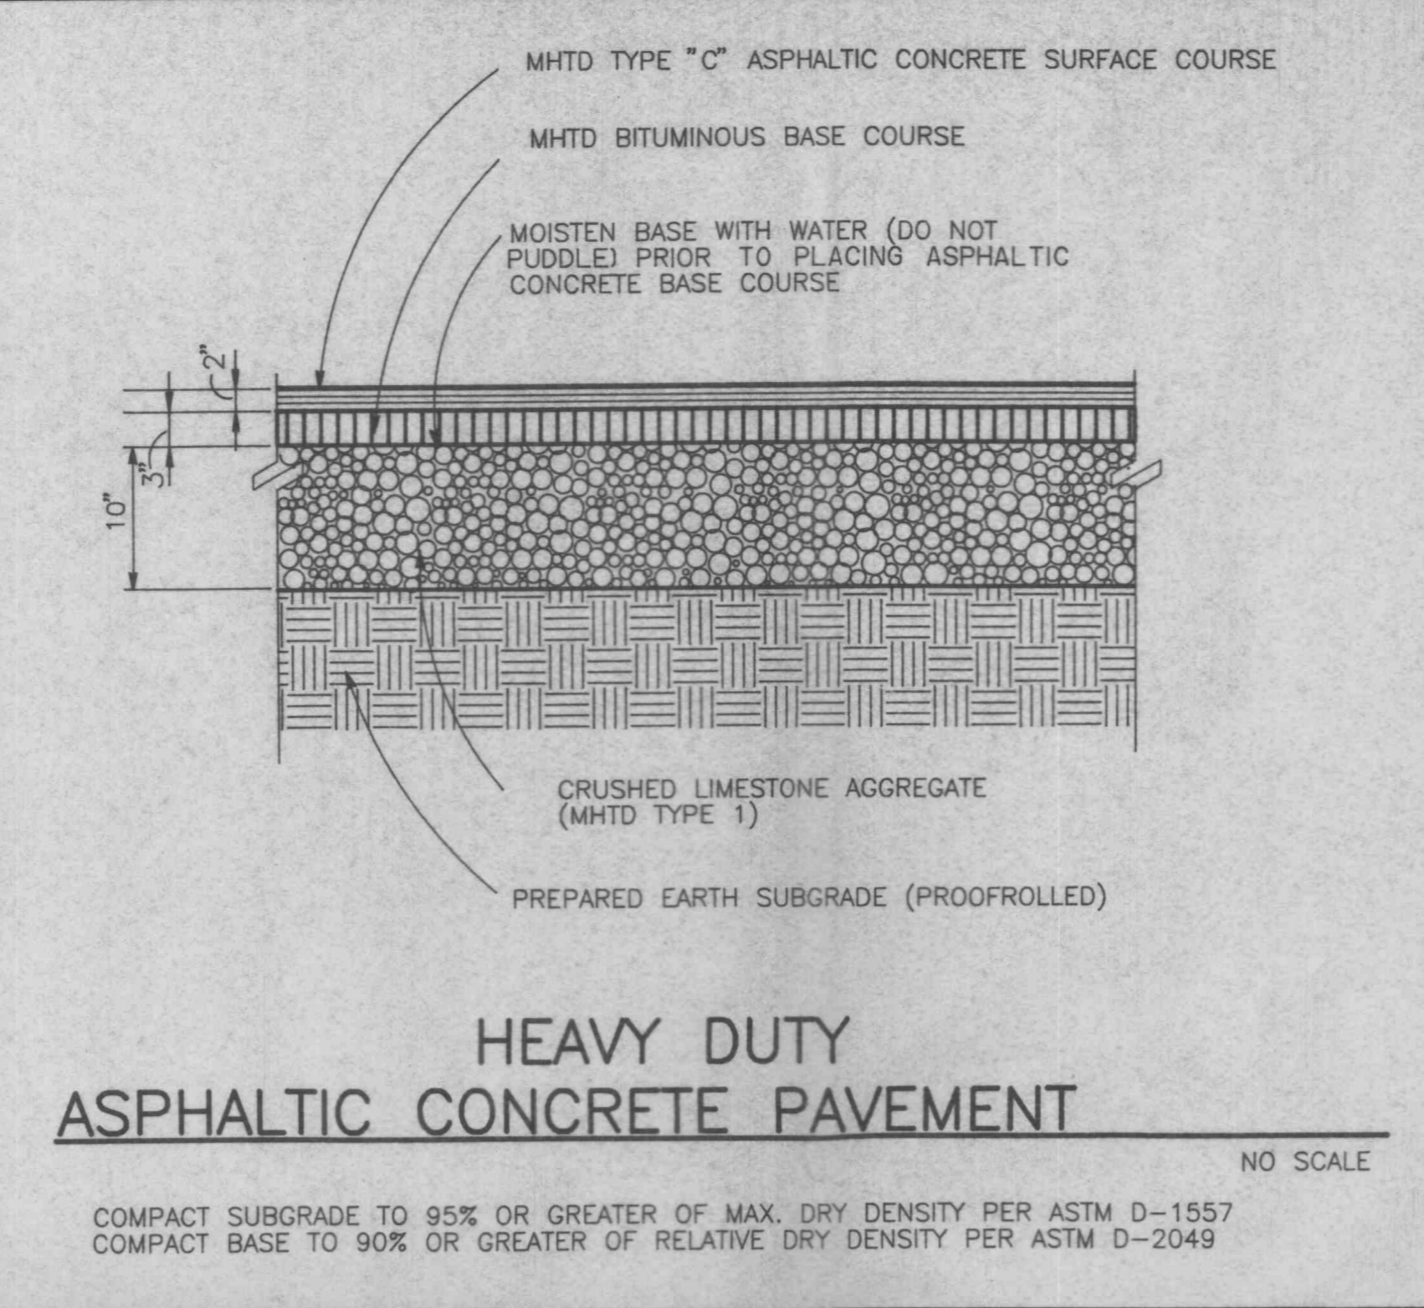


**HEAVY DUTY ASPHALTIC CONCRETE PAVEMENT**  
NO SCALE  
COMPACT SUBGRADE TO 95% OR GREATER OF MAX. DRY DENSITY PER ASTM D-1557  
COMPACT BASE TO 90% OR GREATER OF RELATIVE DRY DENSITY PER ASTM D-2049

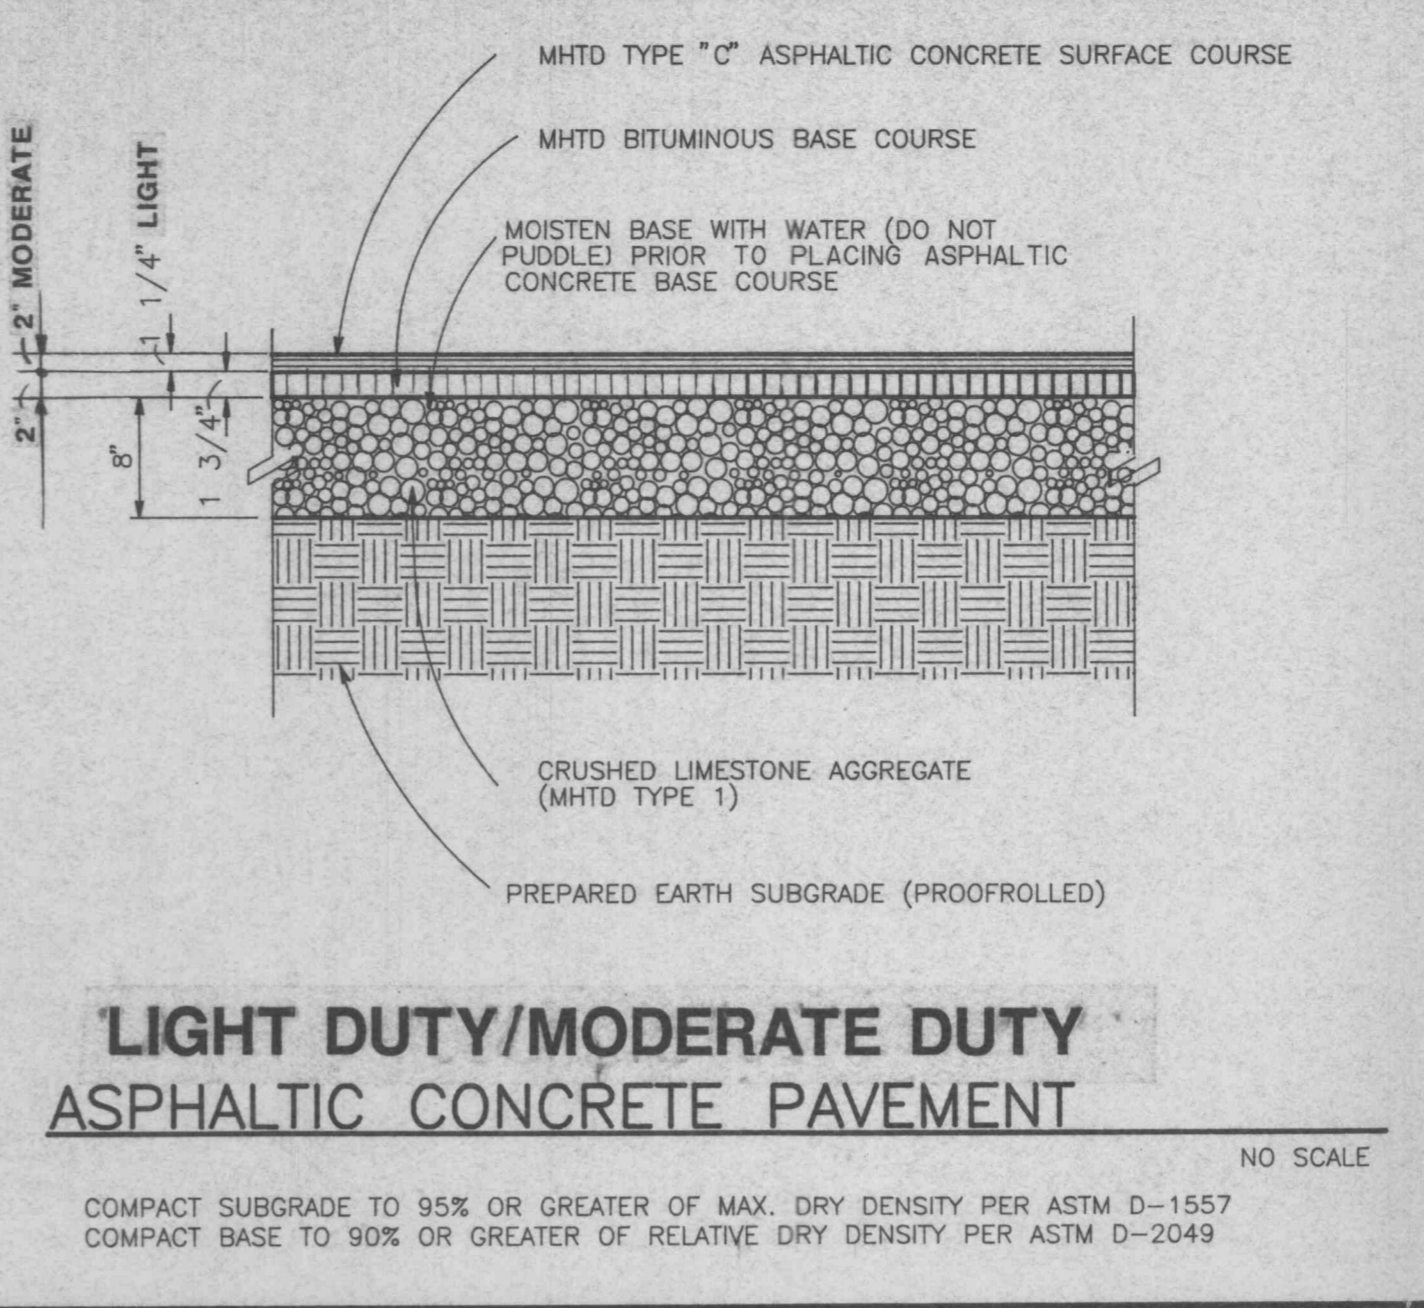


**LIGHT DUTY/MODERATE DUTY ASPHALTIC CONCRETE PAVEMENT**  
NO SCALE  
COMPACT SUBGRADE TO 95% OR GREATER OF MAX. DRY DENSITY PER ASTM D-1557  
COMPACT BASE TO 90% OR GREATER OF RELATIVE DRY DENSITY PER ASTM D-2049

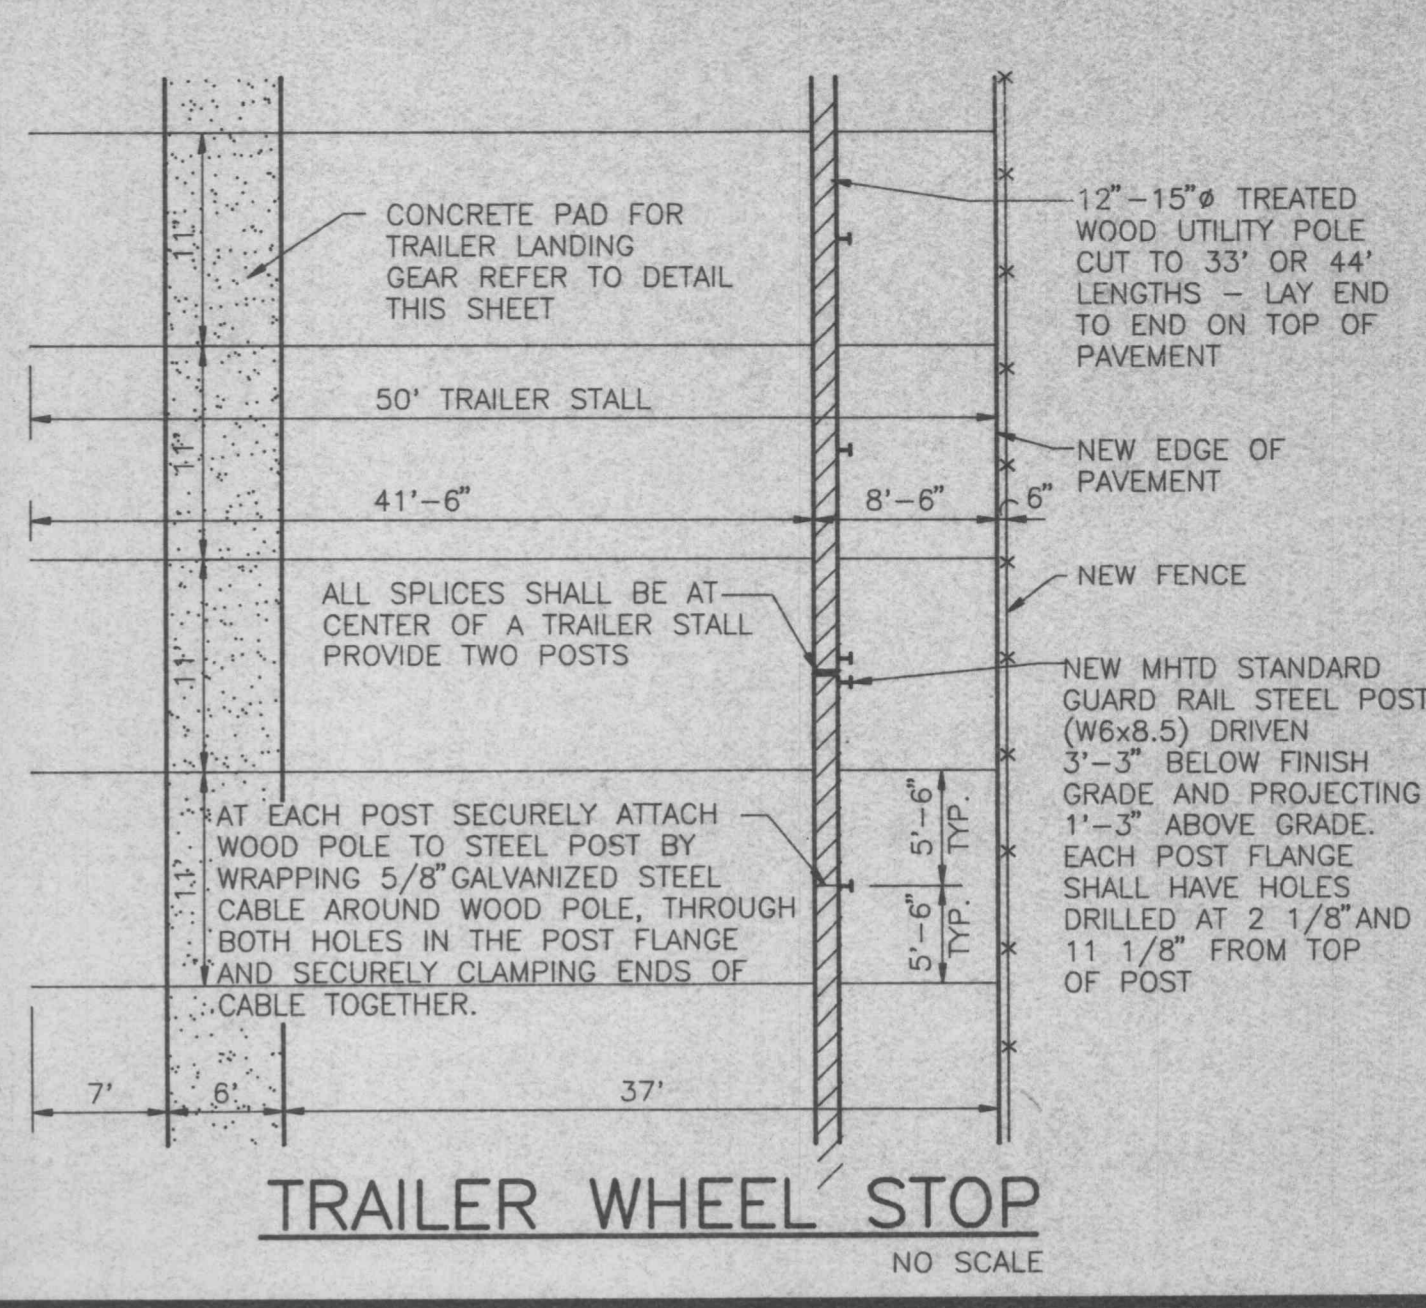


**TRAILER WHEEL STOP**  
NO SCALE

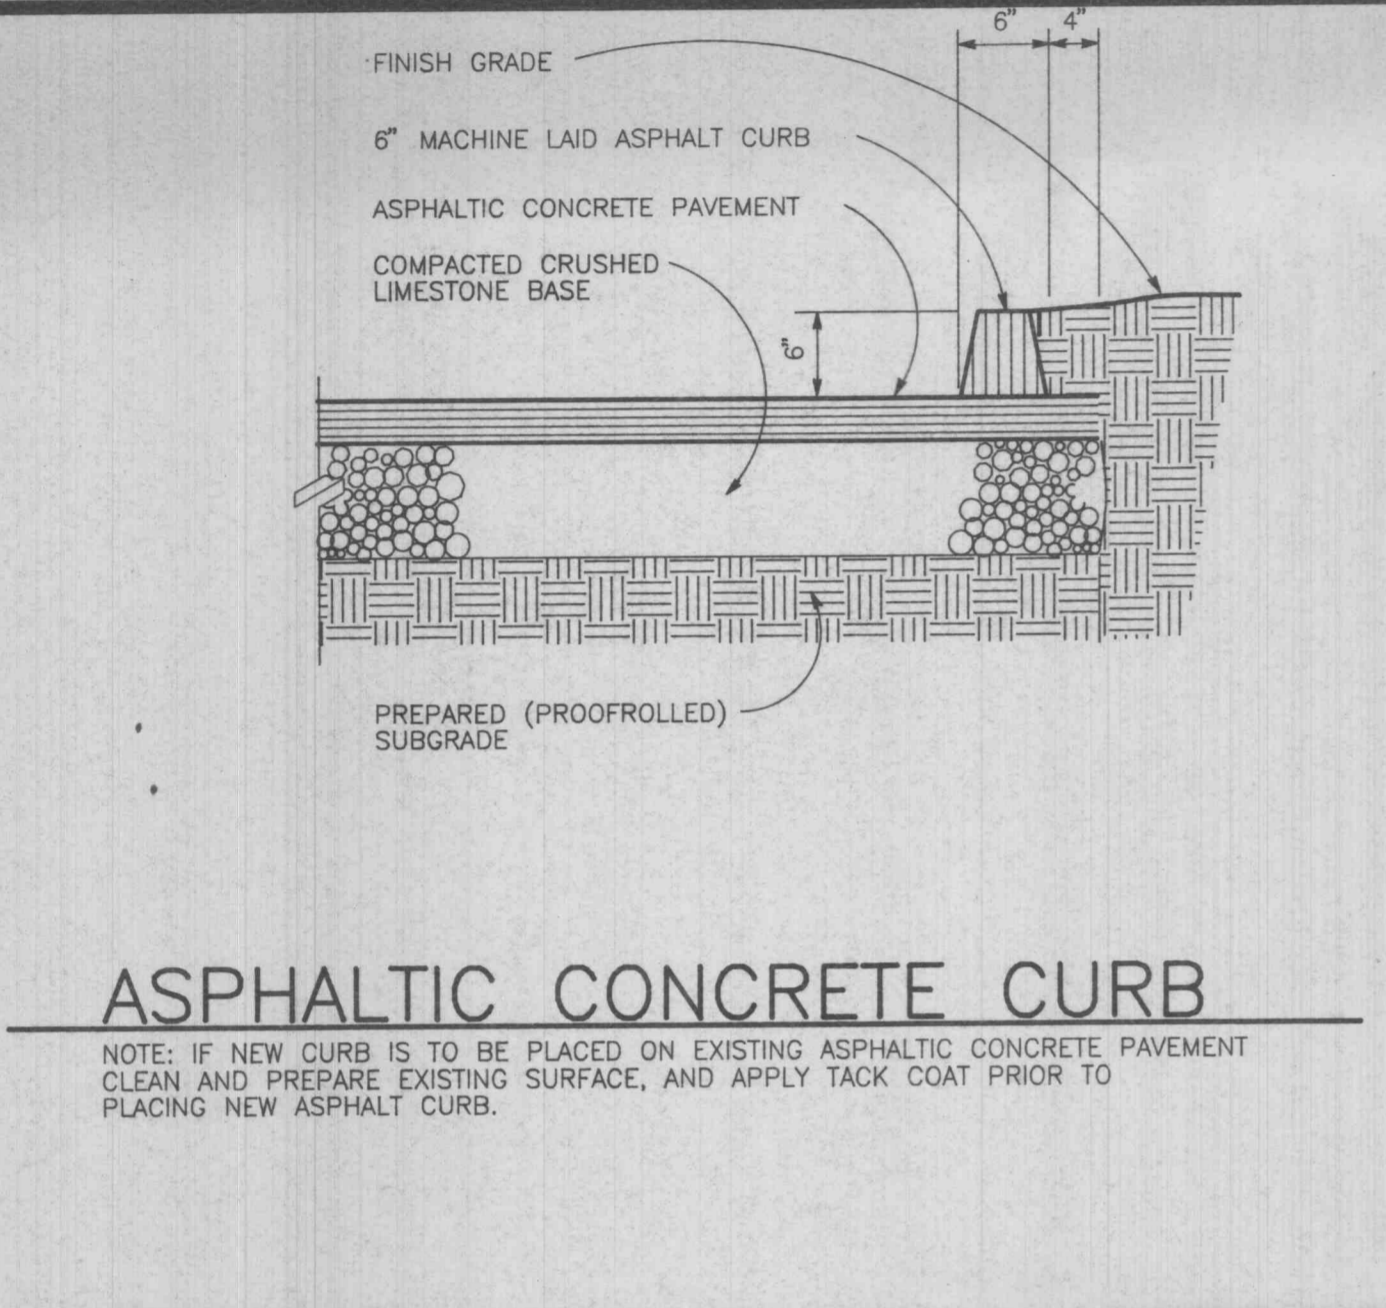


**ASPHALTIC CONCRETE CURB**  
NOTE: IF NEW CURB IS TO BE PLACED ON EXISTING ASPHALTIC CONCRETE PAVEMENT CLEAN AND PREPARE EXISTING SURFACE, AND APPLY TACK COAT PRIOR TO PLACING NEW ASPHALT CURB.

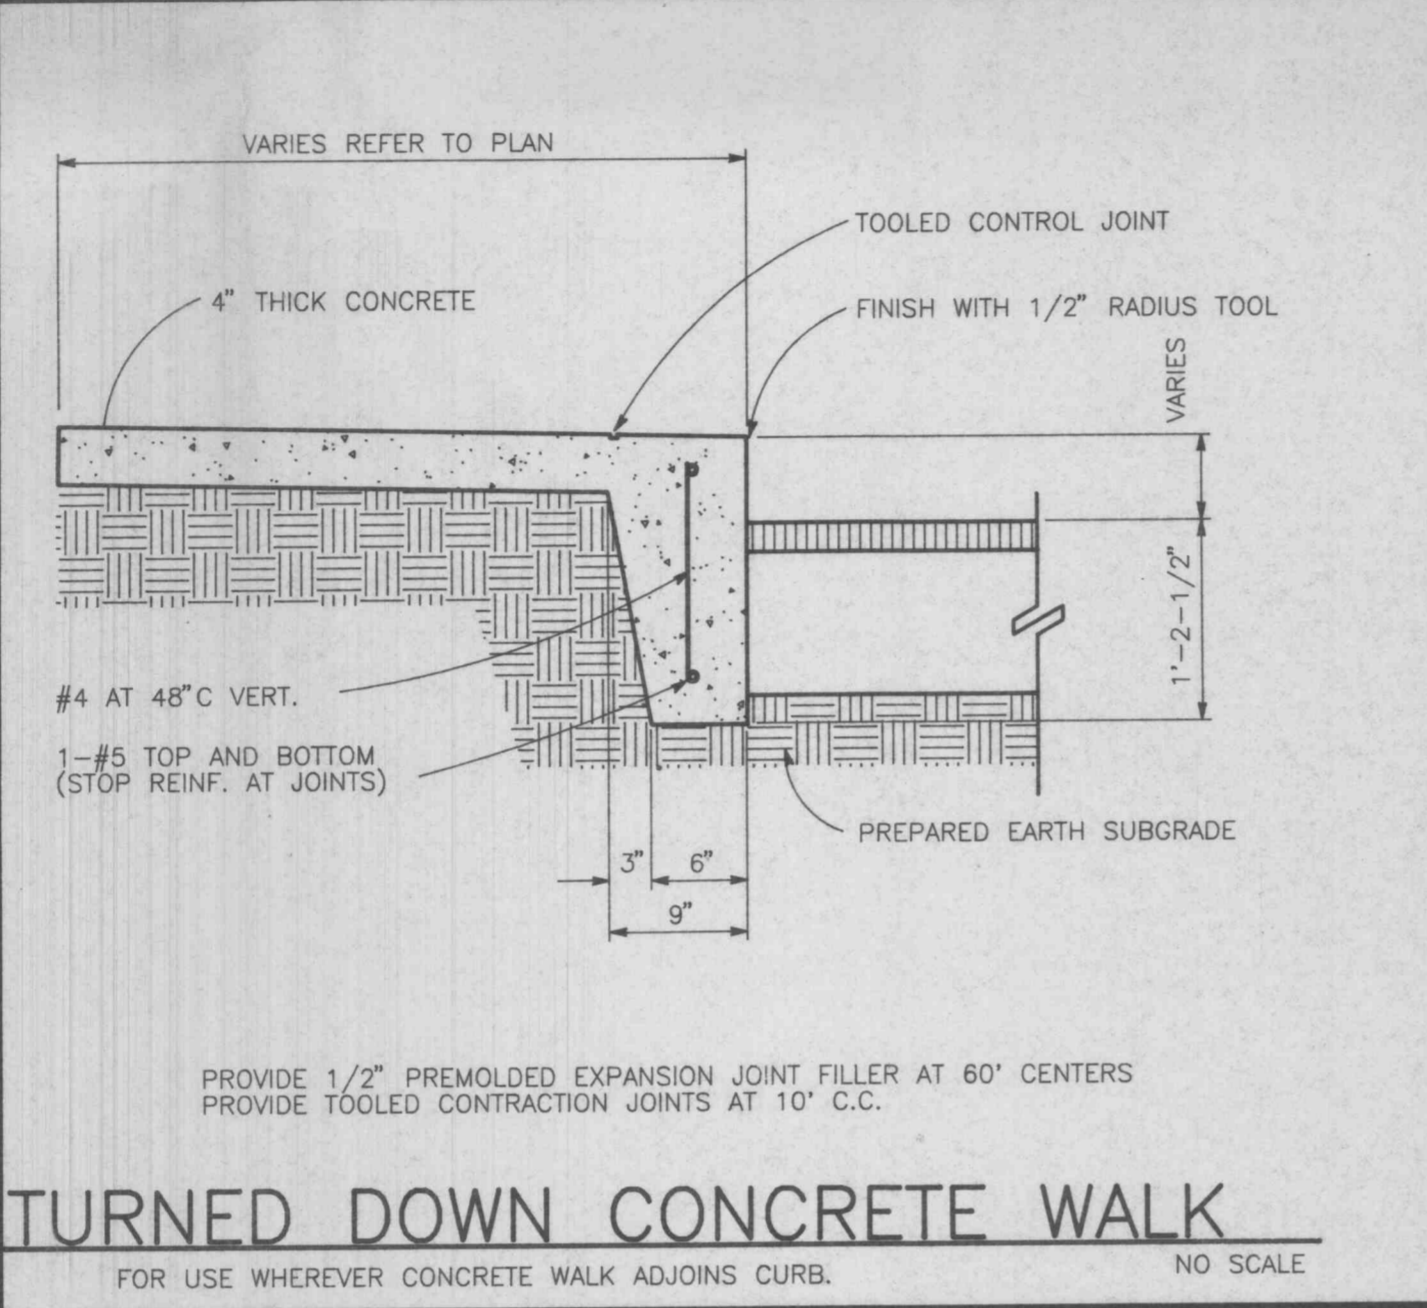


**TURNED DOWN CONCRETE WALK**  
NO SCALE  
FOR USE WHEREVER CONCRETE WALK ADJOINS CURB.  
PROVIDE 1/2" PREMOLDED EXPANSION JOINT FILLER AT 60" CENTERS  
PROVIDE TOOLED CONTRACTION JOINTS AT 10' C.C.

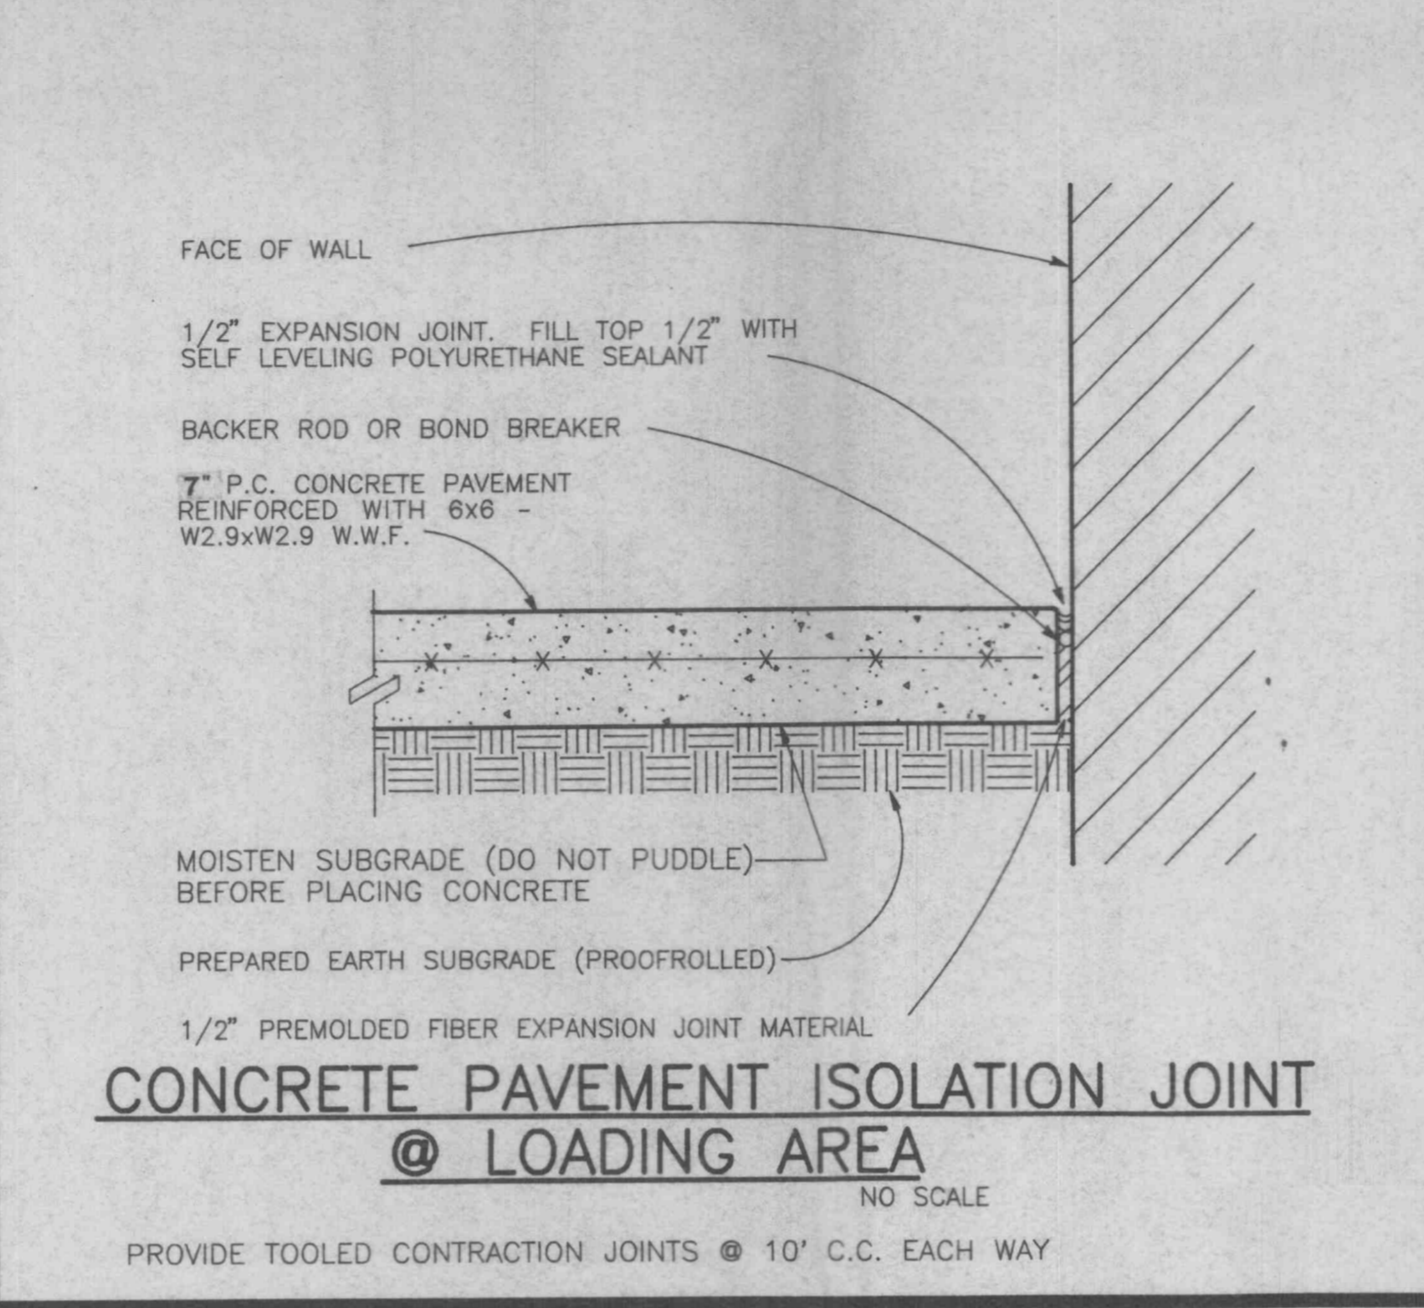


**CONCRETE PAVEMENT ISOLATION JOINT @ LOADING AREA**  
NO SCALE  
PROVIDE TOOLED CONTRACTION JOINTS @ 10' C.C. EACH WAY

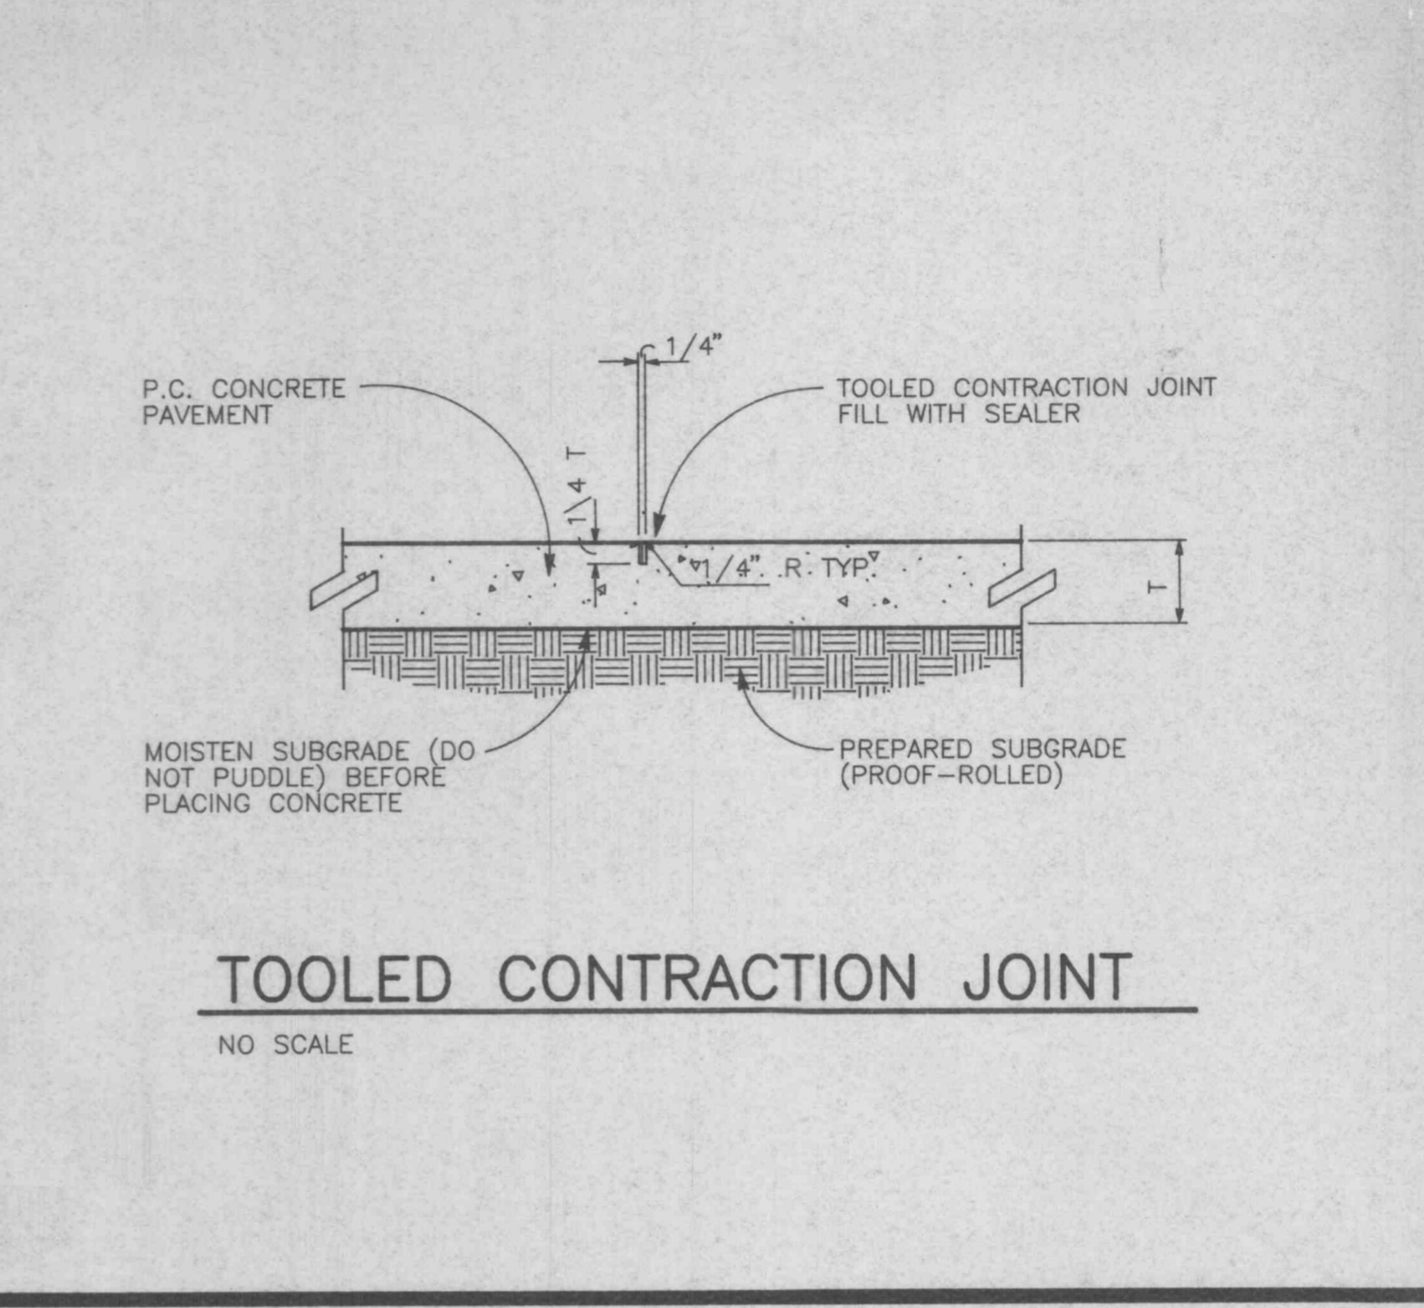


**TOOLED CONTRACTION JOINT**  
NO SCALE

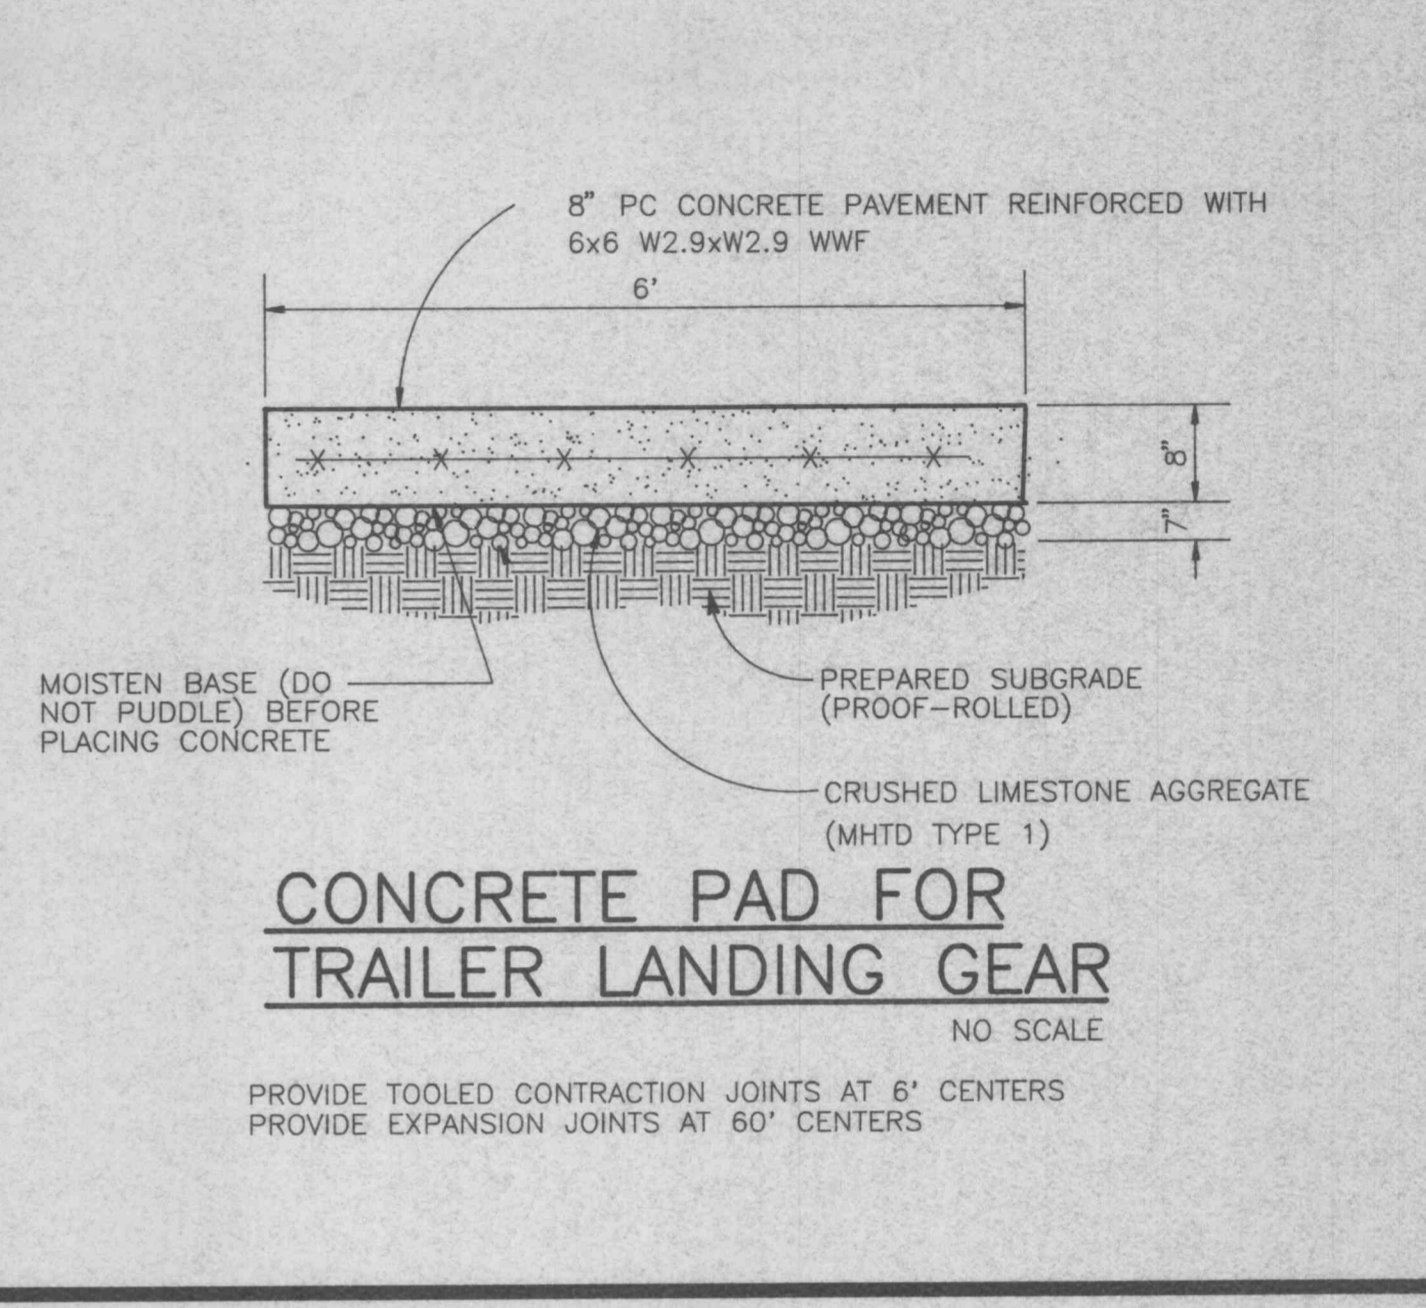


**CONCRETE PAD FOR TRAILER LANDING GEAR**  
NO SCALE  
PROVIDE TOOLED CONTRACTION JOINTS AT 6' CENTERS  
PROVIDE EXPANSION JOINTS AT 60' CENTERS

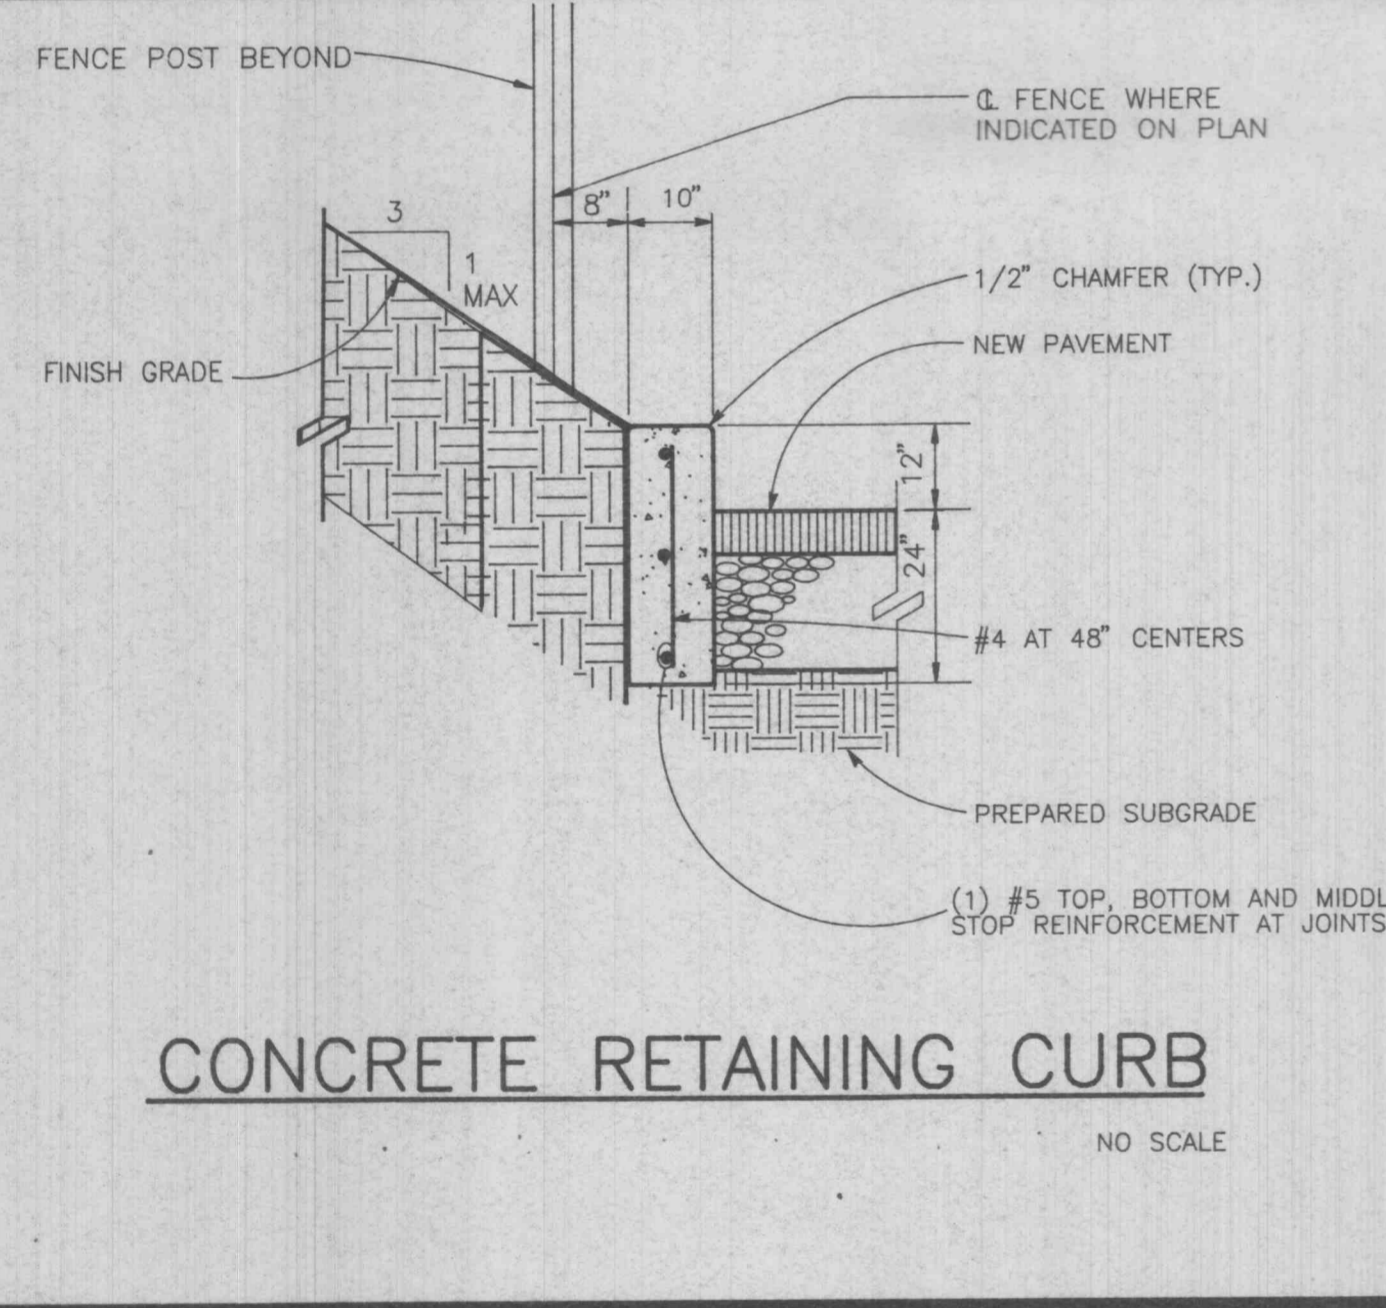


**CONCRETE RETAINING CURB**  
NO SCALE

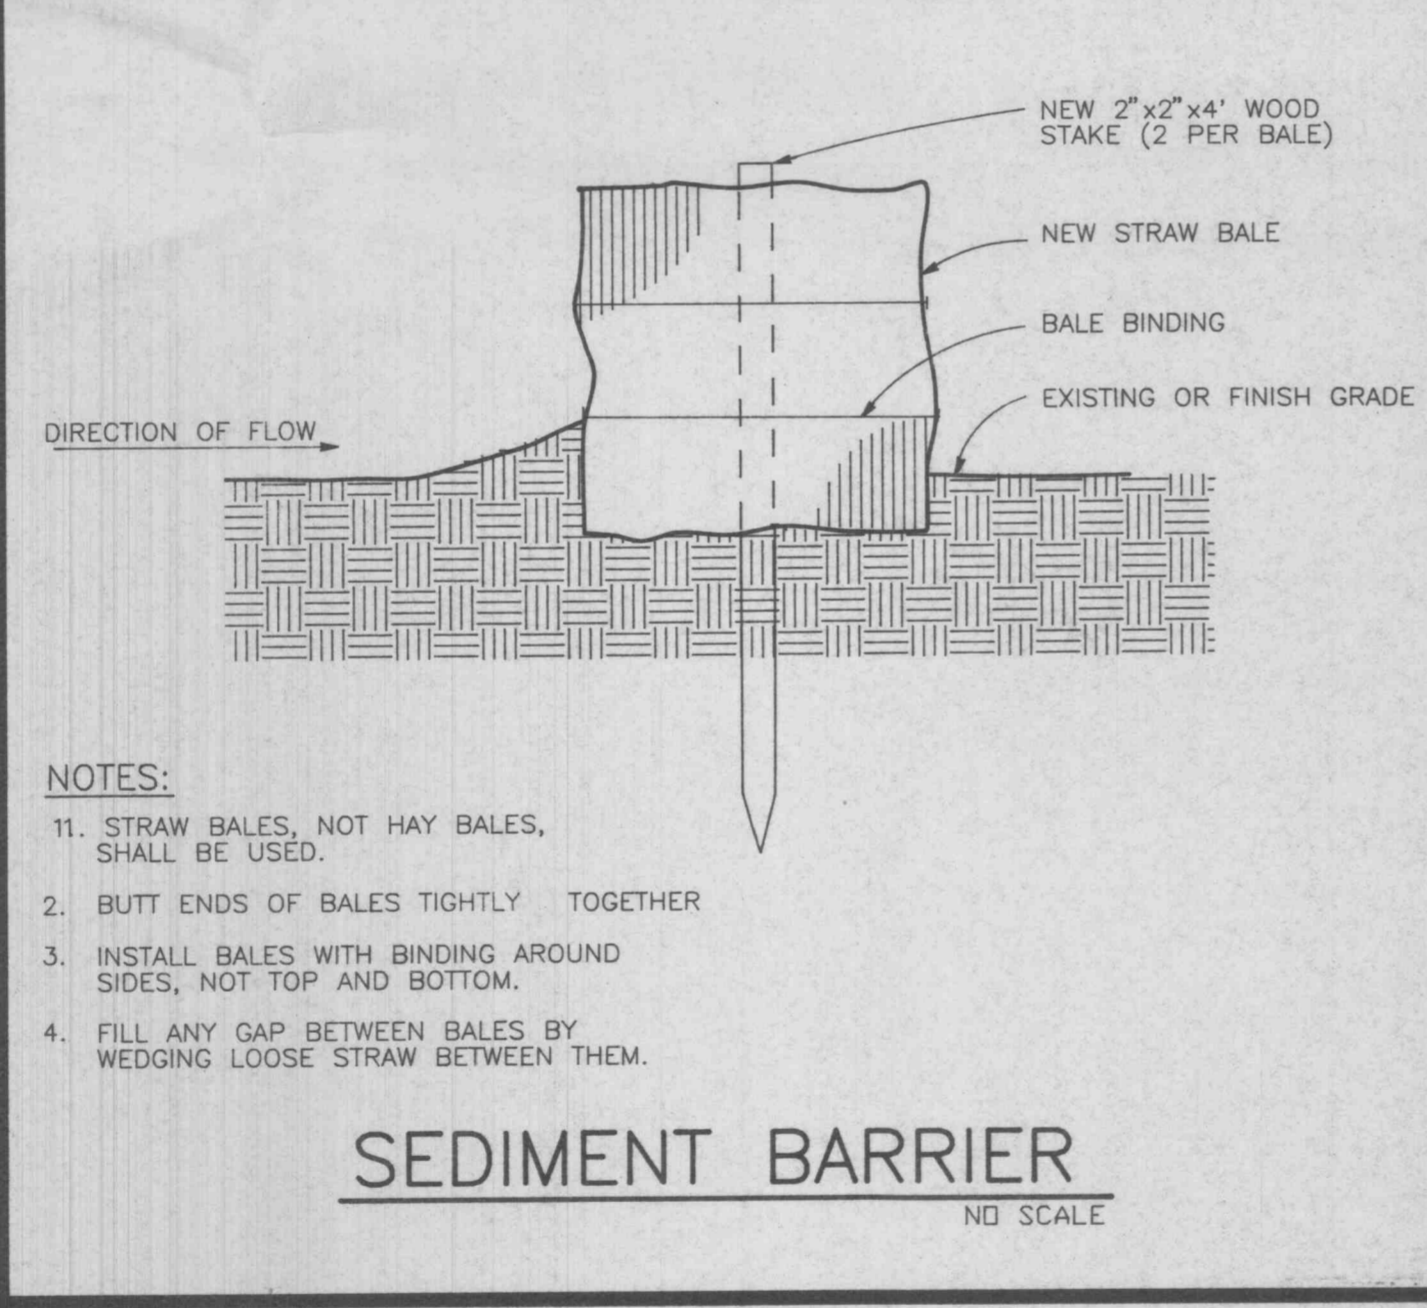


**SEDIMENT BARRIER**  
NO SCALE

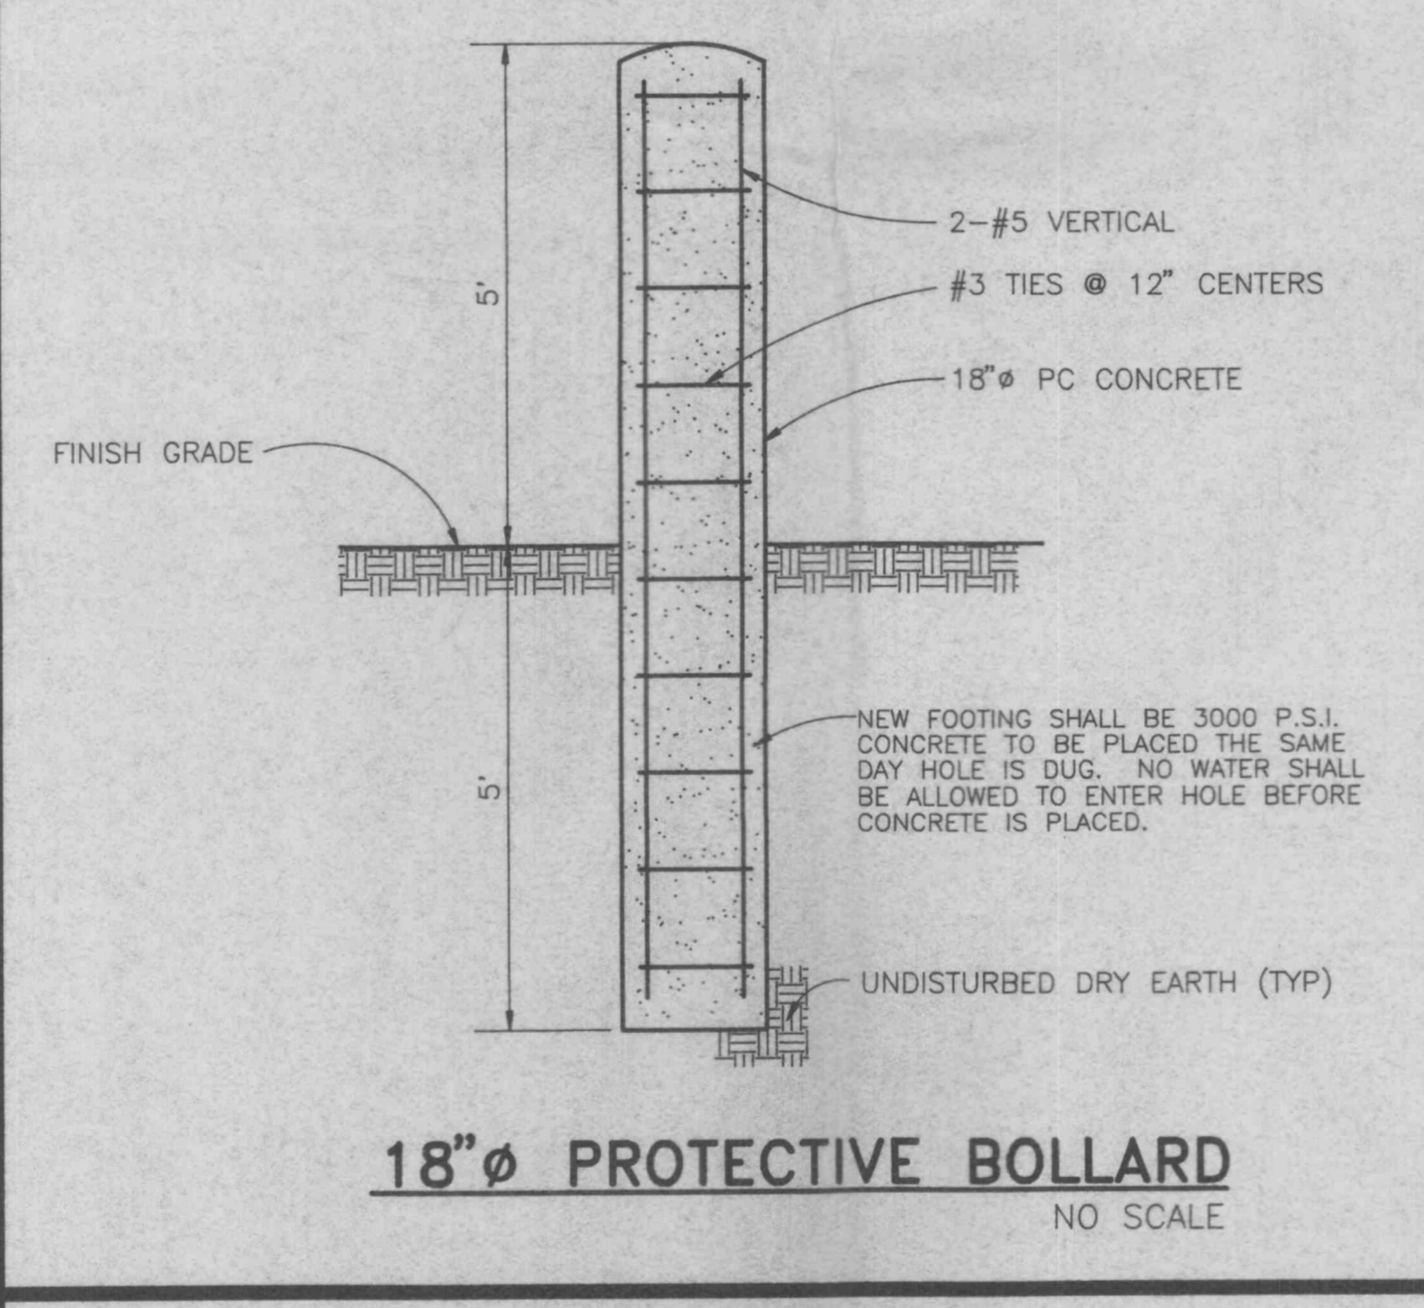


**18" PROTECTIVE BOLLARD**  
NO SCALE

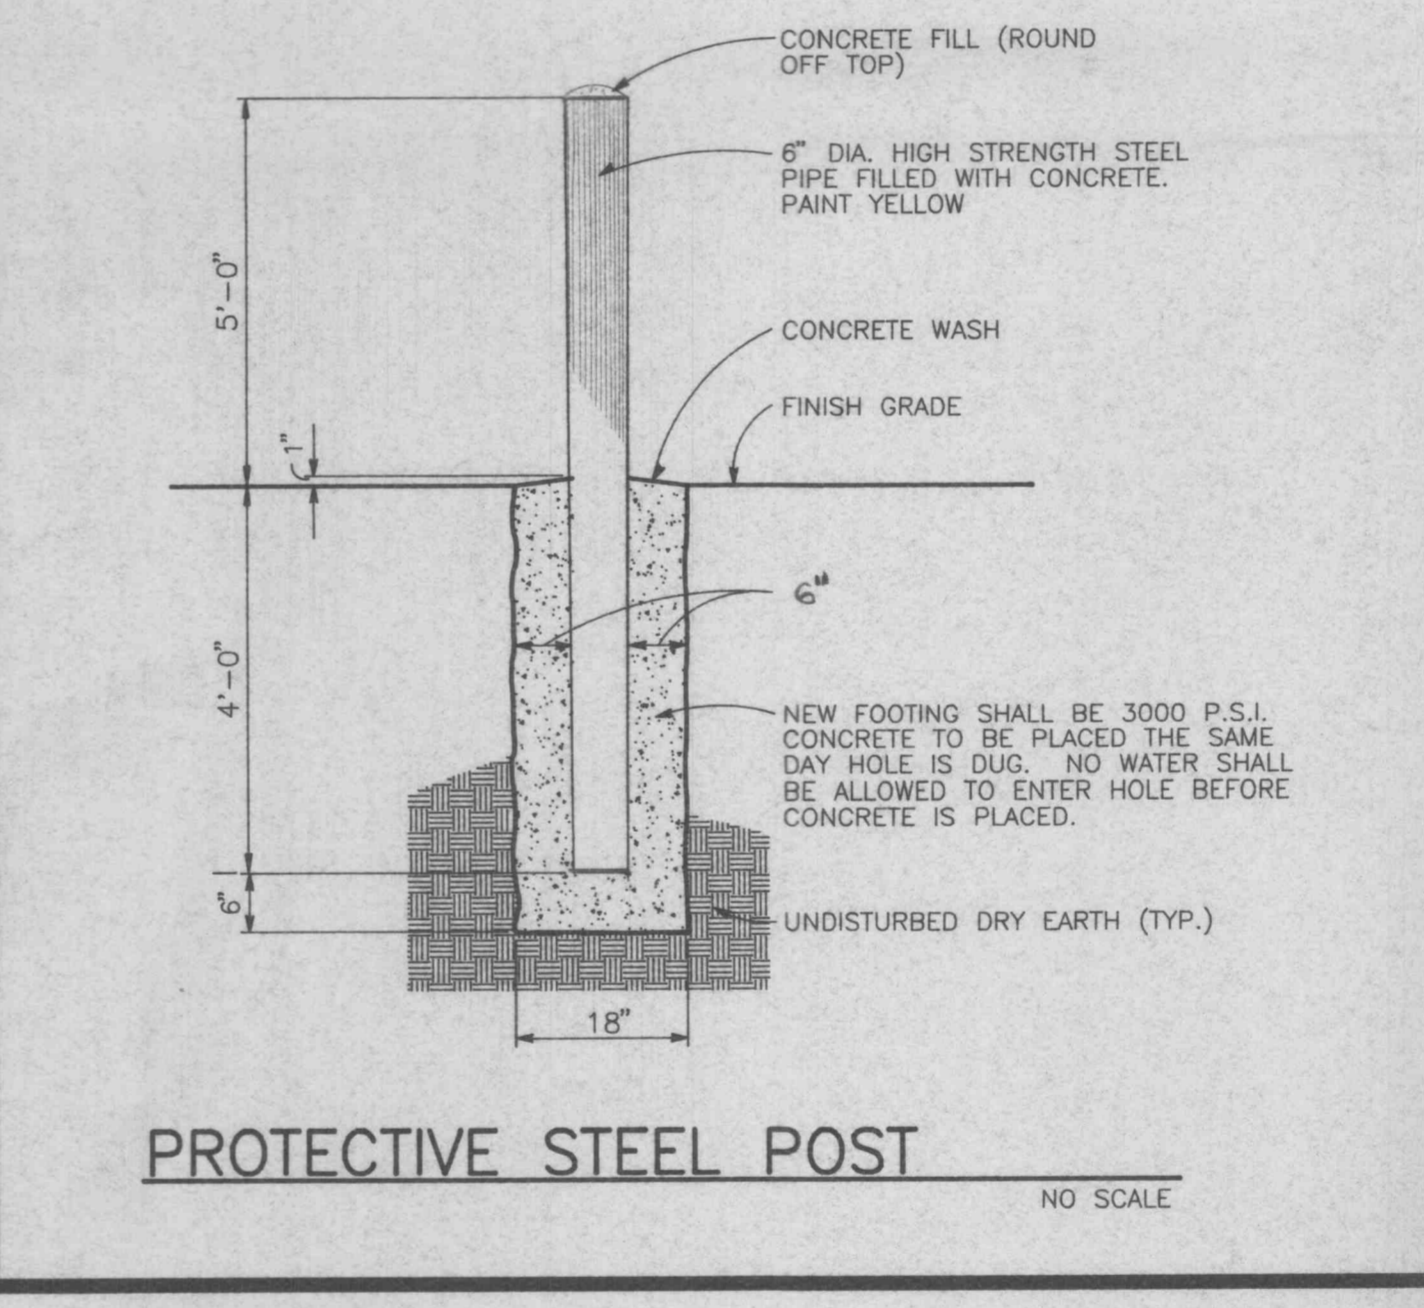


**PROTECTIVE STEEL POST**  
NO SCALE

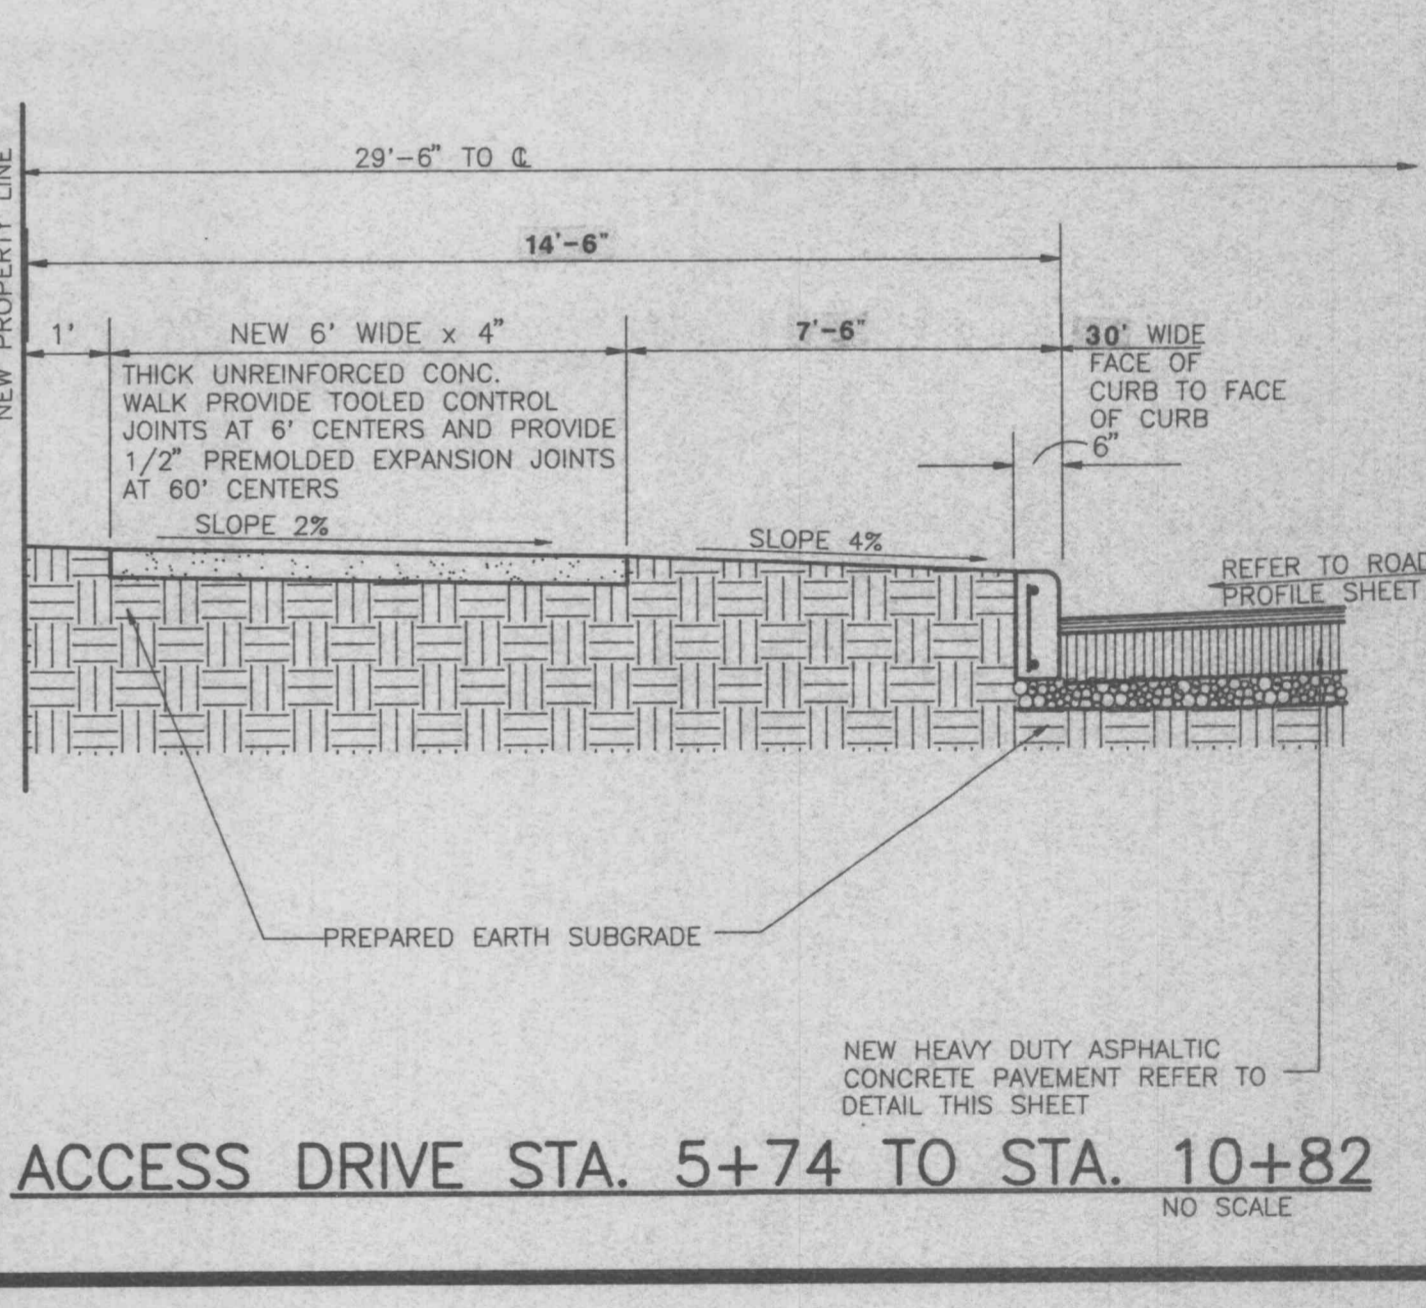


**ACCESS DRIVE STA. 5+74 TO STA. 10+82**  
NO SCALE

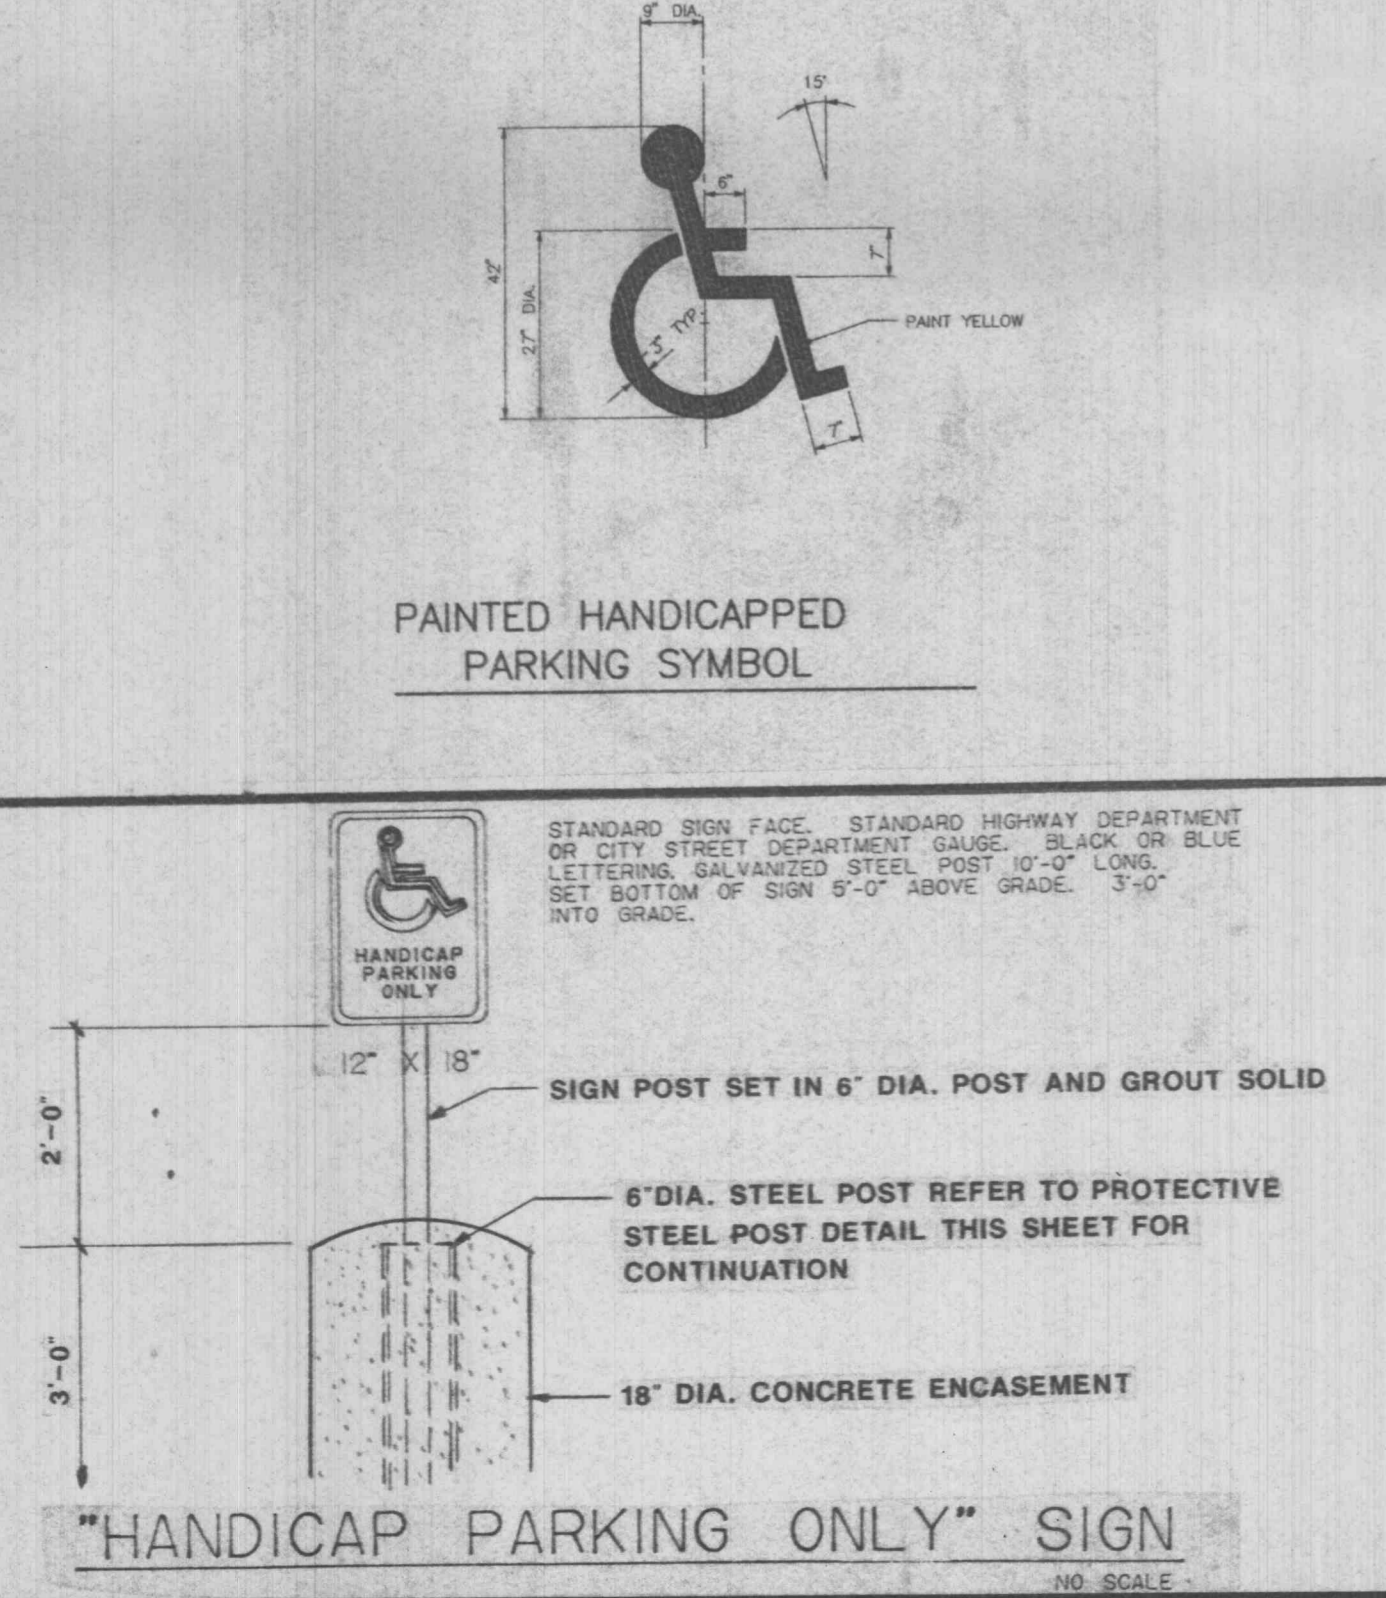



**PAINTED HANDICAPPED PARKING SYMBOL**  
NO SCALE  
SIGN POST SET IN 6" DIA. POST AND GROUT SOLID  
6" DIA. STEEL POST REFER TO PROTECTIVE STEEL POST DETAIL THIS SHEET FOR CONTINUATION  
18" DIA. CONCRETE ENCASEMENT  
"HANDICAP PARKING ONLY" SIGN

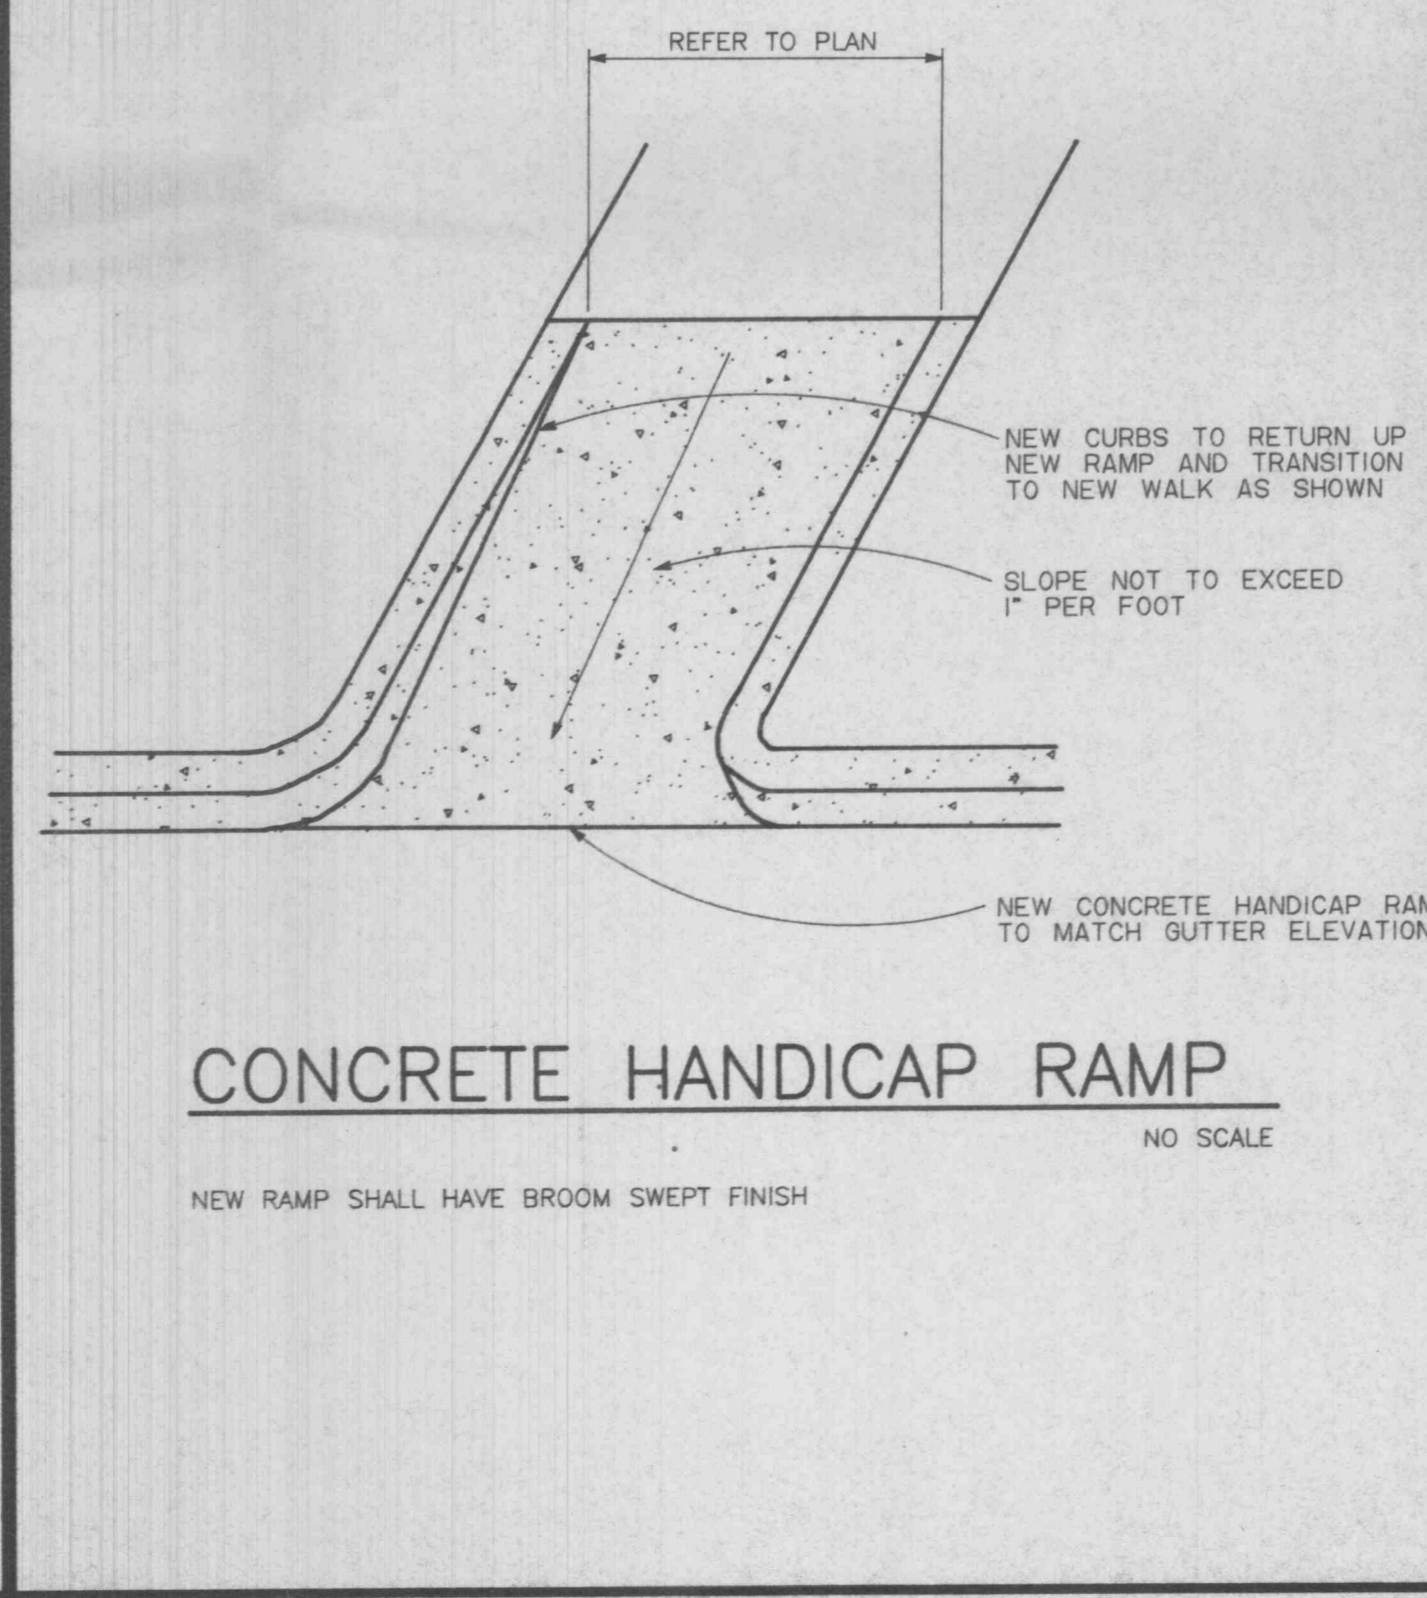

**CONCRETE HANDICAP RAMP**  
NO SCALE  
NEW RAMP SHALL HAVE BROOM SWEEP FINISH

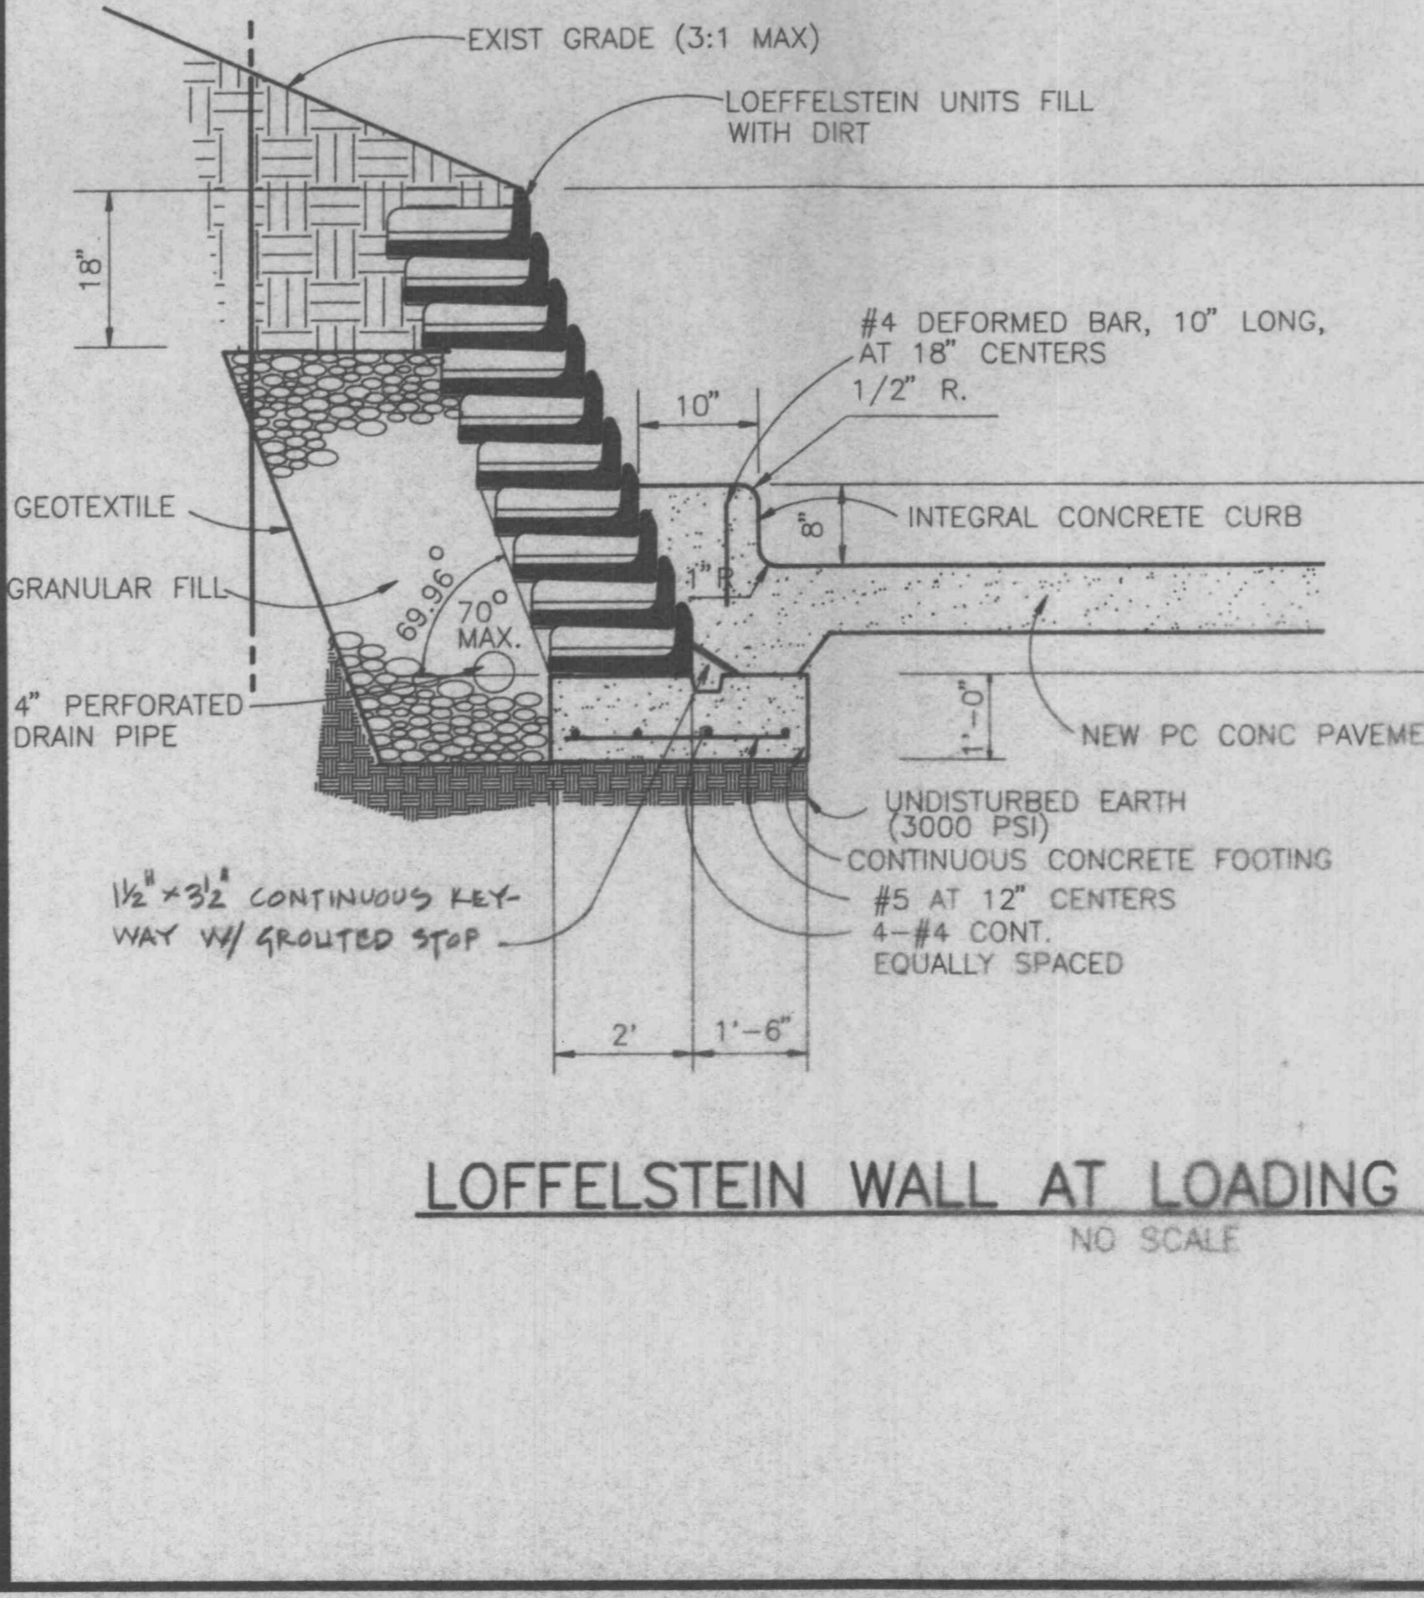

**LOFFELSTEIN WALL AT LOADING AREA**  
NO SCALE

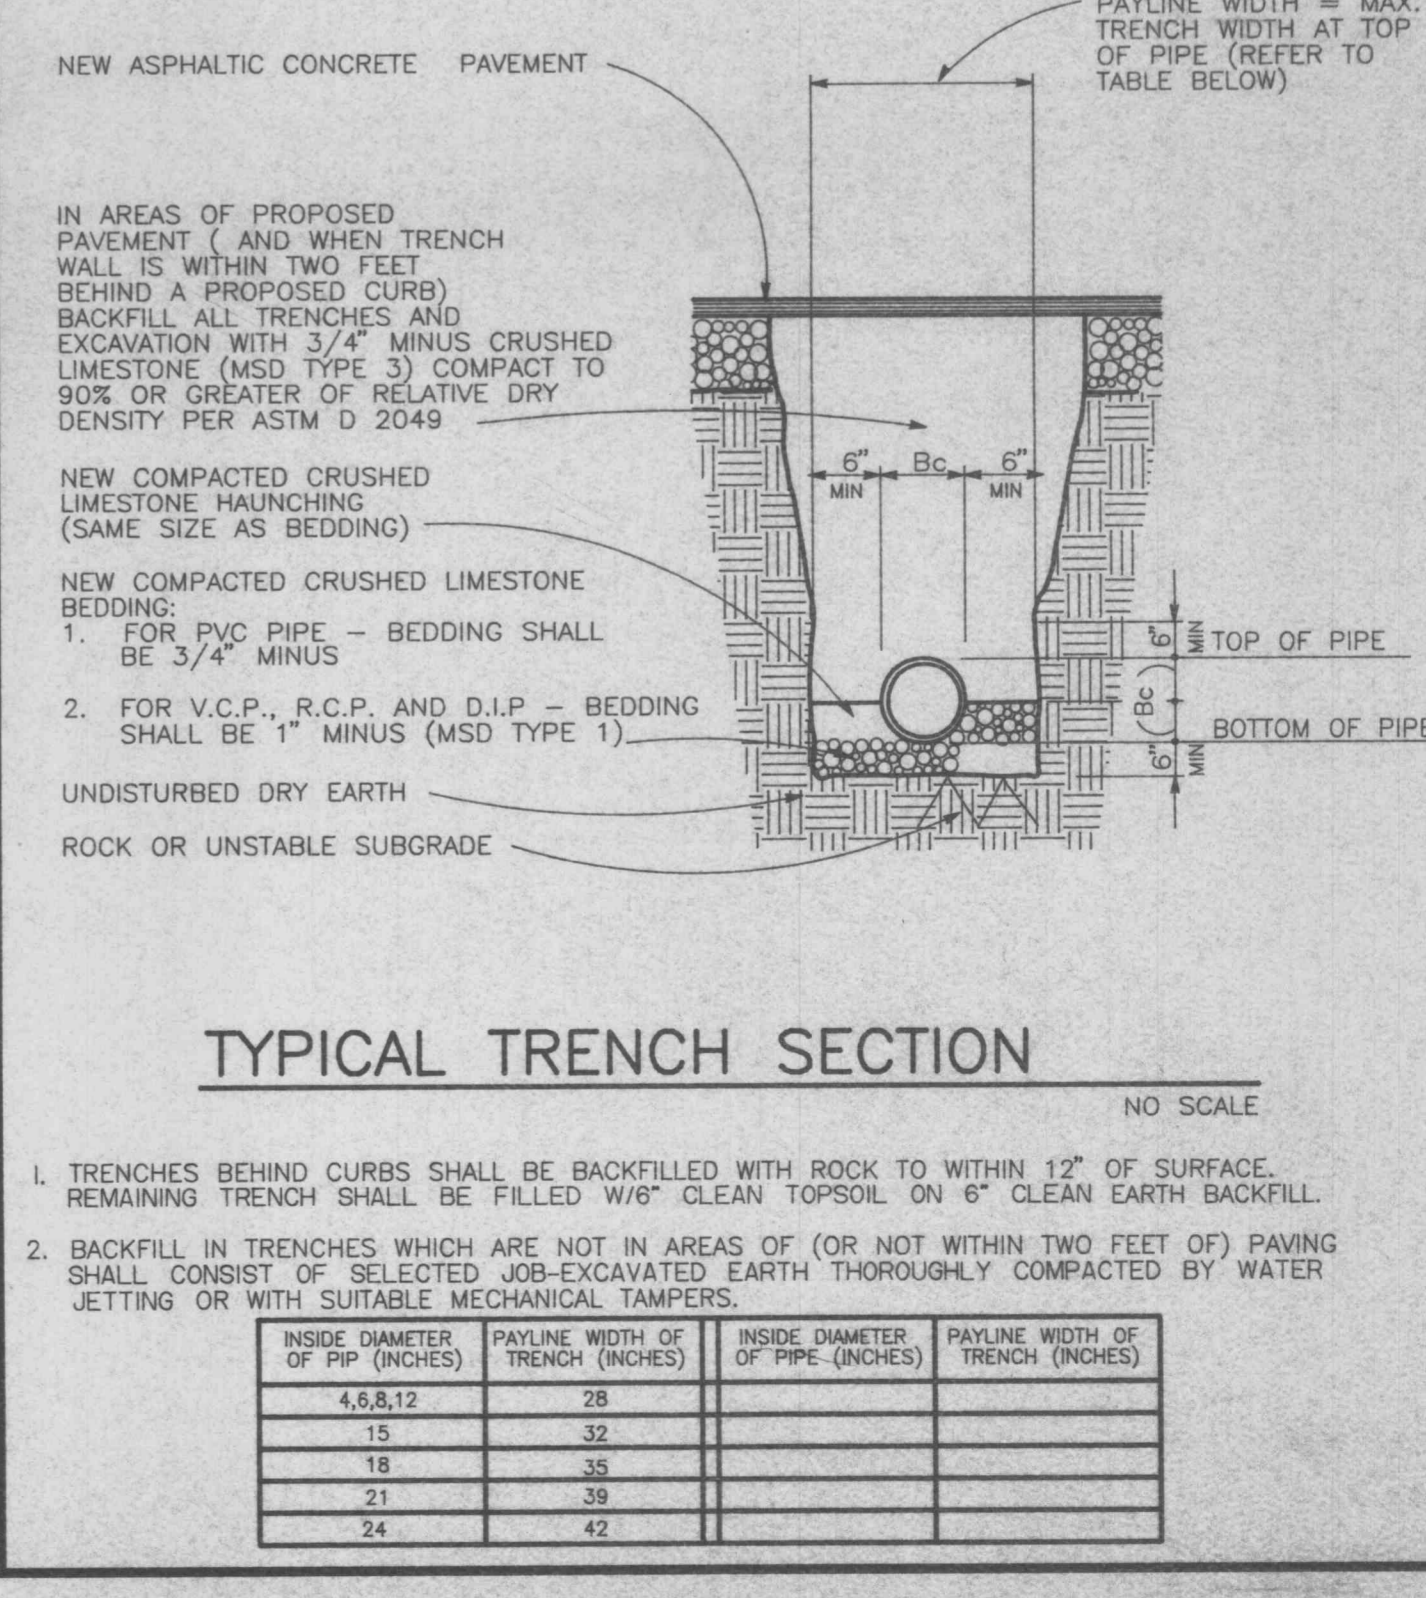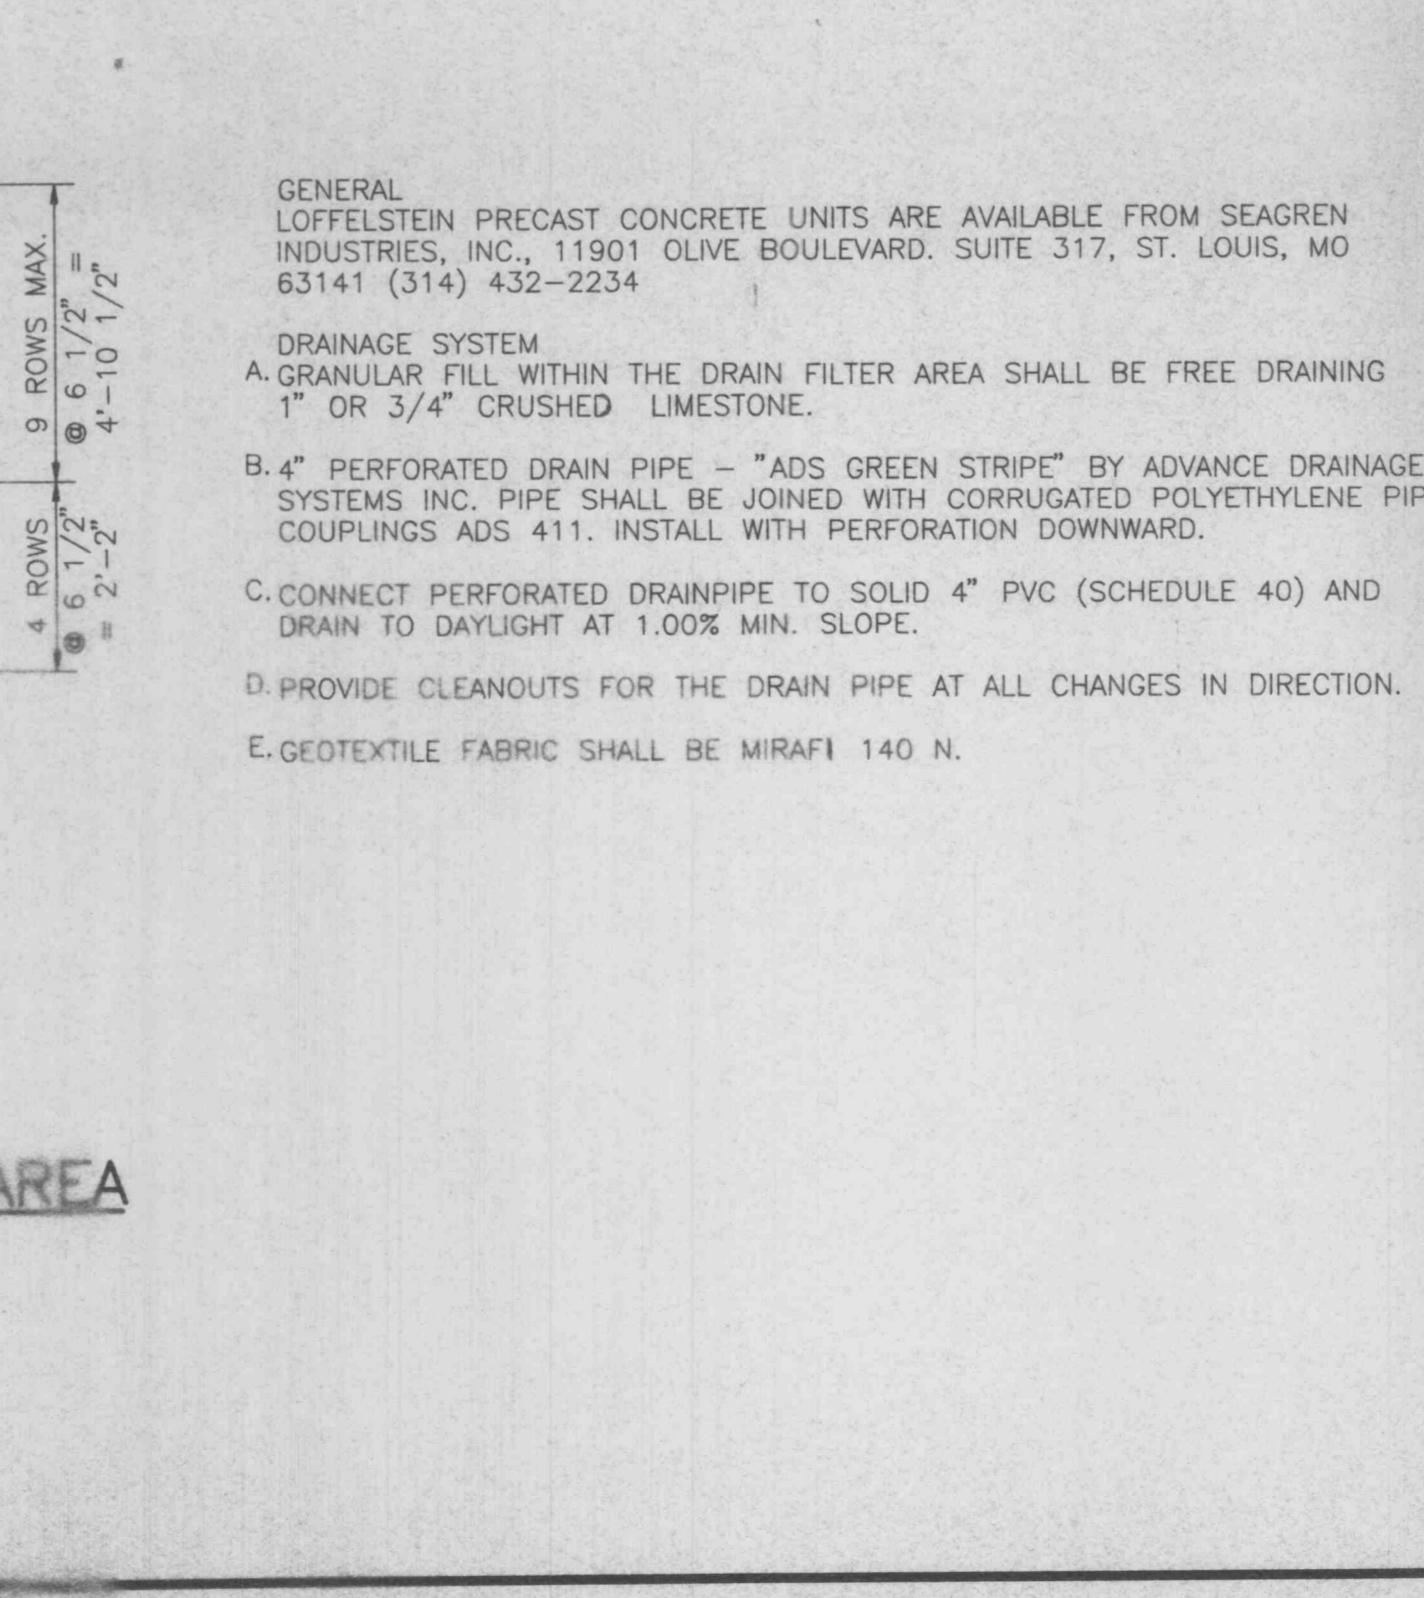

**TYPICAL TRENCH SECTION**  
NO SCALE

1. TRENCHES BEHIND CURBS SHALL BE BACKFILLED WITH ROCK TO WITHIN 12" OF SURFACE. REMAINING TRENCH SHALL BE FILLED W/6" CLEAN TOPSOIL ON 6" CLEAN EARTH BACKFILL.

2. BACKFILL IN TRENCHES WHICH ARE NOT IN AREAS OF (OR NOT WITHIN TWO FEET OF) PAVING SHALL CONSIST OF SELECTED JOB-EXCAVATED EARTH THOROUGHLY COMPACTED BY WATER JETTING OR WITH SUITABLE MECHANICAL TAMPERS.

INSIDE DIAMETER OF PIPE (INCHES)	PAYLINE WIDTH OF TRENCH (INCHES)	INSIDE DIAMETER OF PIPE (INCHES)	PAYLINE WIDTH OF TRENCH (INCHES)
4.8, 6.12	28	12	32
18	38	21	39
24	42		

REVISIONS

NO.	DATE	DESCRIPTION

**PHOTOGRAPHIC STUDIO WAREHOUSE**  
VENTURE STORES INCORPORATED  
#1835 EAST TERRA  
CITY OF O'FALLON, MISSOURI

**Farnsworth Reinhardt Polk, Inc.**

architects & engineers  
144 W. Lockwood Ave.  
St. Louis, Mo. 63119  
Phone: (314)962-7900  
Fax: (314)962-1253

TITLE: SITE DETAILS  
DATE: 9-18-92  
PROJECT NO: 92106.1

SHEET: **C-4**