




INTEGRAL VERTICAL CURB

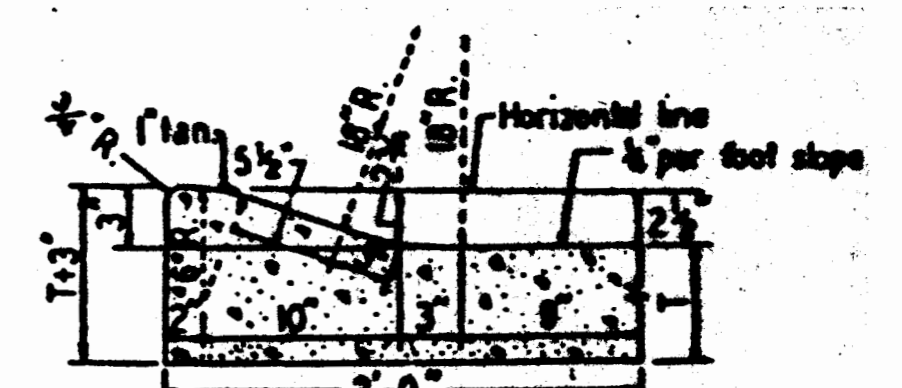


INTEGRAL ROLLED CURB

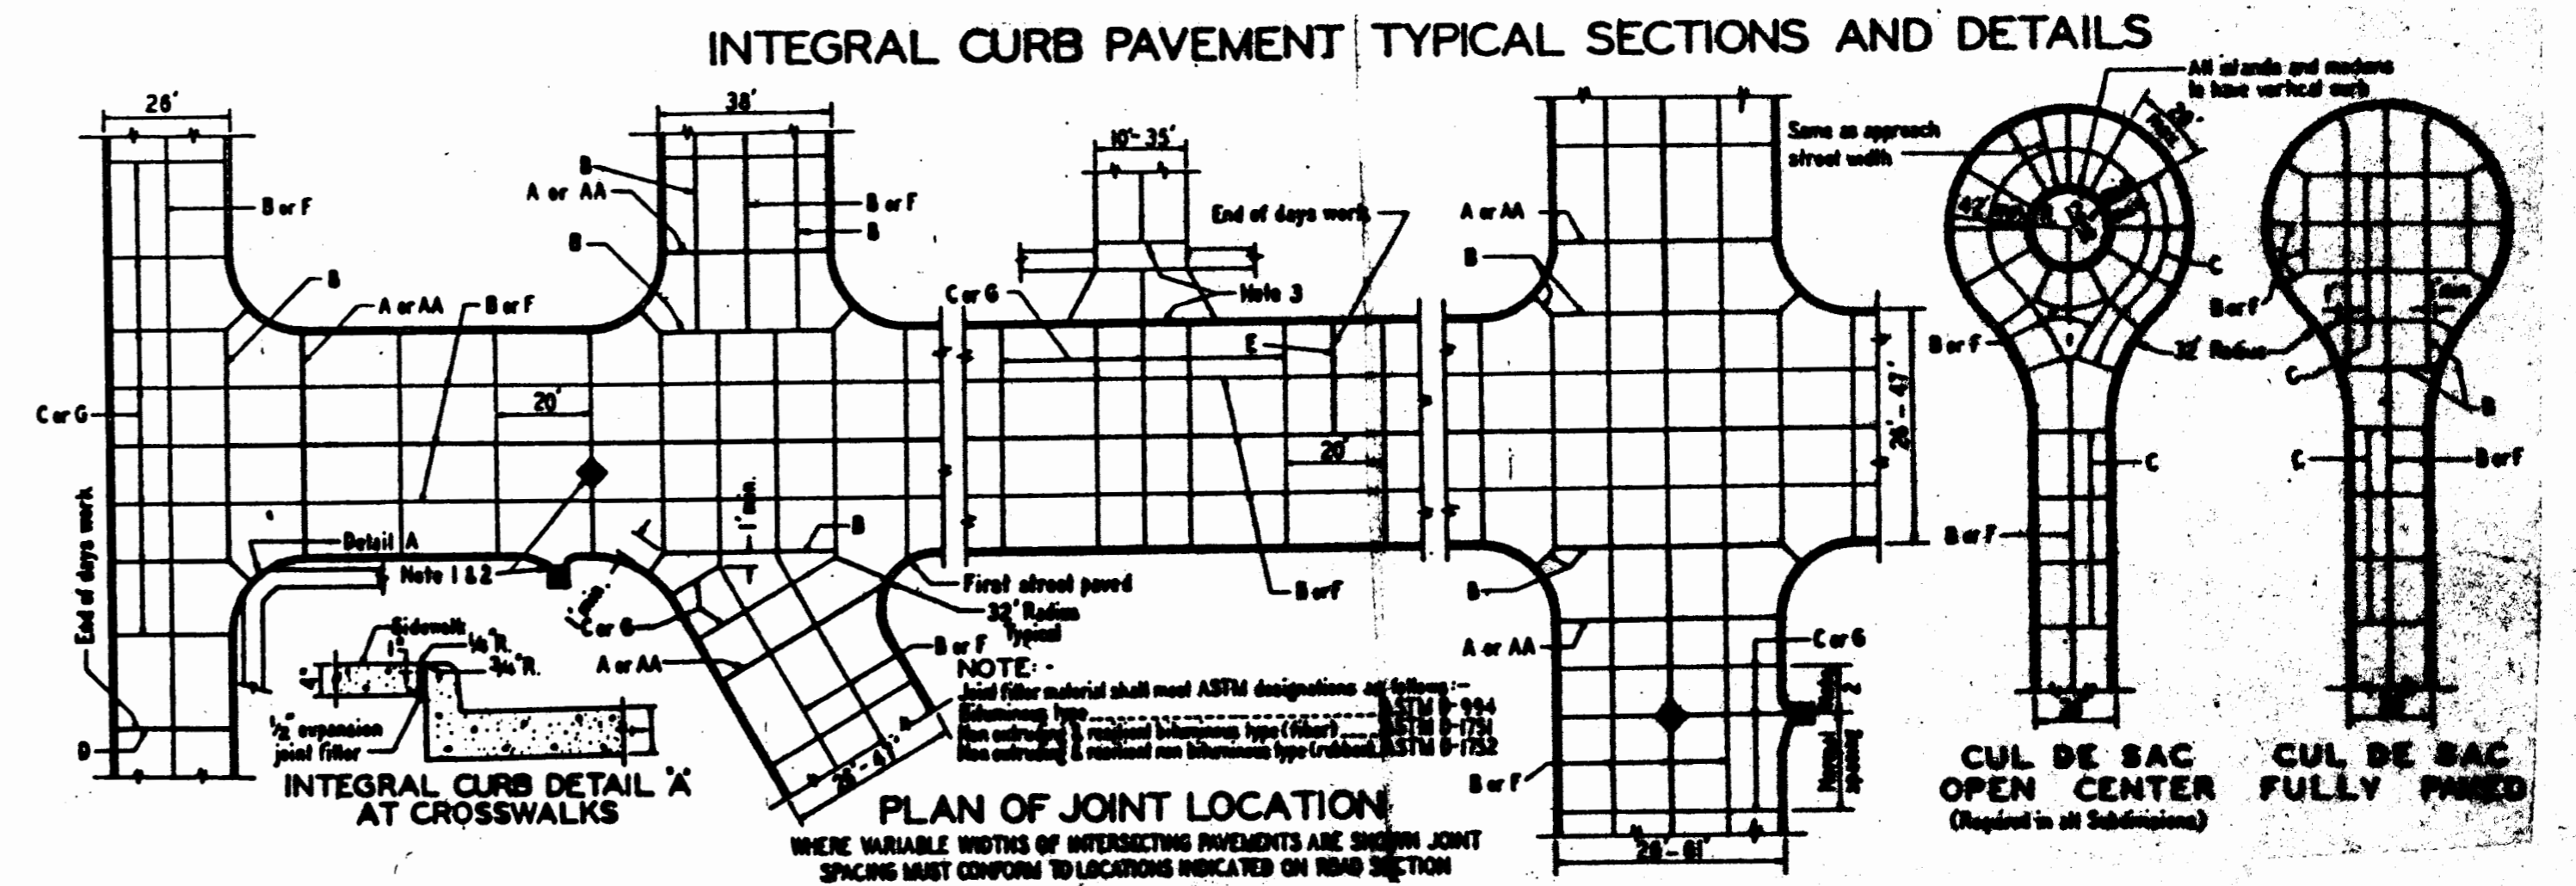

INTEGRAL CURB PAVEMENT TYPICAL SECTIONS AND DETAILS

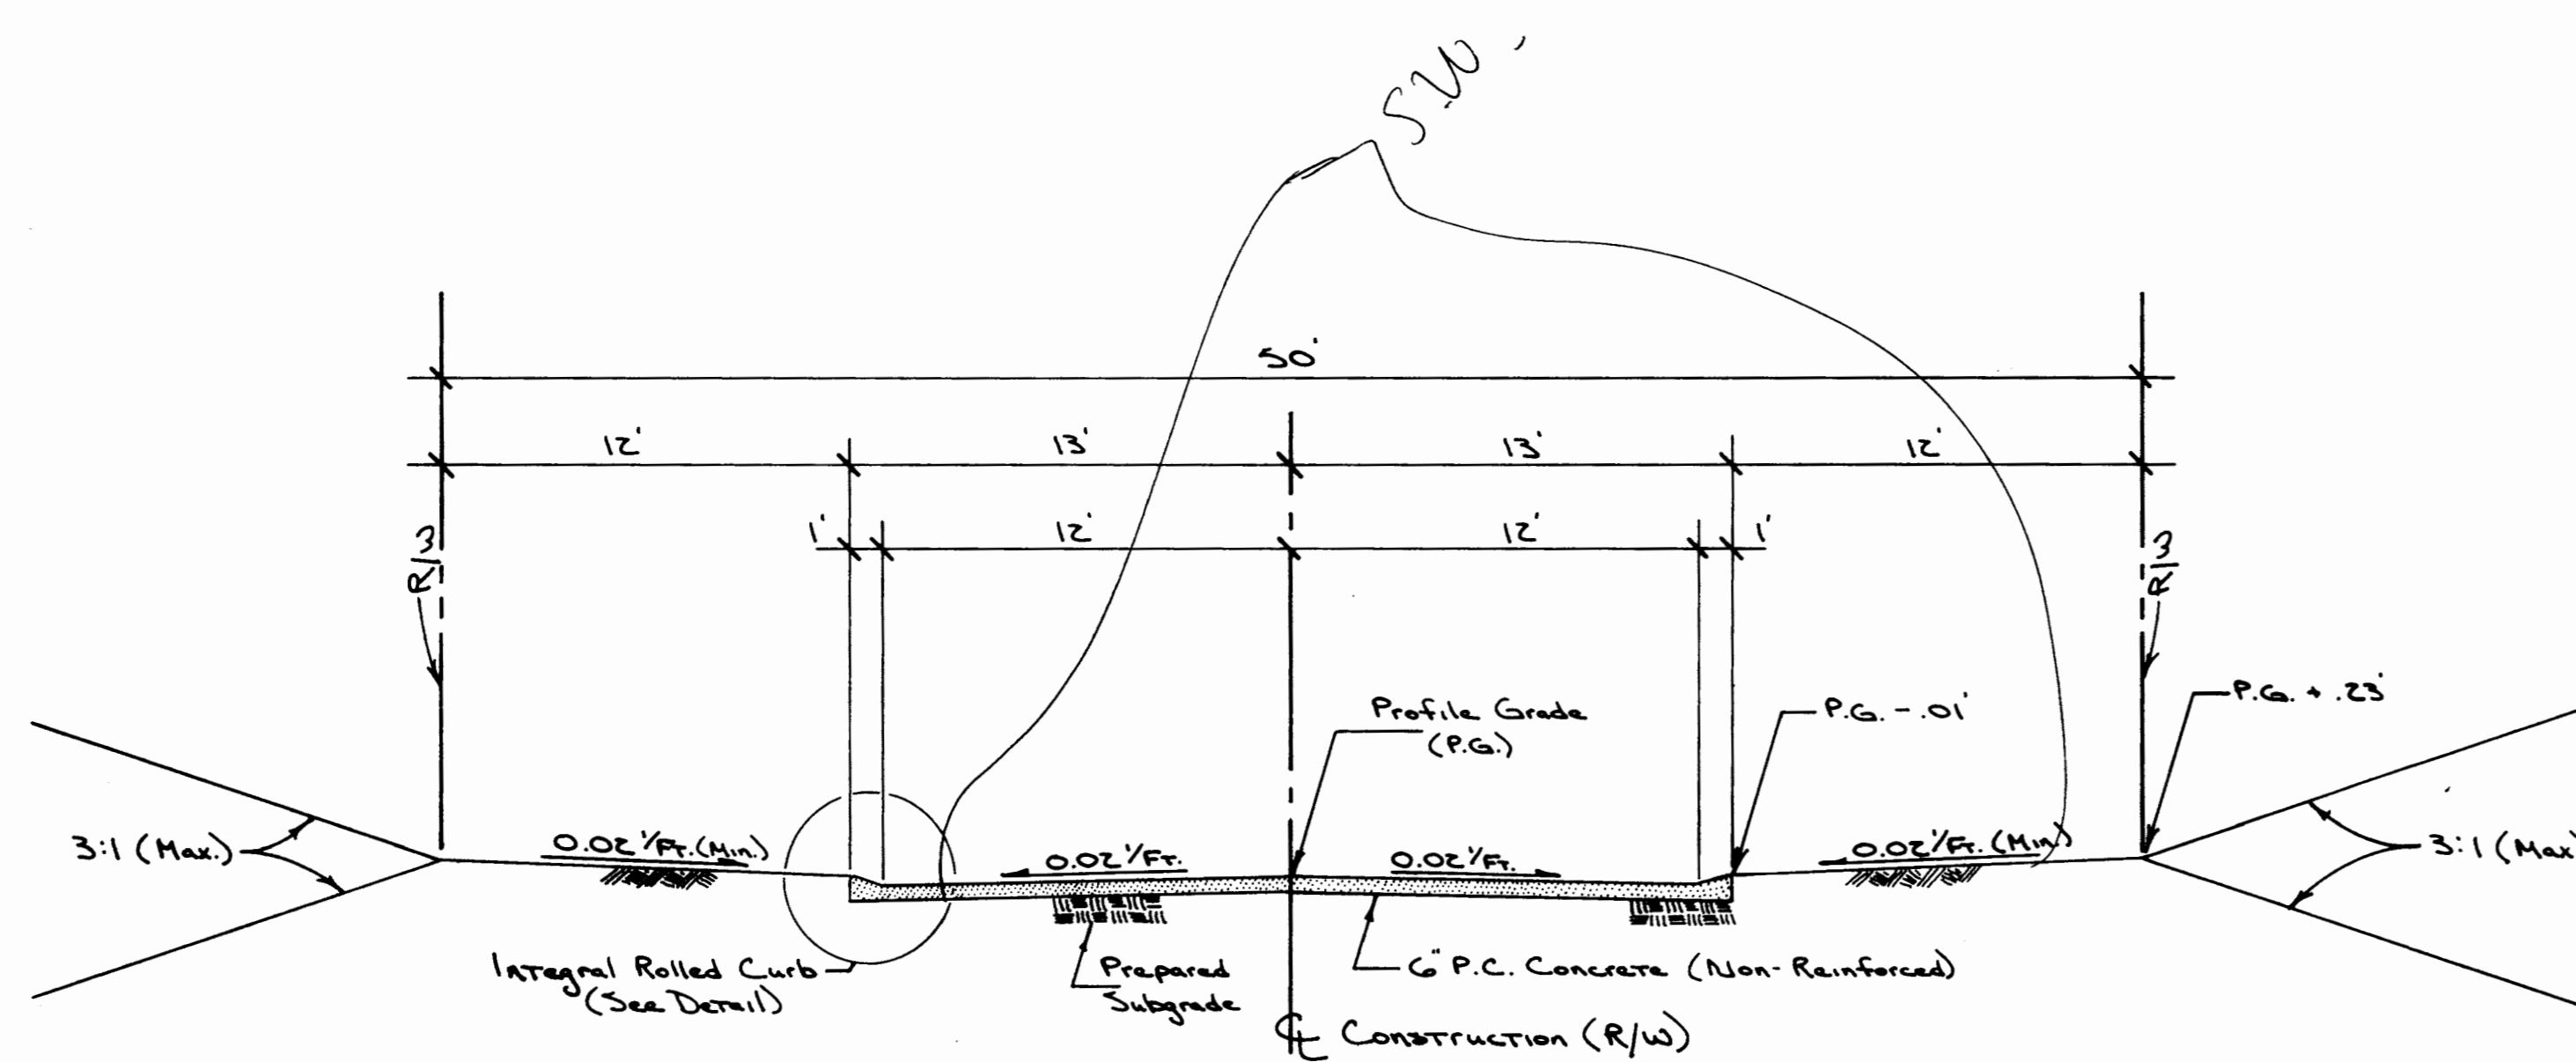

**TYPICAL SECTION**  
 (26" W. P.C. CONC. PVMT.)

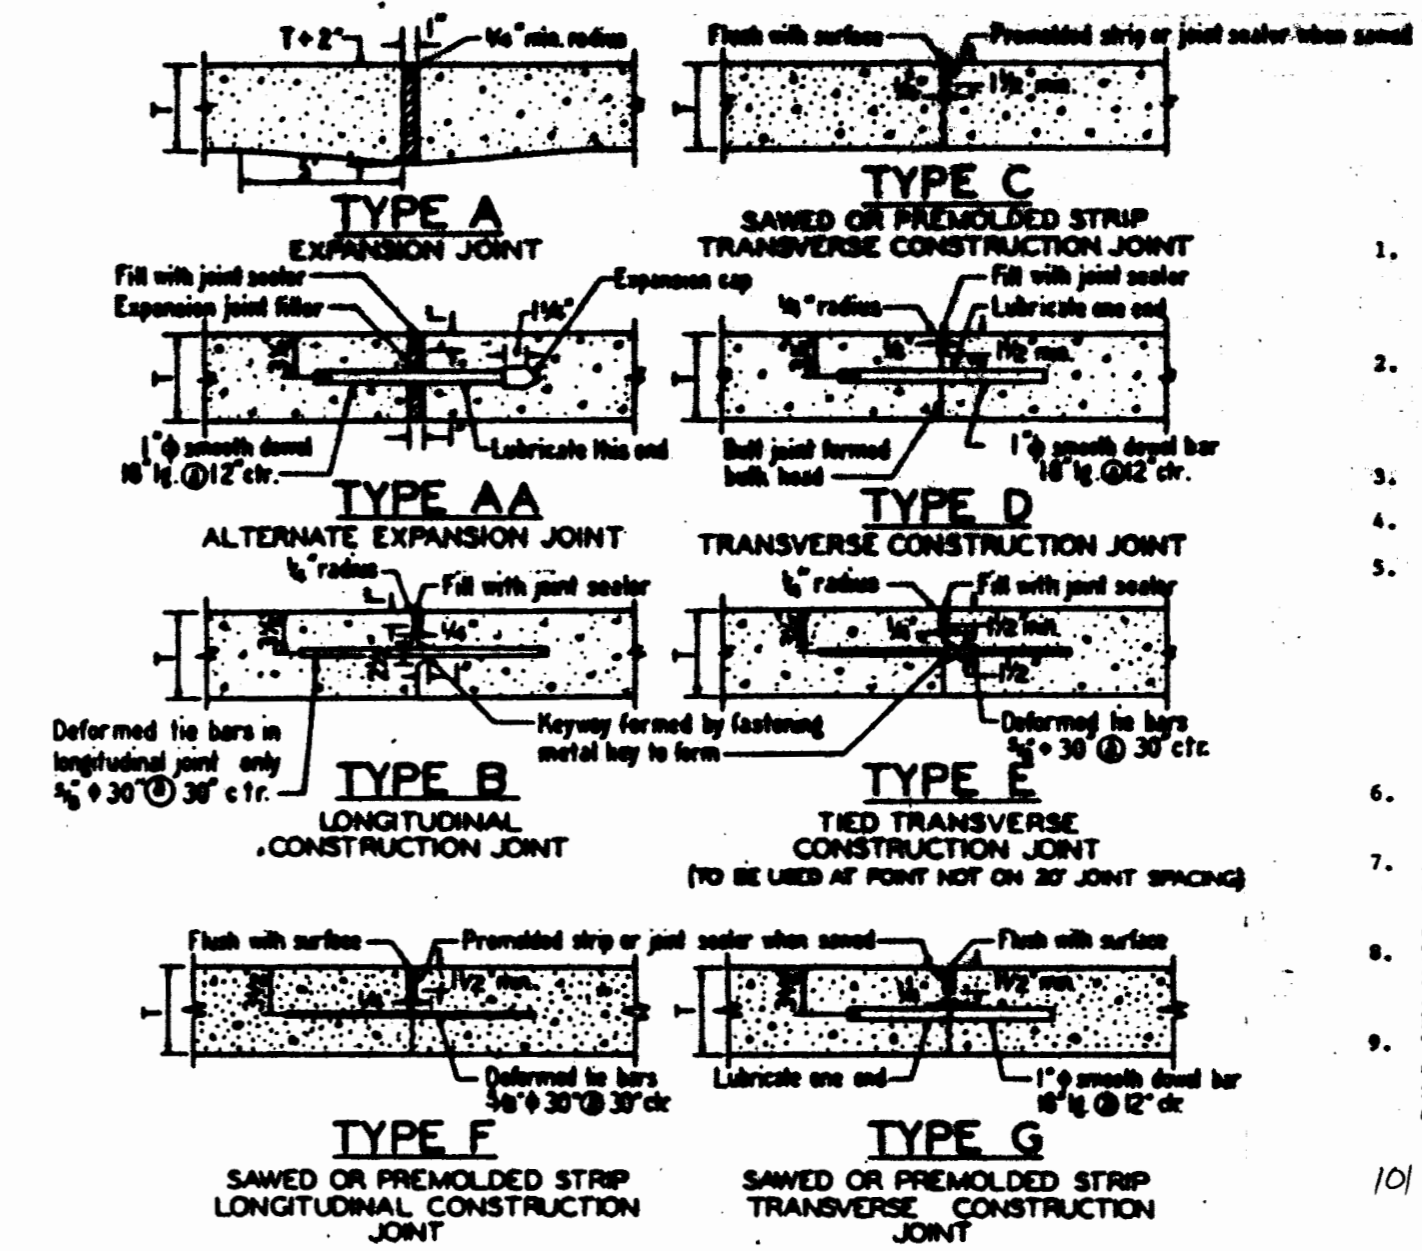

- MINIMUM SPACING**
- |                                |    |
|--------------------------------|----|
| Local or Minor Streets         | 5' |
| Major or Industrial Streets    | 7' |
| Arterial or Industrial Streets | 8' |
- Note: Base material under pavement will be made with 4 inches of Rolled Stone Base.
- All trench basins shall be separate from the pavement and curb by expansion joint material extending completely through curb and shall be made separate within the pavement limits shall be shown in the "General Construction Details".
  - When a joint falls within 3 ft. of any curb, gutter, manhole, or other structure, either side or both sides of the joint shall be rounded structures and at or between corners of rectangular structures.
  - Driveway configurations are shown in the "Driveway Construction Details".
  - Construction joint and deval bars may be omitted when curb is poured integral with pavement.
  - Minimum thickness for pavement is:
- 101 ST. CHARLES CO. PAVING SPEC. SHALL APPLY