


LIGHT POLE BASE SHALL BE AS SHOWN AND SHALL EXTEND THROUGH A MINIMUM OF 2 LAYERS OF GEOGRID. 2. IF LIGHT POLE BASE IS CLOSER THAN 2'-O" TO BACK FACE OF WALL, IT SHALL BE DESIGNED SUCH THAT IT DOES NOT IMPOSE ANY LATERAL LOAD ON RETAINING WALL.

INSTALLATION NOTES:

TYP LIGHT POLE FOUNDATION AT WALL

* TYPICAL CONCAVE CORNER DETAIL

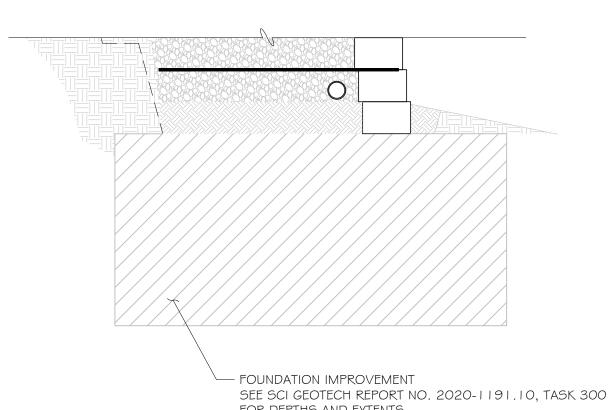


FOR DEPTHS AND EXTENTS FOUNDATION IMPROVEMENT DETAIL

TRUCTURAL DESIGN HEREIN REPRESENTS A FINISHED STRUCTURE. HE GENERAL CONTRACTOR/OWNER SHALL PROVIDE ALL INTERIM BRACING, SHORING, INTERIM DRAINAGE PROVISIONS, DRAINAGE DIVERSION AND EROSION PROTECTION REQUIRED UNTIL FINAL CAPPING, PAVING, CURBING AND COMPLETION OF FINAL STORM DRAIN SYSTEM IS COMPLETE.



RETAINING WALL

DETAILS DESIGNED:



DESIGN ENGINEER: JWh REVIEWED: 7-12-2 JOB NO.: 21-0530