

ACCESSIBLE PARKING SIGN

(n.t.s.)


24"x48" TRUNCATED DOME DETECTABLE WARNING SURFACE. MEETING CURRENT ADA REG. 12:1 SLOPE (MAX.) / SECTION B-B HANDICAP RAMP DETAIL

(n.t.s.)


DETAIL B DETECTABLE WARNING SURFACES SHALL CONTRAST VISUALLY WITH ADJACENT WALKING SURFACES. TRUNCATED DOMES SPACING

DETECTABLE WARNING AT SIDEWALK RAMPS

(n.t.s.)

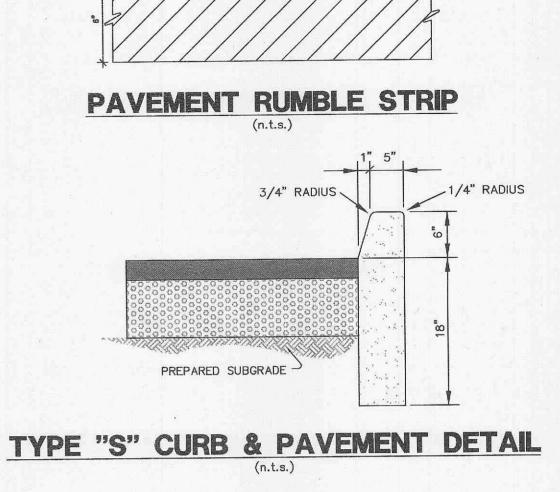


- TOOLED JOINT

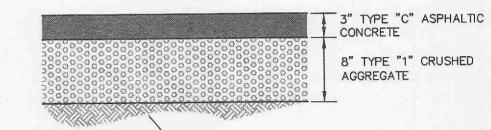

PREPARED SUBGRADE STANDARD - ASPHALT PAVEMENT DETAIL


> CONTRACTOR TO FOLLOW MoDOT'S LATEST SPECIFICATIONS FOR QUALITY ASSURANCE AND MATERIALS FOR PAVEMENT

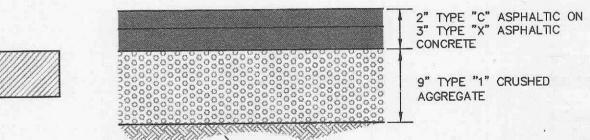

PREPARED SUBGRADE HEAVY - ASPHALT PAVEMENT DETAIL




CONCRETE PAVEMENT DETAIL

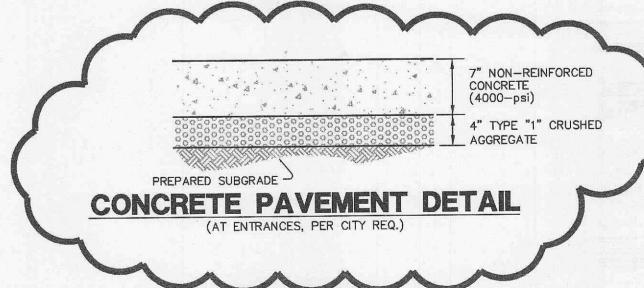

2 REVISIONS 7/29/05 PER CITY OF O'FALLON COMMENT LETTER 6/16/05 BID PACKAGE #6 6/6/05 BUILDING PERMIT APPLICATION SET 1 REVISIONS 5/18/05 PER CITY OF O'FALLON COMMENT LETTER


PROGRESS WEST

GEOMETRIC DETAILS




Consulting Engineers, Inc.

257 Chesterfield Business Parkway St. Lauis, MO 63005 PH. (636) 530-9100 FAX (636) 530-9130 e-mail: general@stockassoc.com Web: www.stockassoc.com

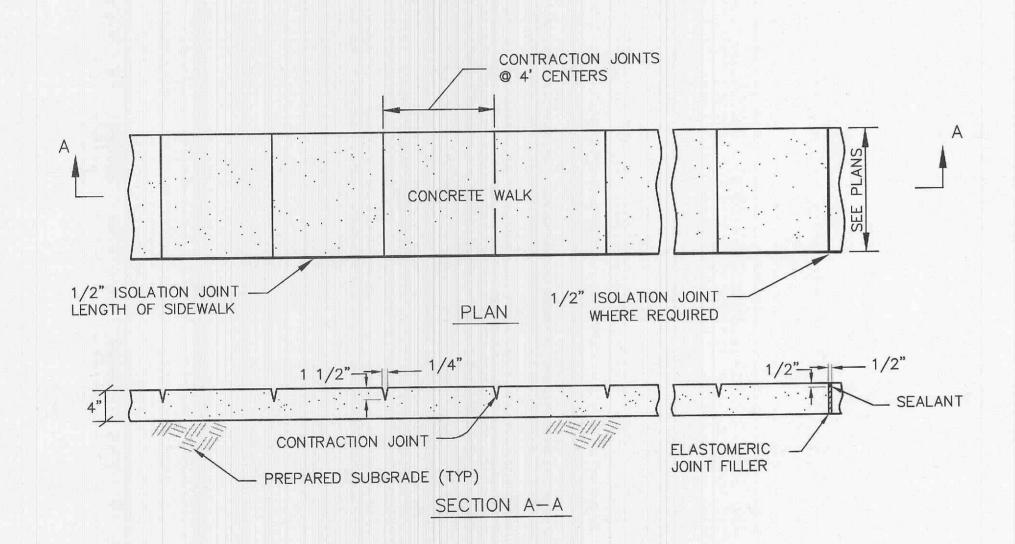

CONCRETE WALK

(n.t.s.)

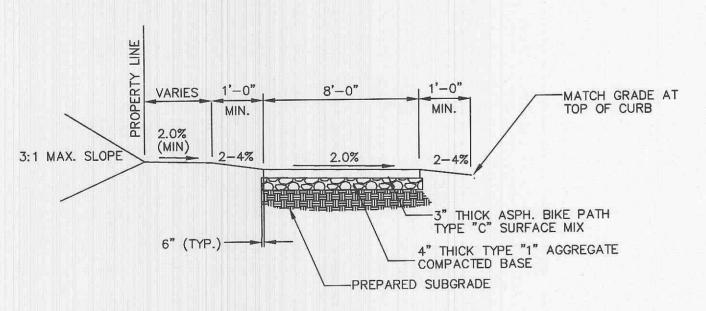

PROVIDE CONCRETE HANDICAP RAMP WHERE TRAIL INTERSECTS ACCESS DRIVES OR STREETS OR WHERE TRAIL INTERSECTS WITH CURBING (SEE PLAN).


PROVIDE STRIPING OR A COLORED TEXTURED PAVEMENT THROUGH THE ACCESS DRIVES OR STREETS INTO THE DEVELOPMENT.

MAXIMUM SLOPE OF THE PATH SHALL NOT EXCEED 8% AND 2% CROSS SLOPE PER CITY OF OFALLON SPECIFICATIONS.


THE TRAIL SHALL BE CONSTRUCTED WITH A CONSISTENT SLOPE WITH VERTICAL CURVES A MINIMUM OF 50' IN LENGTH. AFTER FINAL COMPRESSION, THE SURFACE SHALL BE SMOOTH AND TRUE TO THE ESTABLISHED CROWN AND GRADE. ANY LOW OR DEFECTIVE PLACES SHALL IMMEDIATELY BE REMEDIED BY CUTTING OUT THE COURSE AT SUCH SPOTS AND REPLACING IT WITH FRESH HOT MIXTURE, WHICH SHALL BE IMMEDIATELY COMPACTED TO CONFORM WITH THE SURROUNDING AREA AND SHALL BE THOROUGHLY BONDED TO IT. THE FINISHED PAVEMENT SHALL BE SET FREE FROM DEPRESSIONS EXCEEDING ONE-EIGHTH INCH AS MEASURED WITH A TEN-FOOT STRAIGHT EDGE PARALLELING THE CENTERLINE OF THE TRAIL.

MULTI-USE PATH DETAIL

NTS

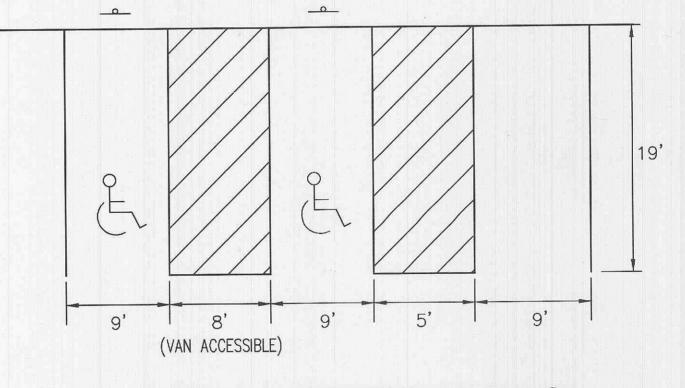

TYPICAL PARKING STALLS (n.t.s.)

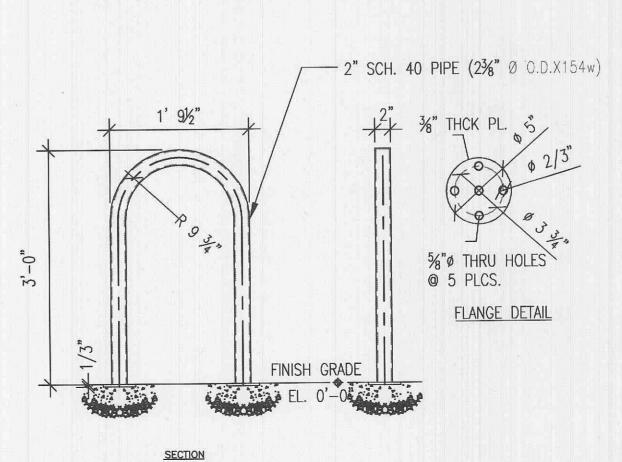

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS

BIKE RACK DETAIL

GEORGE M. STOCK E-25116 J.E.F.

G.M.S. 05.09.05 05.09.05