
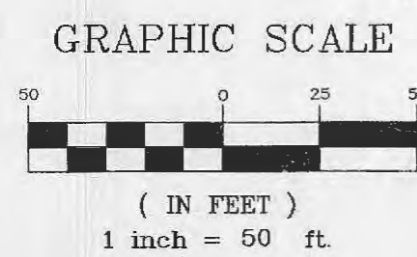


- REVISIONS:
- 09-19-06 Per City Comments
 - 10-02-06 Per MODOT
 - 10-02-06 Per Duckett Creek
 - 10-12-06 Per Client
 - 10-17-06 Per Duckett Creek
 - 11-08-06 Per Cottleville Fire

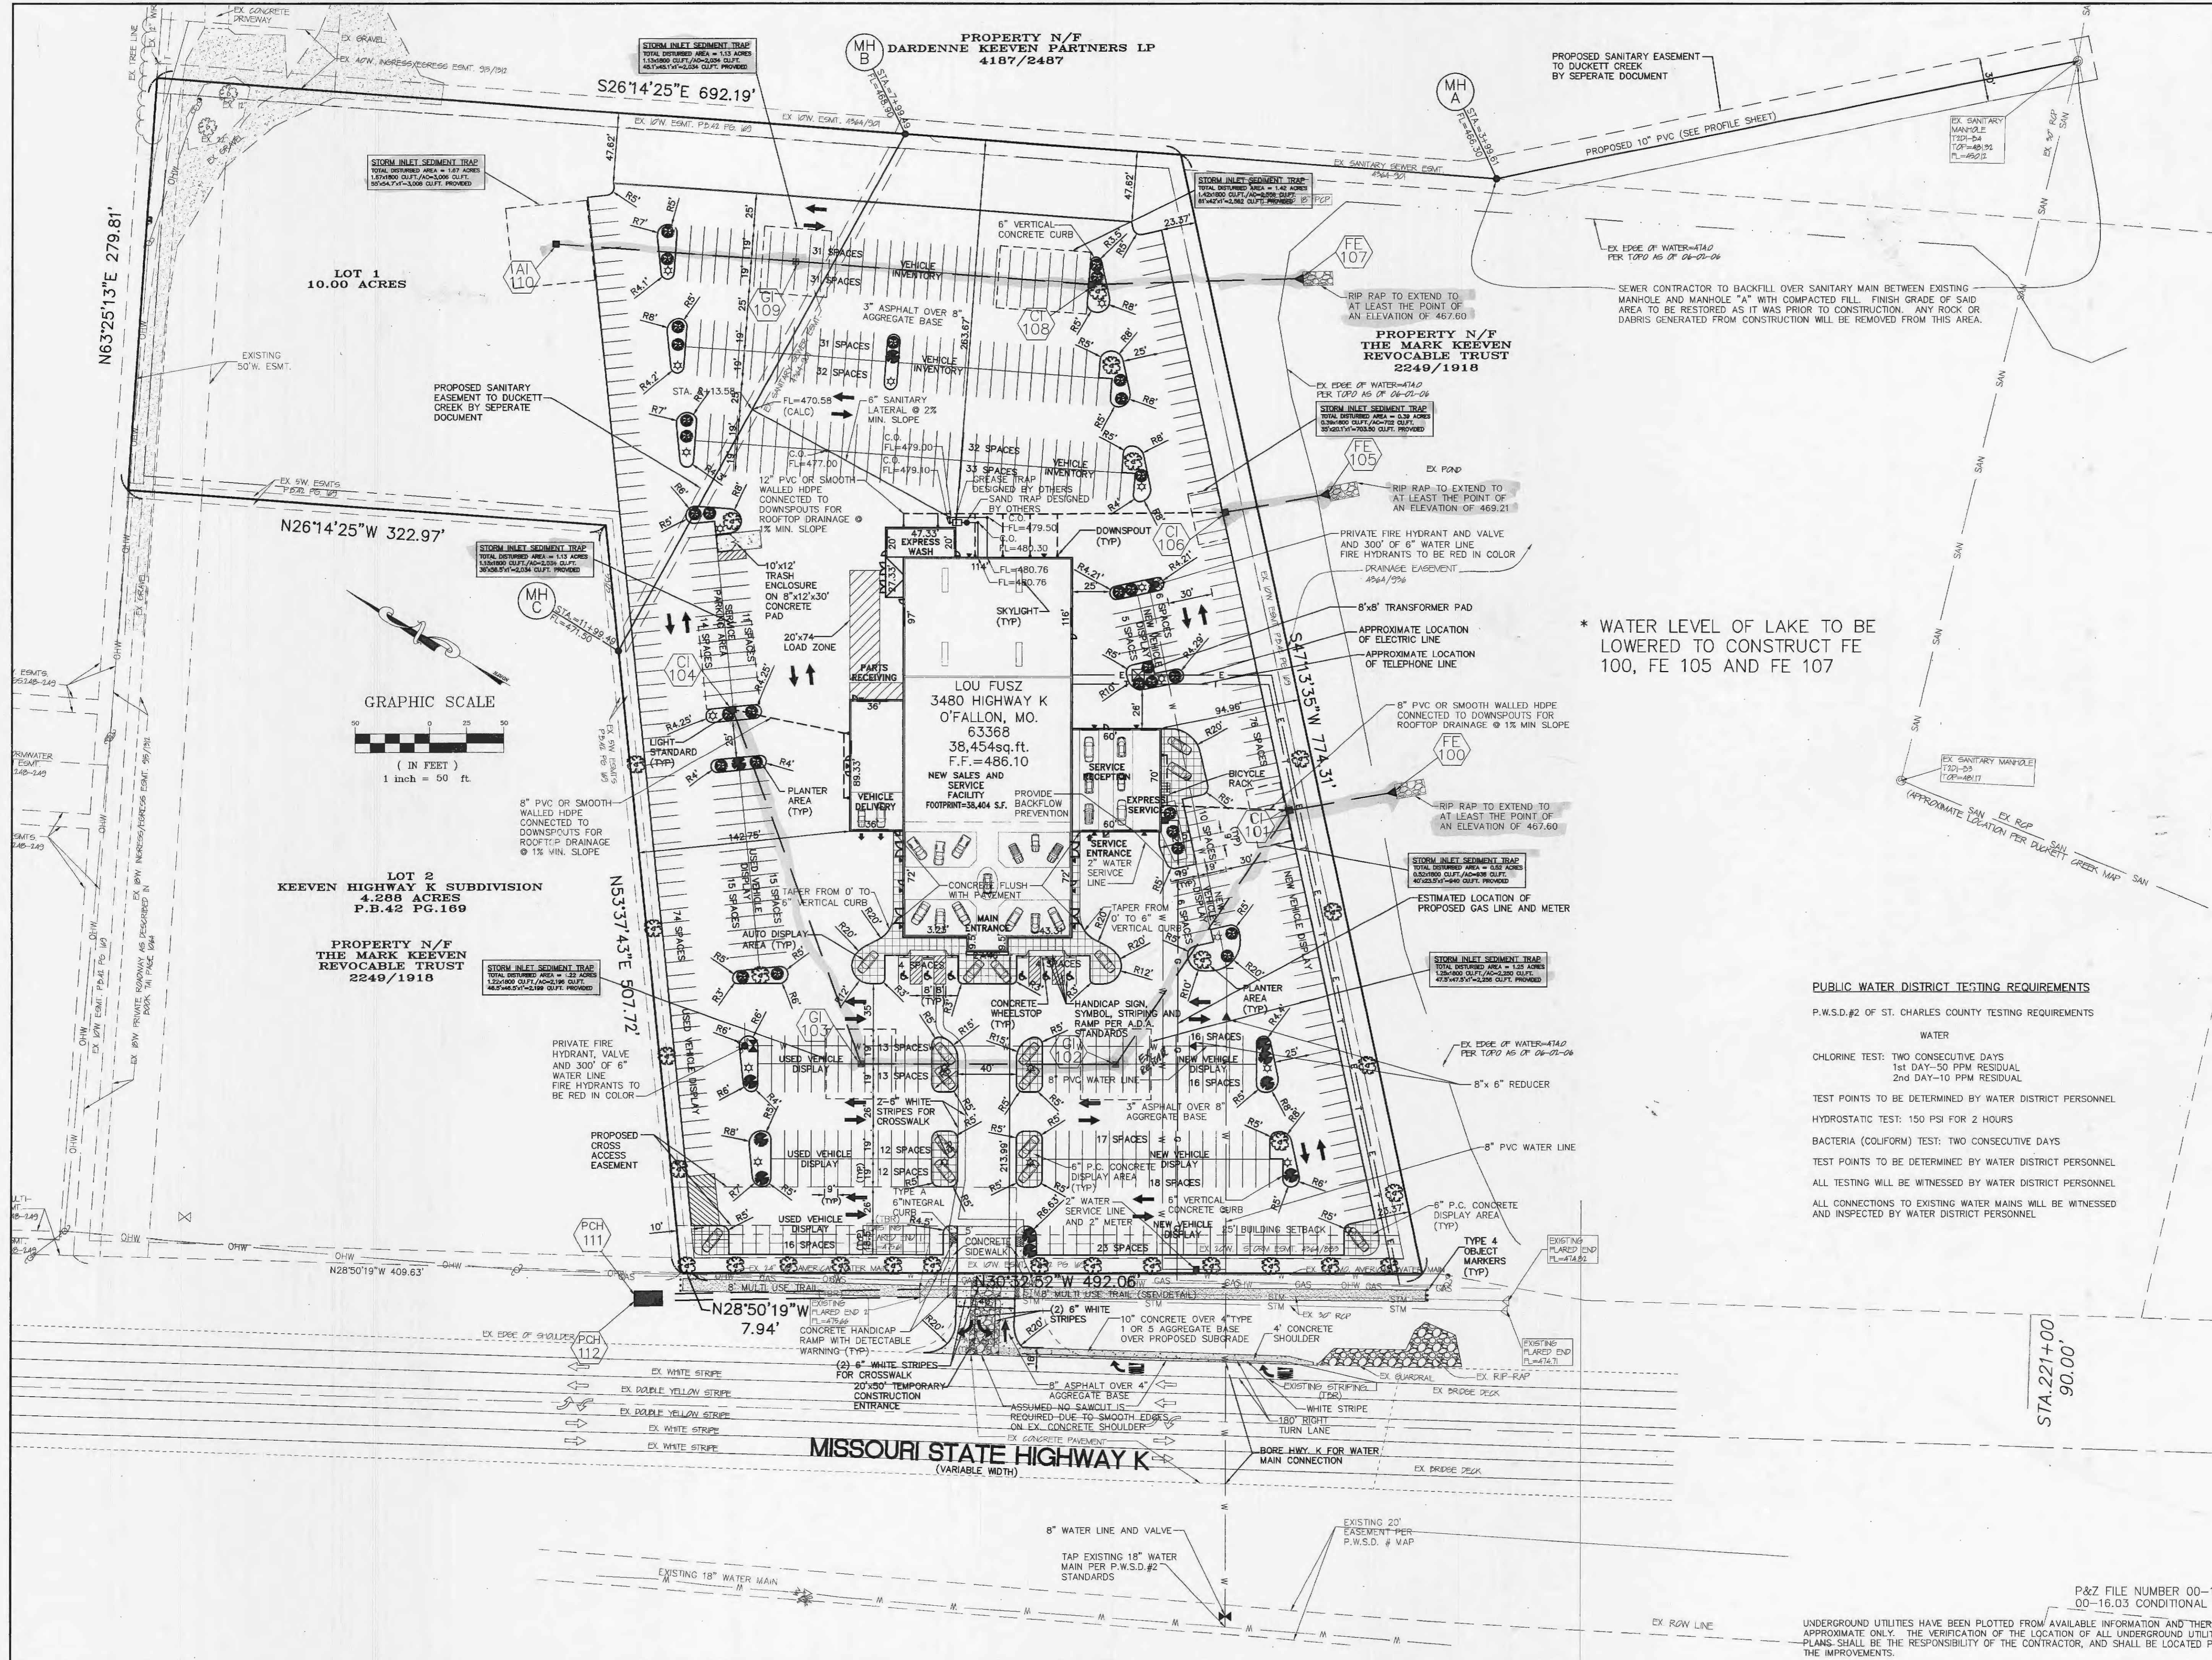

* WATER LEVEL OF LAKE TO BE LOWERED TO CONSTRUCT FE 100, FE 105 AND FE 107

PUBLIC WATER DISTRICT TESTING REQUIREMENTS

P.W.S.D.#2 OF ST. CHARLES COUNTY TESTING REQUIREMENTS

WATER

CHLORINE TEST: TWO CONSECUTIVE DAYS
1st DAY-50 PPM RESIDUAL
2nd DAY-10 PPM RESIDUAL

TEST POINTS TO BE DETERMINED BY WATER DISTRICT PERSONNEL

HYDROSTATIC TEST: 150 PSI FOR 2 HOURS

BACTERIA (COLIFORM) TEST: TWO CONSECUTIVE DAYS

TEST POINTS TO BE DETERMINED BY WATER DISTRICT PERSONNEL

ALL TESTING WILL BE WITNESSED BY WATER DISTRICT PERSONNEL

ALL CONNECTIONS TO EXISTING WATER MAINS WILL BE WITNESSED AND INSPECTED BY WATER DISTRICT PERSONNEL

P&Z FILE NUMBER 00-16.04 SITE PLAN APPROVED 07-06-06
00-16.03 CONDITIONAL USE NUMBER APPROVED 07-13-06

UNDERGROUND UTILITIES HAVE BEEN PLOTTED FROM AVAILABLE INFORMATION AND THEREFORE THEIR LOCATIONS SHALL BE CONSIDERED APPROXIMATE ONLY. THE VERIFICATION OF THE LOCATION OF ALL UNDERGROUND UTILITIES, EITHER SHOWN OR NOT SHOWN ON THESE PLANS, SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, AND SHALL BE LOCATED PRIOR TO ANY GRADING OR CONSTRUCTION OF THE IMPROVEMENTS.

E:\DWG\A13500PLUS\13706-Lou Fusz\Construction\13706con.dwg, SITE(2), 11/27/2006 11:49:51 AM, Sta 35 KW