



SEE DETECTABLE WARNING PANEL DETAILS SHEET 15

Sidewalk at Back of Curb
STRAIGHT CURB RAMP - 6" VERTICAL CURB (TYPE 1)

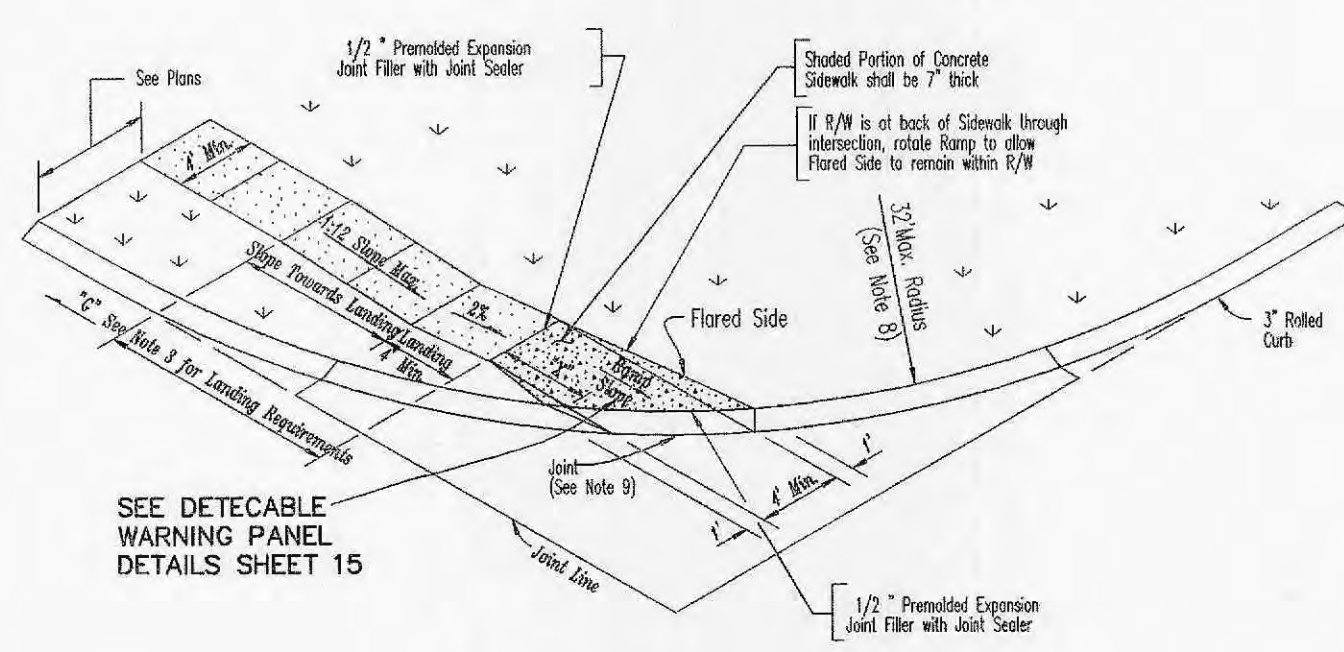

SEE DETECTABLE WARNING PANEL DETAILS SHEET 15

Treaddown at Back of Curb
STRAIGHT CURB RAMP - 3" ROLLED CURB (TYPE 3)

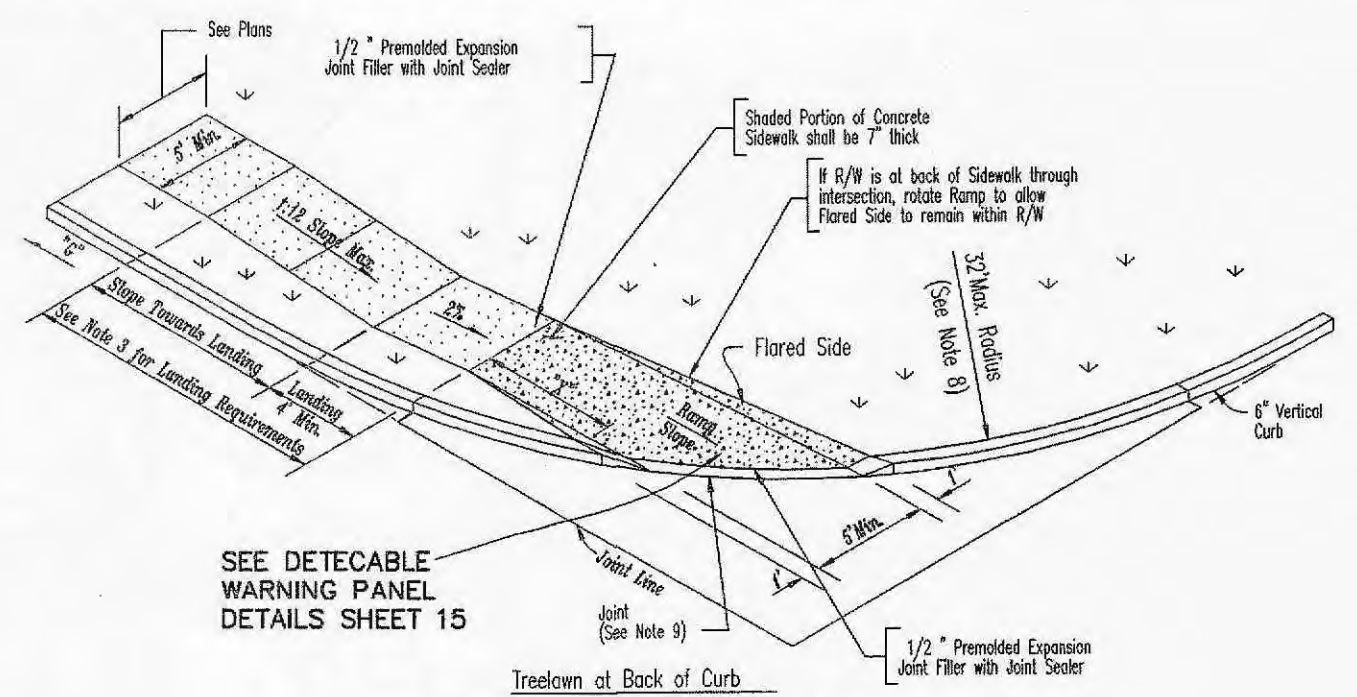

SEE DETECTABLE WARNING PANEL DETAILS SHEET 15

Treaddown at Back of Curb
STRAIGHT CURB RAMP - 6" VERTICAL CURB (TYPE 2)

TYPE 1 AND TYPE 2 CURB RAMPS	
"G" GRADE ALONG CURB (%)	MIN. LENGTH OF RAMP SLOPE (L.F.)
NEGATIVE (-) VALUES	6
0 TO +1	7
+1.01 TO +2	8
+2.01 TO +3	10
+3.01 TO +4	12
GREATER THAN +4	15

NOTE: Positive (+)"G" - Proceeding away from intersection and up a grade.
Negative (-)"G" - Proceeding away from intersection and down a grade.

TYPE 3 CURB RAMP	
"G" GRADE ALONG CURB (%)	MIN. LENGTH OF RAMP SLOPE (L.F.)
NEGATIVE (-) VALUES	3
0 TO +2	4
+2.01 TO +3	5
+3.01 TO +4	6
+4.01 TO +5	8
+5.01 TO +6	11
GREATER THAN +6	15


NOTE: Positive (+)"G" - Proceeding away from intersection and up a grade.
Negative (-)"G" - Proceeding away from intersection and down a grade.

GENERAL NOTES

- Do not scale drawing. Follow dimensions.
- Sidewalk and sidewalk curb ramps shall be constructed in accordance with these details and the current approved Americans with Disabilities Act Accessibility Guidelines (ADAAG).
- Provide a landing at the top of each straight ramp when the Grade Along Curb ("G") is greater than +2% and less than +7%. For other values of "G", including all negative (-) values, no landing is required.
- Minimum sidewalk width along 6" vertical curb shall be 3 feet. Minimum sidewalk width along 3" rolled curb shall be 4 feet.
- Maximum sidewalk cross slope 0.02'/ft.
- All sidewalk sections shall be 4" thick, except where indicated as 7" thick by shaded portions shown on details. All sidewalk sections and curb ramps, regardless of thickness, shall be paid for as Concrete Sidewalk.
- Where curb ramp meets pavement, balise will not be permitted.
- Construct a diagonal ramp when the maximum corner radius allowed for a straight ramp is exceeded.
- If monolithic concrete curb is constructed, strike a dummy joint across bottom of ramp at curb line. If concrete curb is down-slope, block out pavement to provide full depth curb across ramp from outer point of curb taper to outer point of curb taper.
- For sidewalk locations on Curb-De-Sacs, refer to "Pavement Construction Details".
- For pavement longitudinal and transverse joints and tie bar requirements and dimensions, refer to the "Pavement Construction Details for Joints and Curbs" See Div. C502.03.
- For roadway cross slopes, pavement types, and thicknesses, refer to "Standard Typical Section".
- All curb ramps shall have a detectable warning complying with "Americans with Disabilities Act Accessibility Guidelines" (ADAAG).

**PAVEMENT CONSTRUCTION DETAILS
CONCRETE SIDEWALK
AND CURB RAMPS**

DATE: June, 2002 DRAWING C608.10

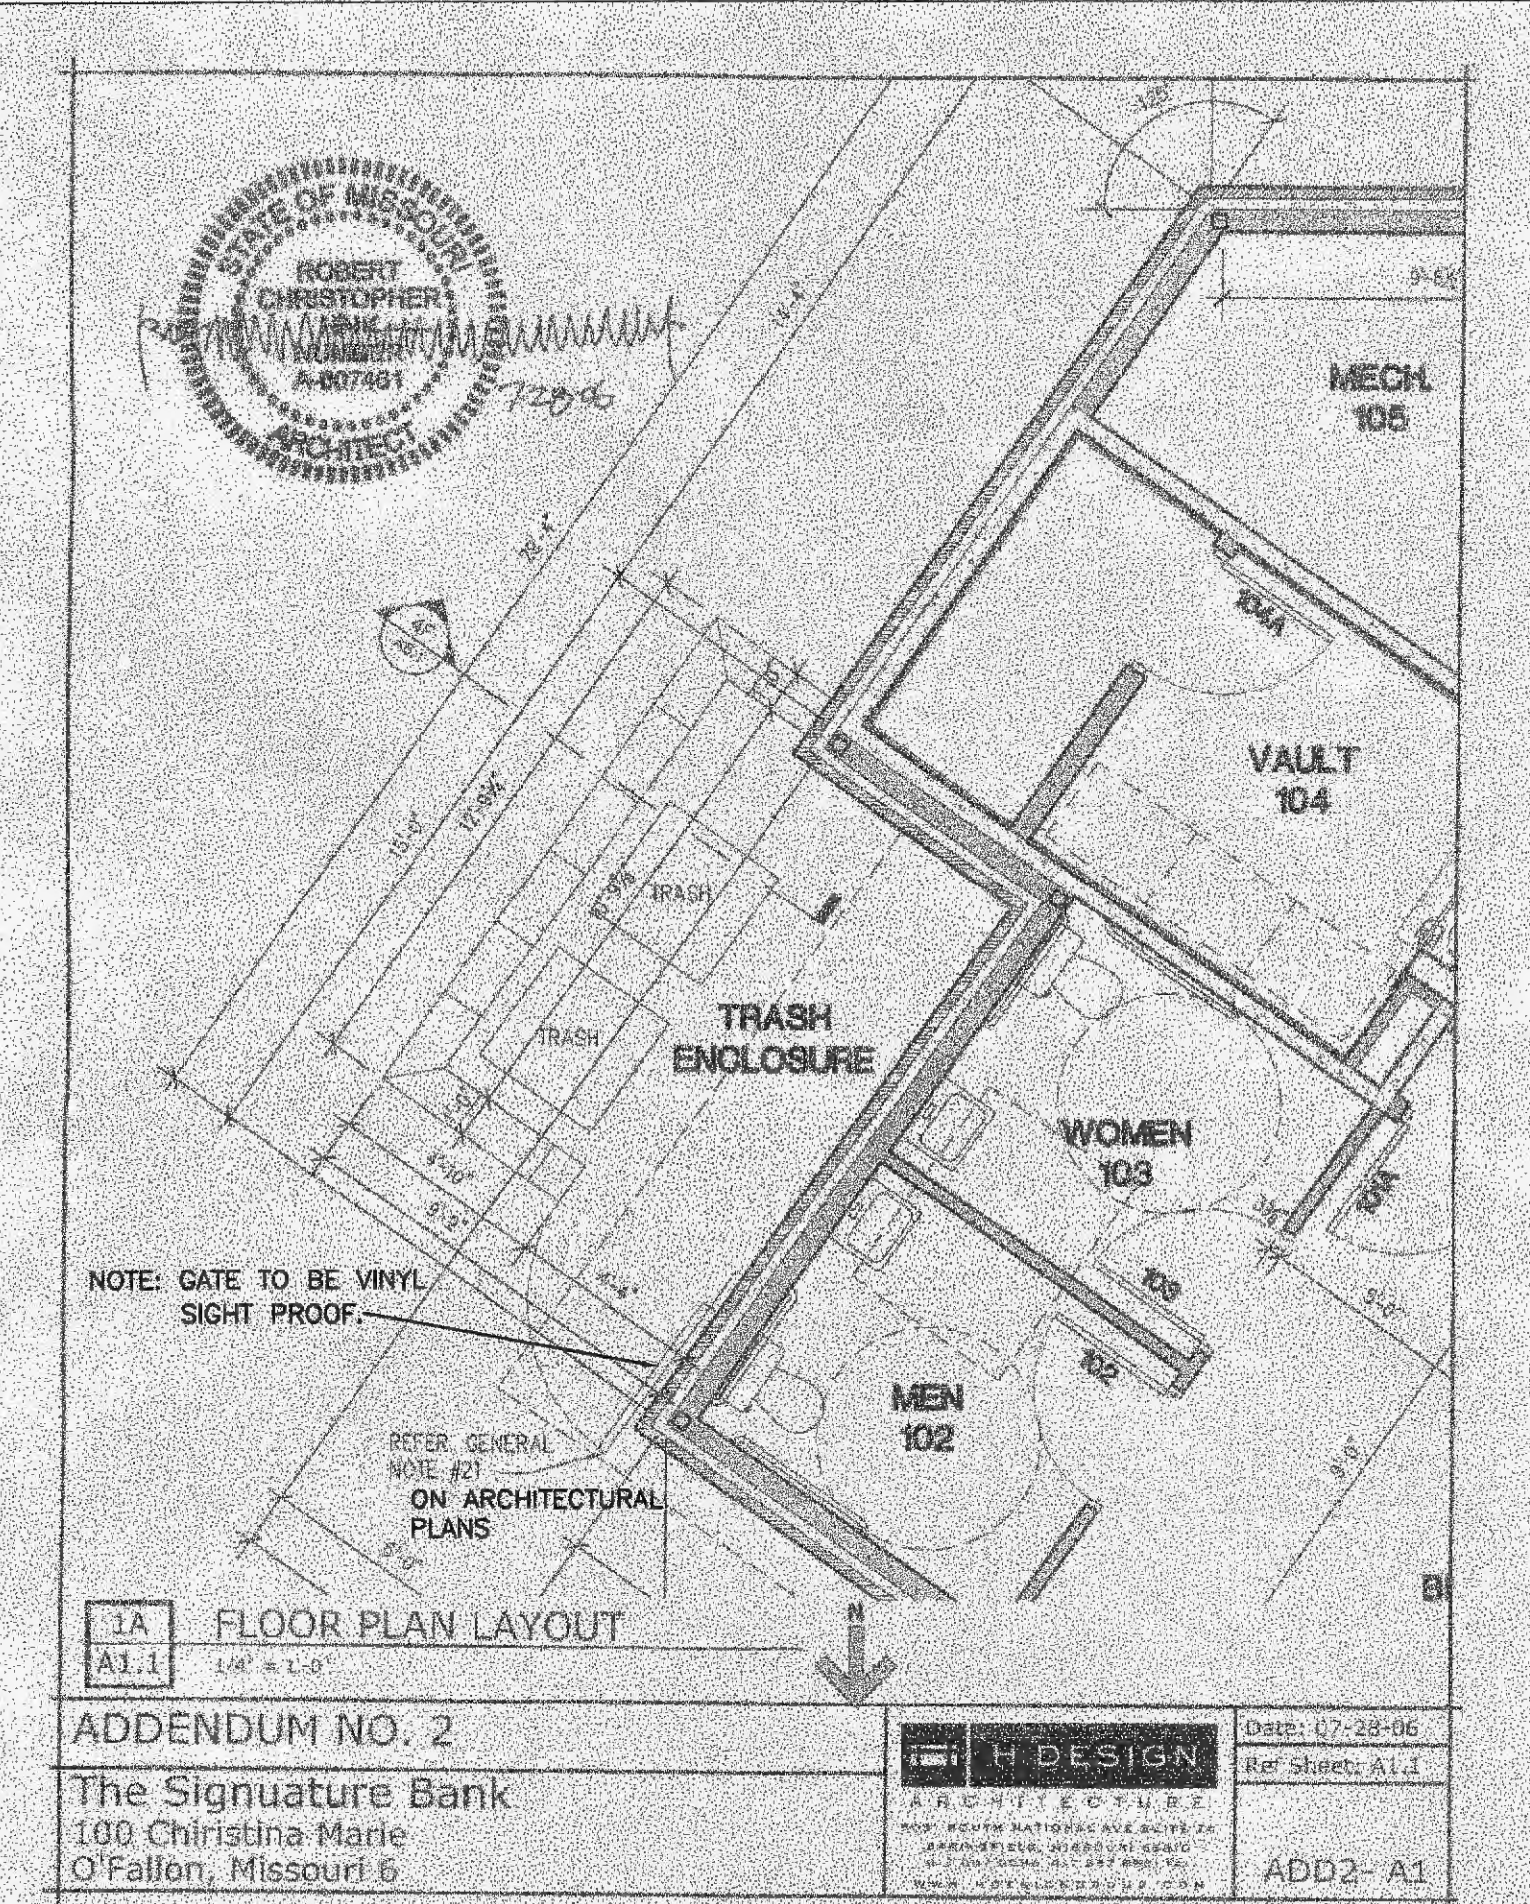


1A FLOOR PLAN LAYOUT
A1.1 1/8" = 1'-0"

ADDENDUM NO. 2
The Signature Bank
100 Christina Marie
O'Fallon, Missouri 6

H DESIGN
ARCHITECTURE
DATE: 07-28-06
REF SHEET: A1.1
ADD2-A1


ARCHITECTURAL DETAILS

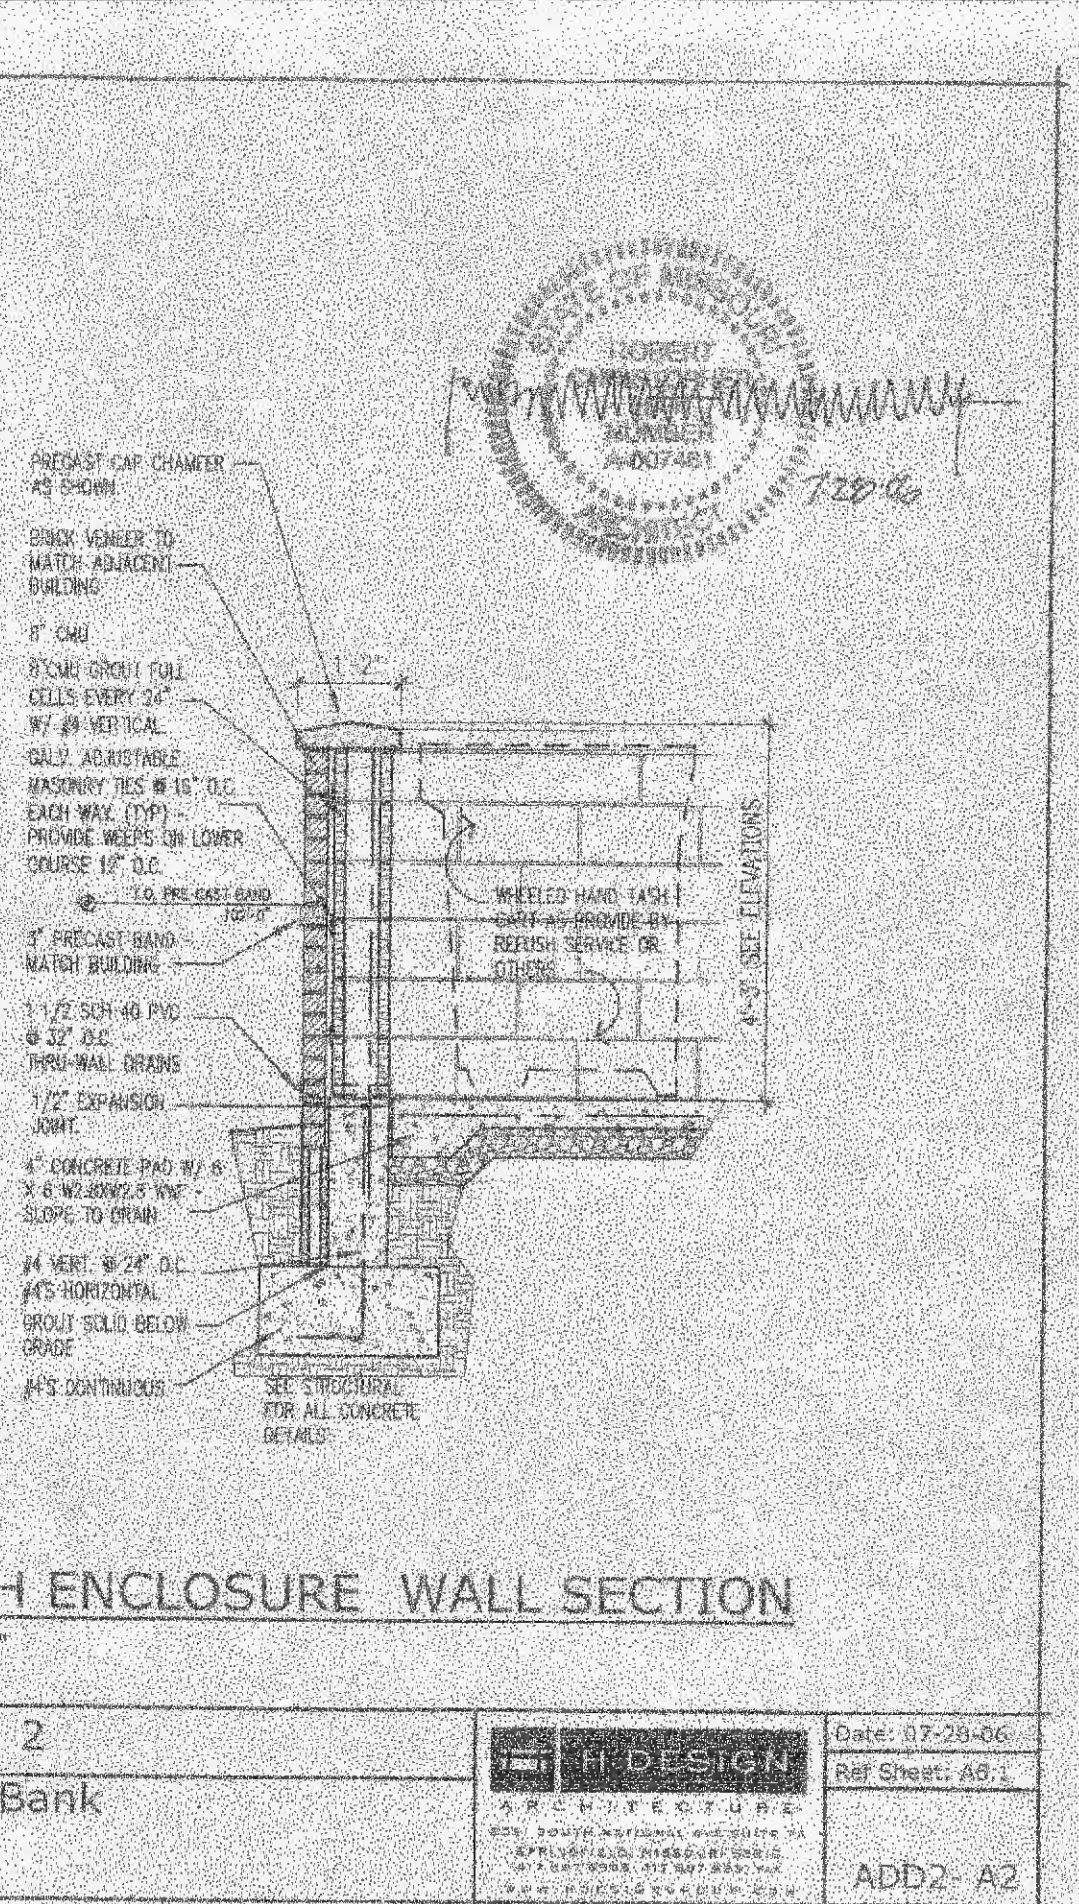

4F TRASH ENCLOSURE WALL SECTION
A6.1 1/2" = 1'-0"


ADDENDUM NO. 2
The Signature Bank
100 Christina Marie
O'Fallon, Missouri 6

H DESIGN
ARCHITECTURE
DATE: 07-28-06
REF SHEET: A6.1
ADD2-A2

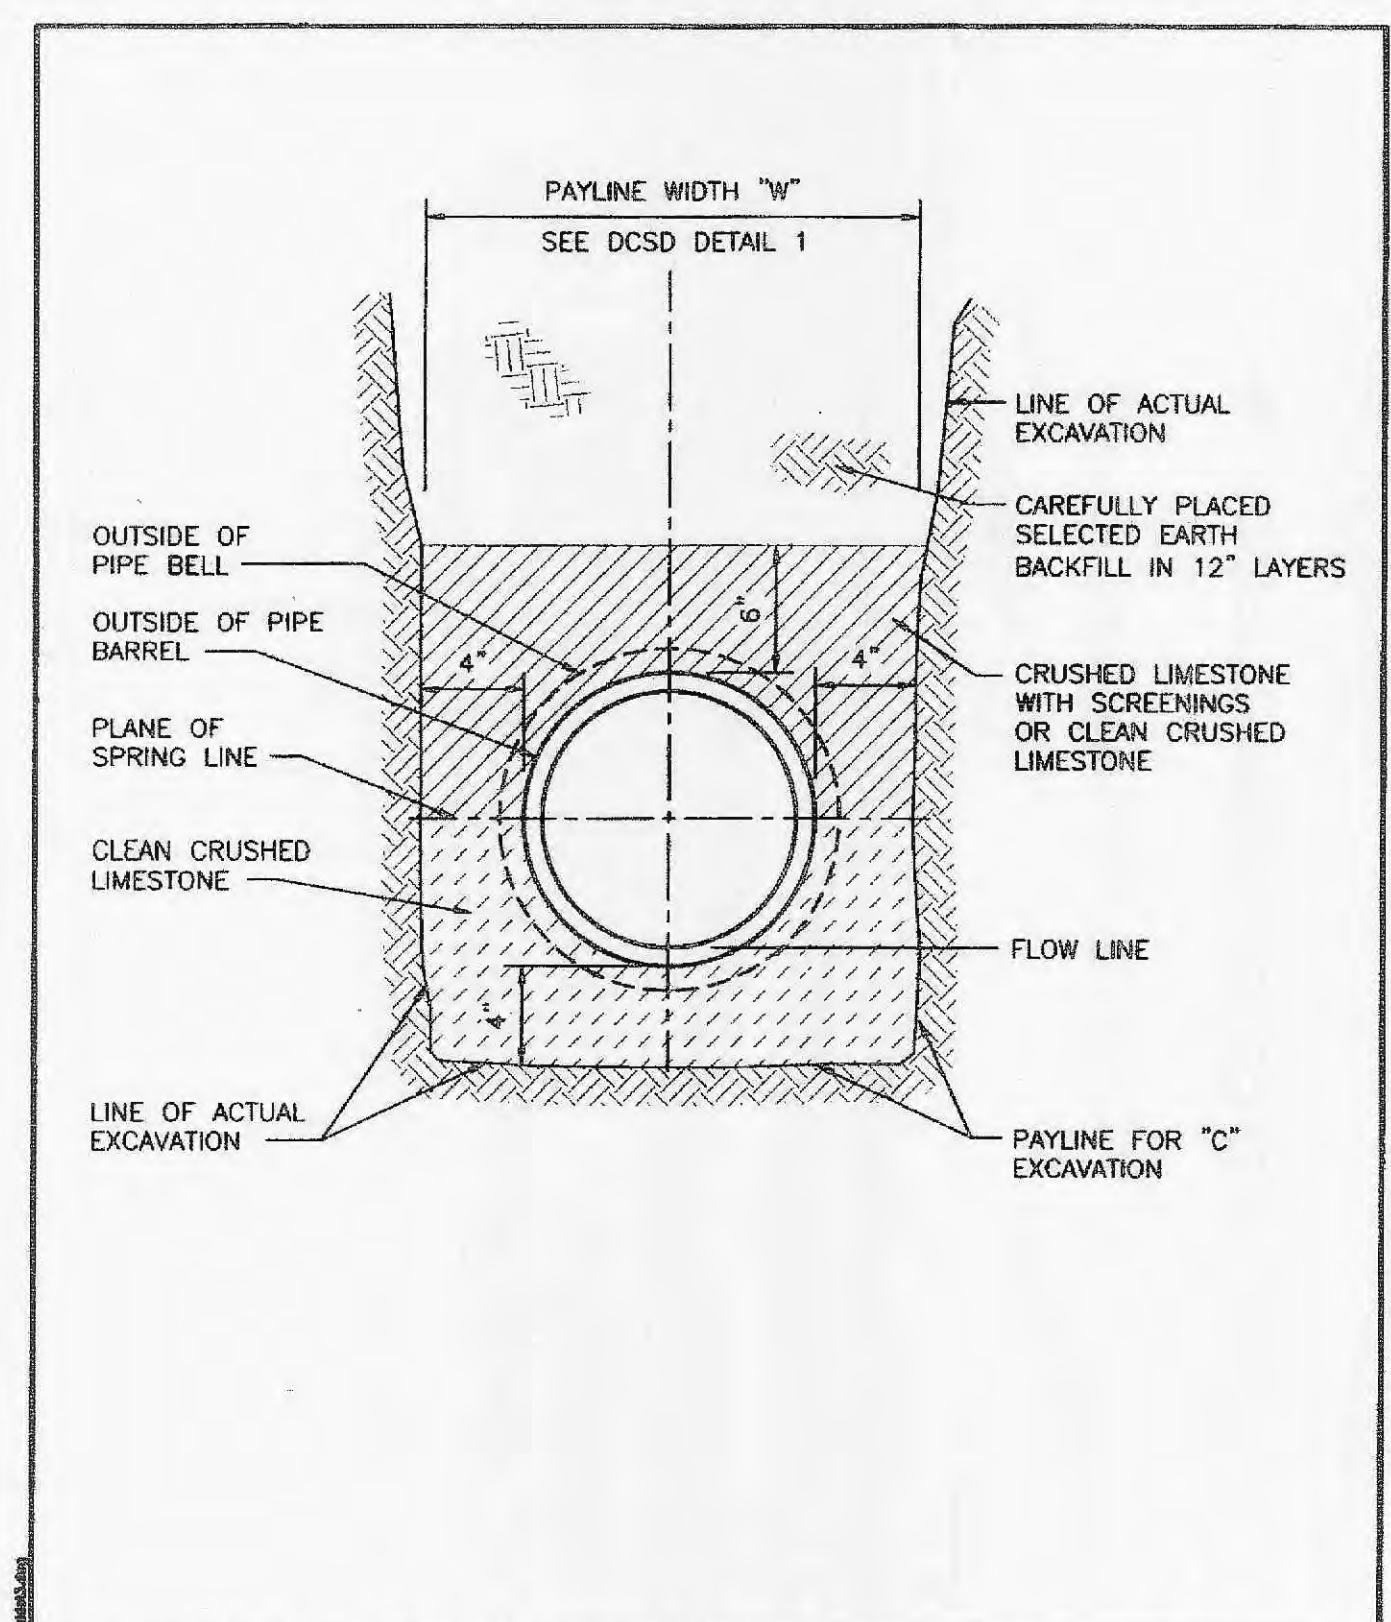


DUCKETT CREEK SANITARY DISTRICT

PIPE BEDDING CLASS "C" (FOR ALL PIPE EXCEPT REINFORCED CONCRETE PIPE)
Dim By: BSM App By: KLA Detail No. 3
Ctd By: MDOB Date: 12-21-99

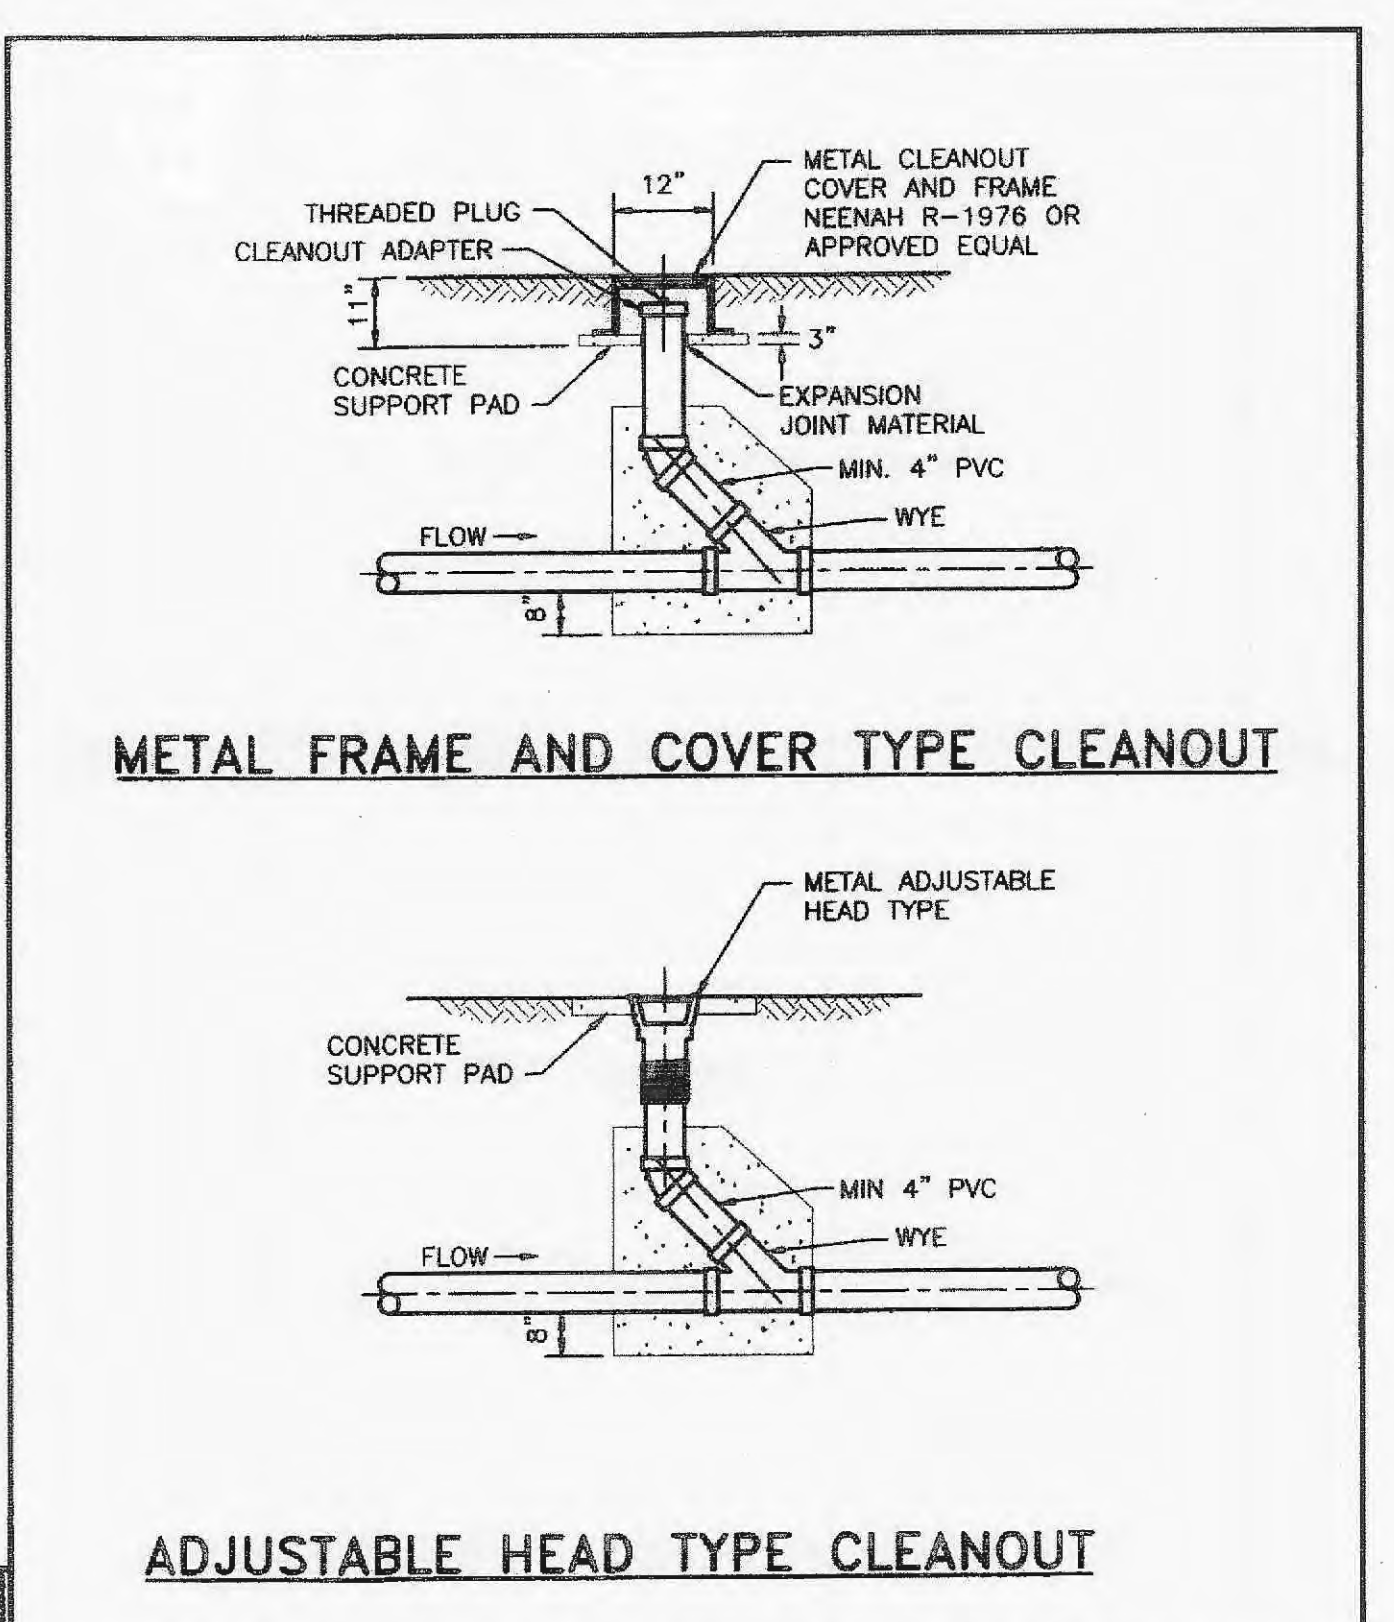


DUCKETT CREEK SANITARY DISTRICT

TYPICAL SEWER LATERAL CLEANOUT DETAILS
Dim By: BSM App By: KLA Detail No. 25
Ctd By: MDOB Date: 1-8-01

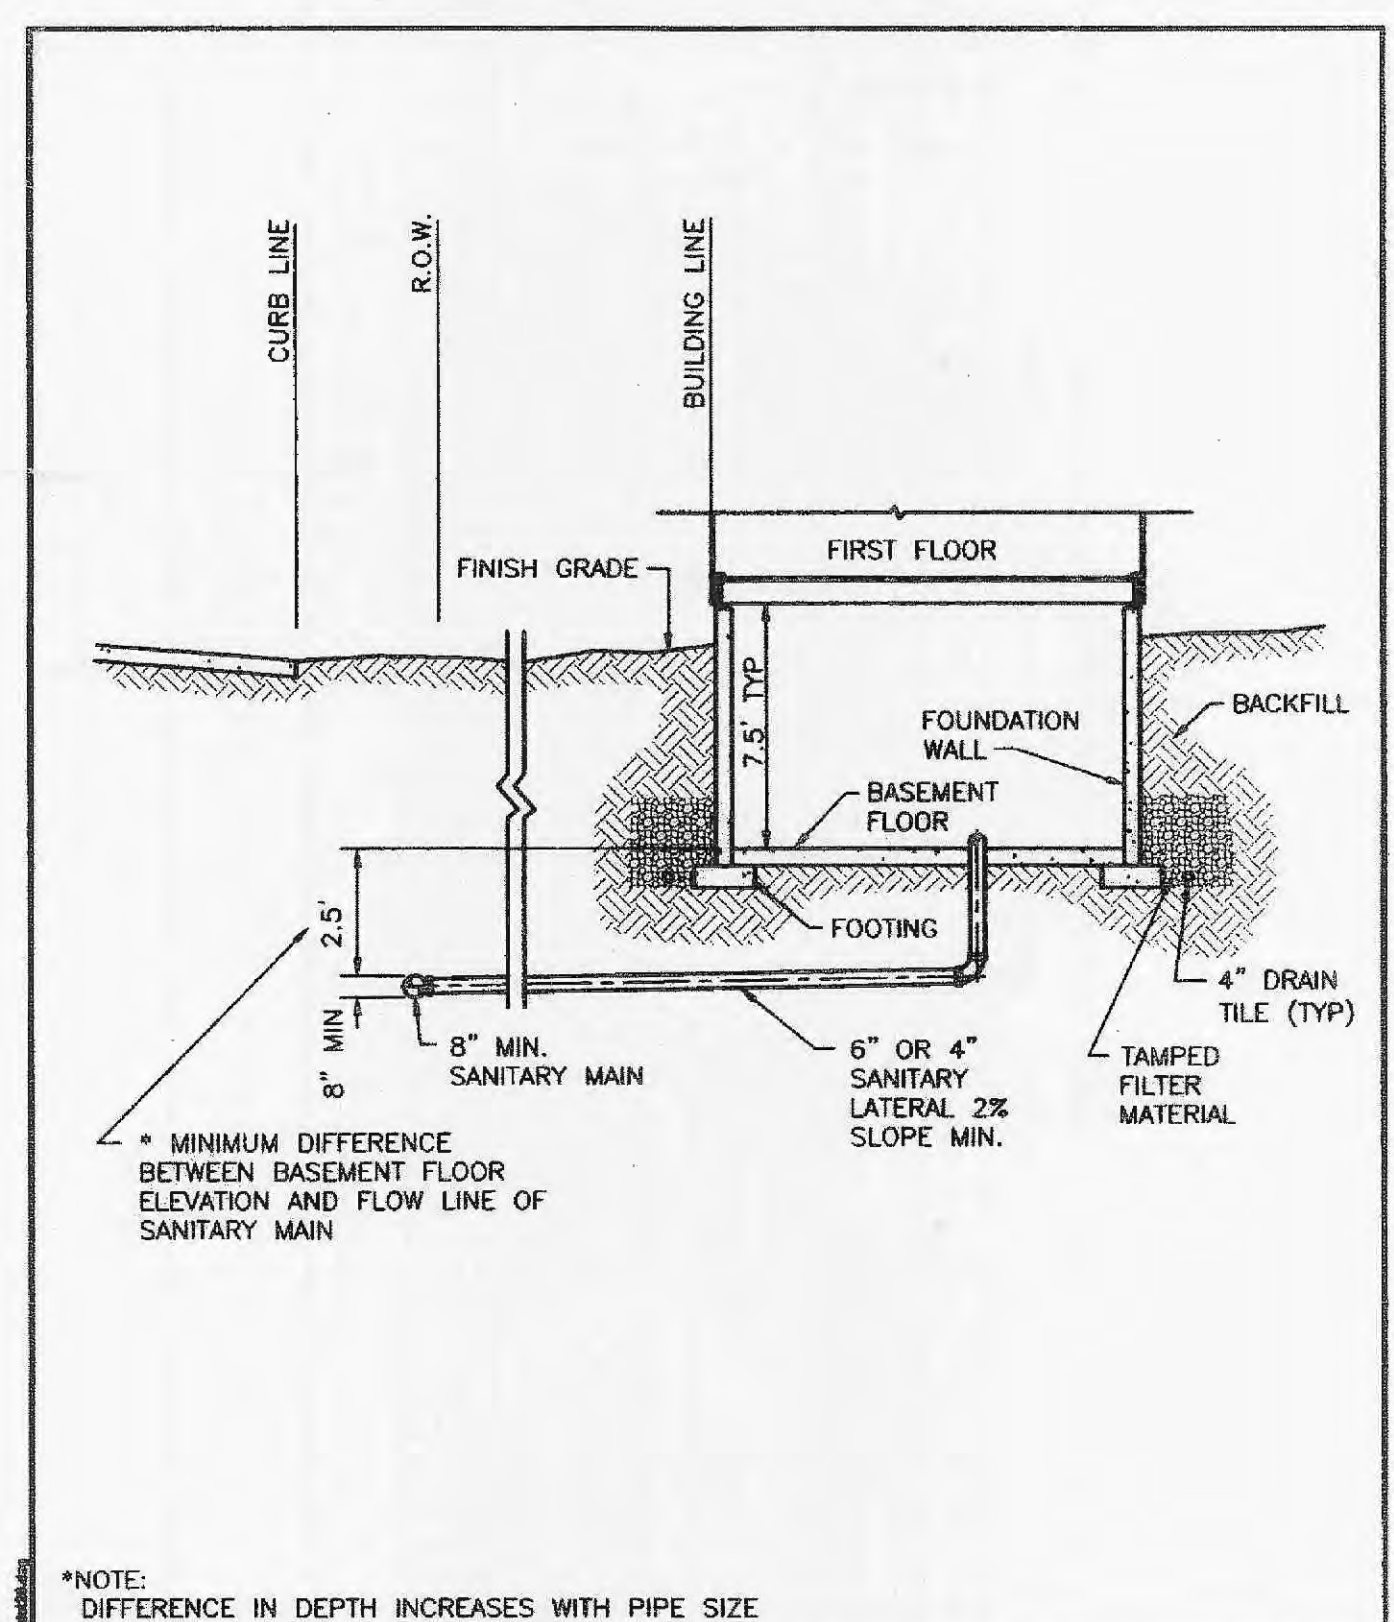

DUCKETT CREEK SANITARY DISTRICT

TYPICAL SANITARY SEWER LATERAL PROFILE
Dim By: BSM App By: KLA Detail No. 26
Ctd By: MDOB Date: 1-9-01

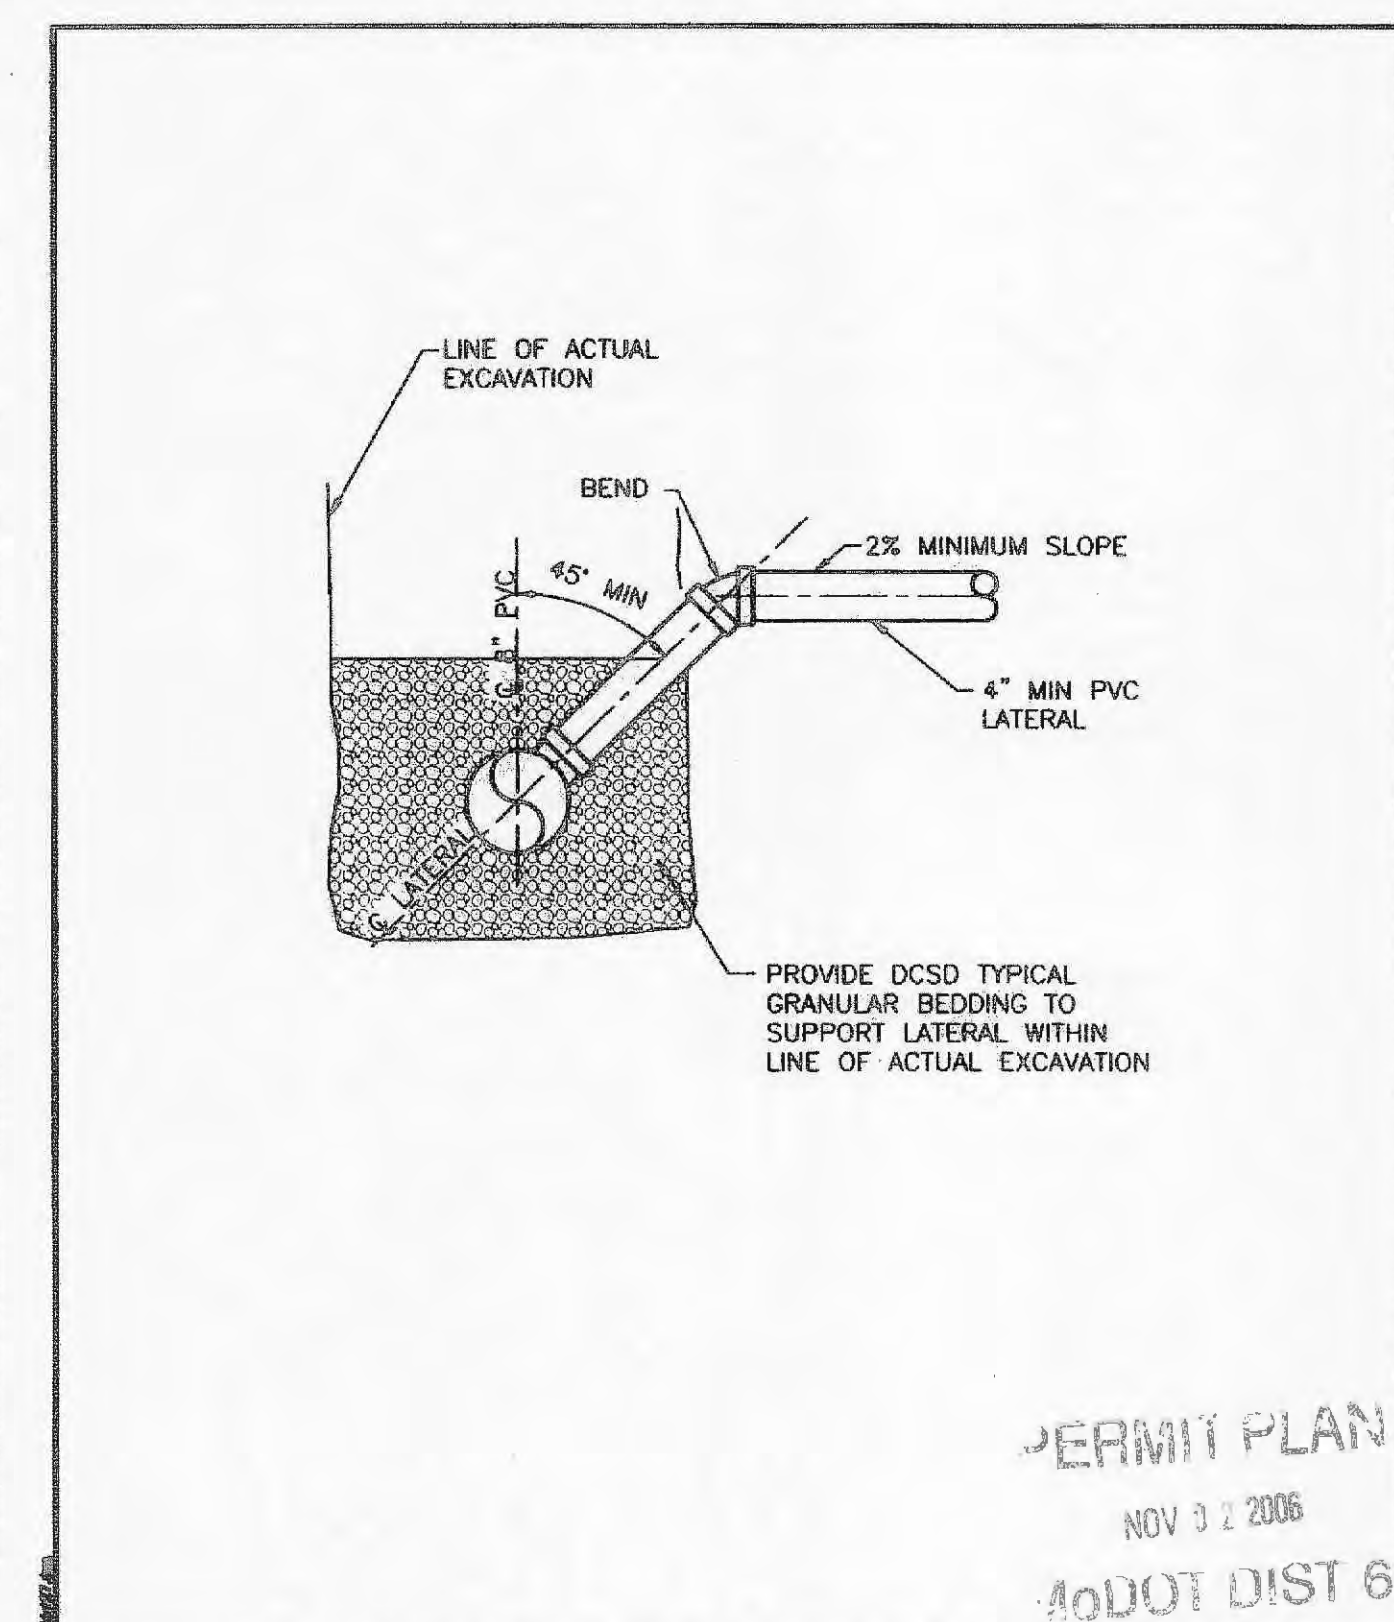

DUCKETT CREEK SANITARY DISTRICT


SANITARY SEWER LATERAL RISER DETAIL
Dim By: BSM App By: KLA Detail No. 27
Ctd By: MDOB Date: 1-9-01

PERMIT PLAN
NOV 9 2 2006
ADOT DIST 6

REVISIONS

BUESCHER DITCH & ASSOCIATES, INC.
2 East Fifth Street, P.O. Box 621, Washington, Missouri 63090
Telephone: 1-636-239-7681
E-mail: www.buescherditch.com

DETAILS
SIGNATURE BANK OF O'FALLON
ST. CHARLES COUNTY, MISSOURI

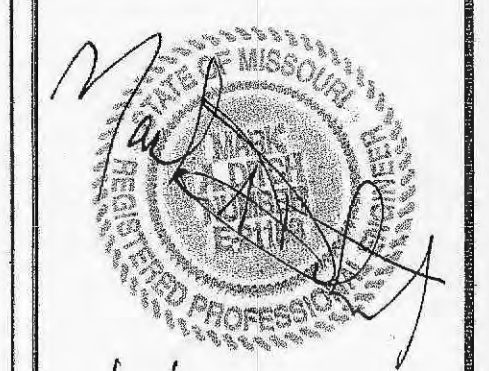

10/30/06
6-19-06
DATE
06033
PROJECT NUMBER
SITE DEV. PLANS.DWG
FILE NAME
13 of 16
SHEET OF
GMM
DRAWN CHECKED