

VEGETATIVE ESTABLISHMENT FOR URBAN DEVELOPMENT SITES

APPENDIX A

Seeding Rates:

Permanent:

Tall Fescue - 30 lbs./ac.
Smooth Brome - 20 lbs./ac.
Combined: Fescue @ 15 lbs./ac. and Brome @ 10 lbs./ac.

Temporary:

Wheat or Rye - 150 lbs./ac (3.5 lbs. per 1000 sq. ft.)
Oats - 120 lbs./ac (2.75 lbs. per 1000 sq. ft.)

Seeding Periods:

Fescue or Brome March 1 to June 1
 August 1 to October 1

Wheat or Rye March 15 to November 1
Oats March 15 to September 15

Mulch Rates:



100 lbs. Per 1,000 sq. ft. (4,356 lbs. per acre)

Fertilizer Rates:

Nitrogen 30 lbs./ac.
Phosphate 30 lbs./ac.
Potassium 30 lbs./ac.
Lime 600 lbs./ac. ENM*

*ENM - Effective Neutralizing Material as per State evaluation of quarried rock.




Vegetat.dwg

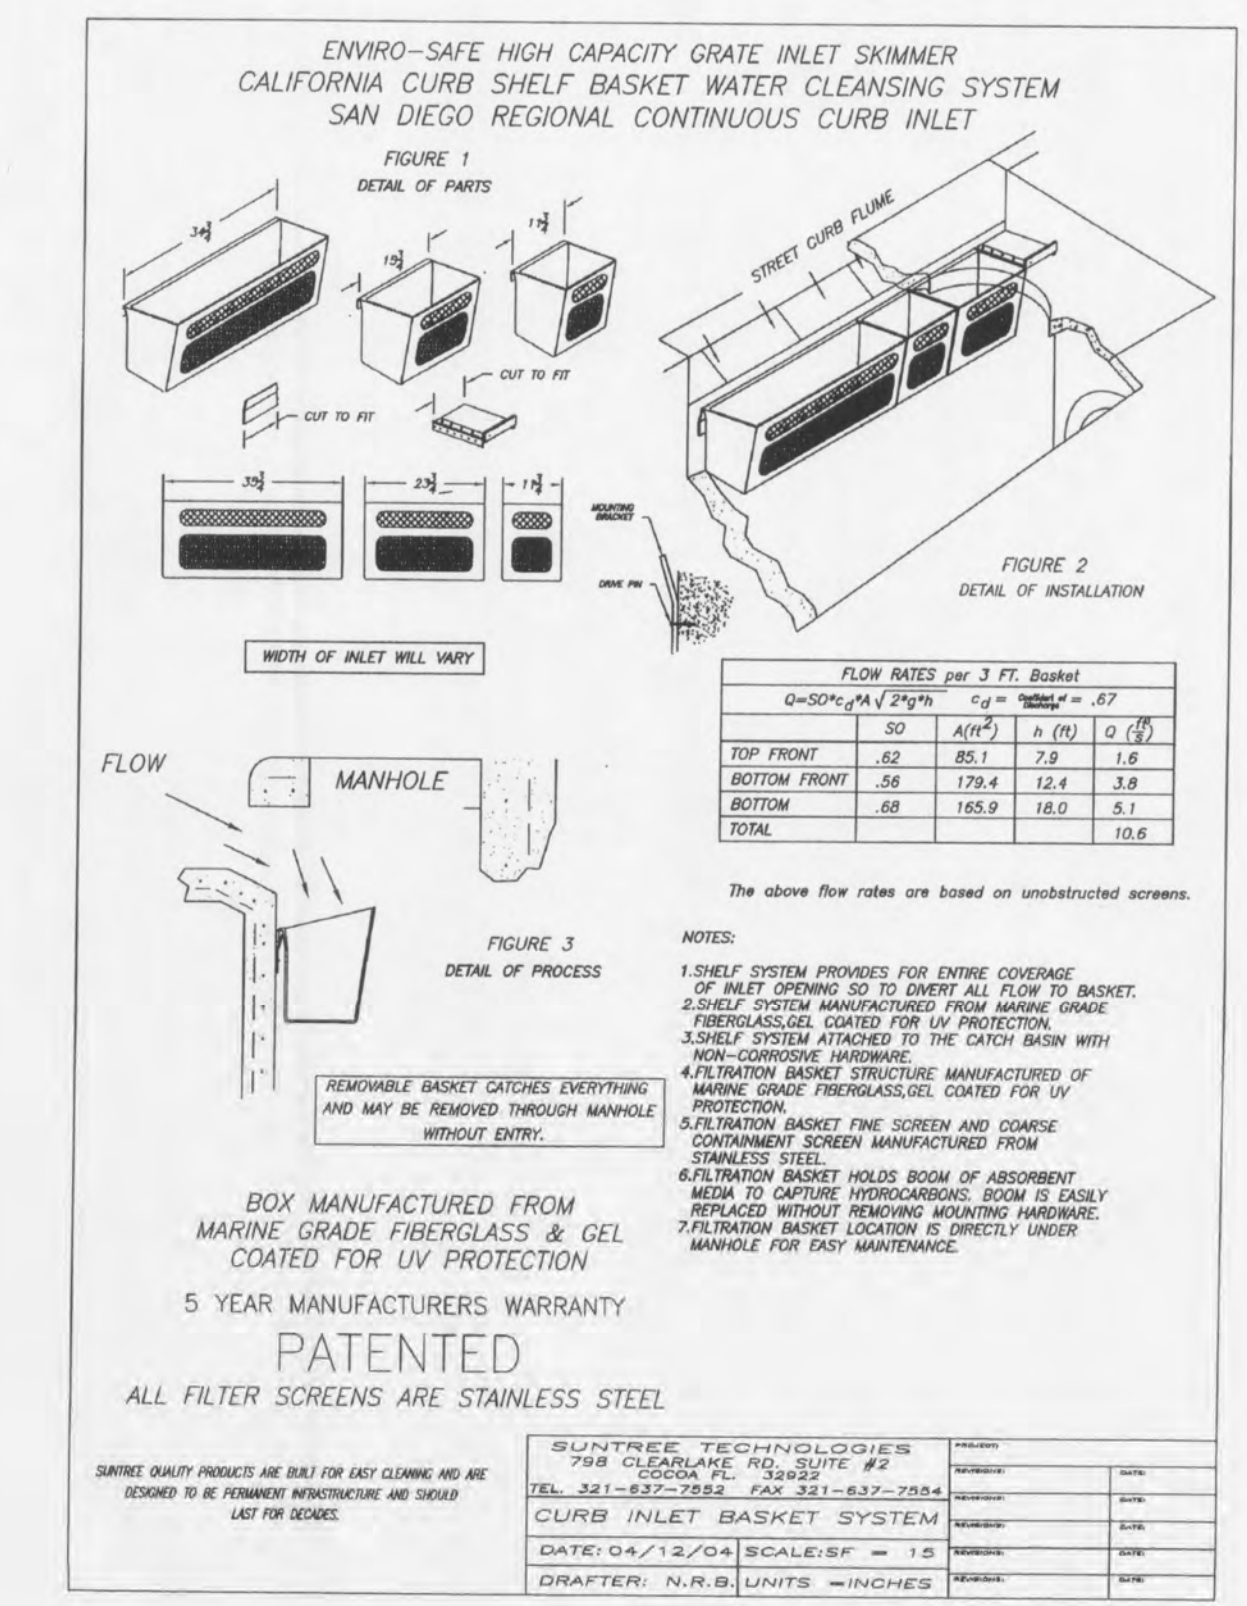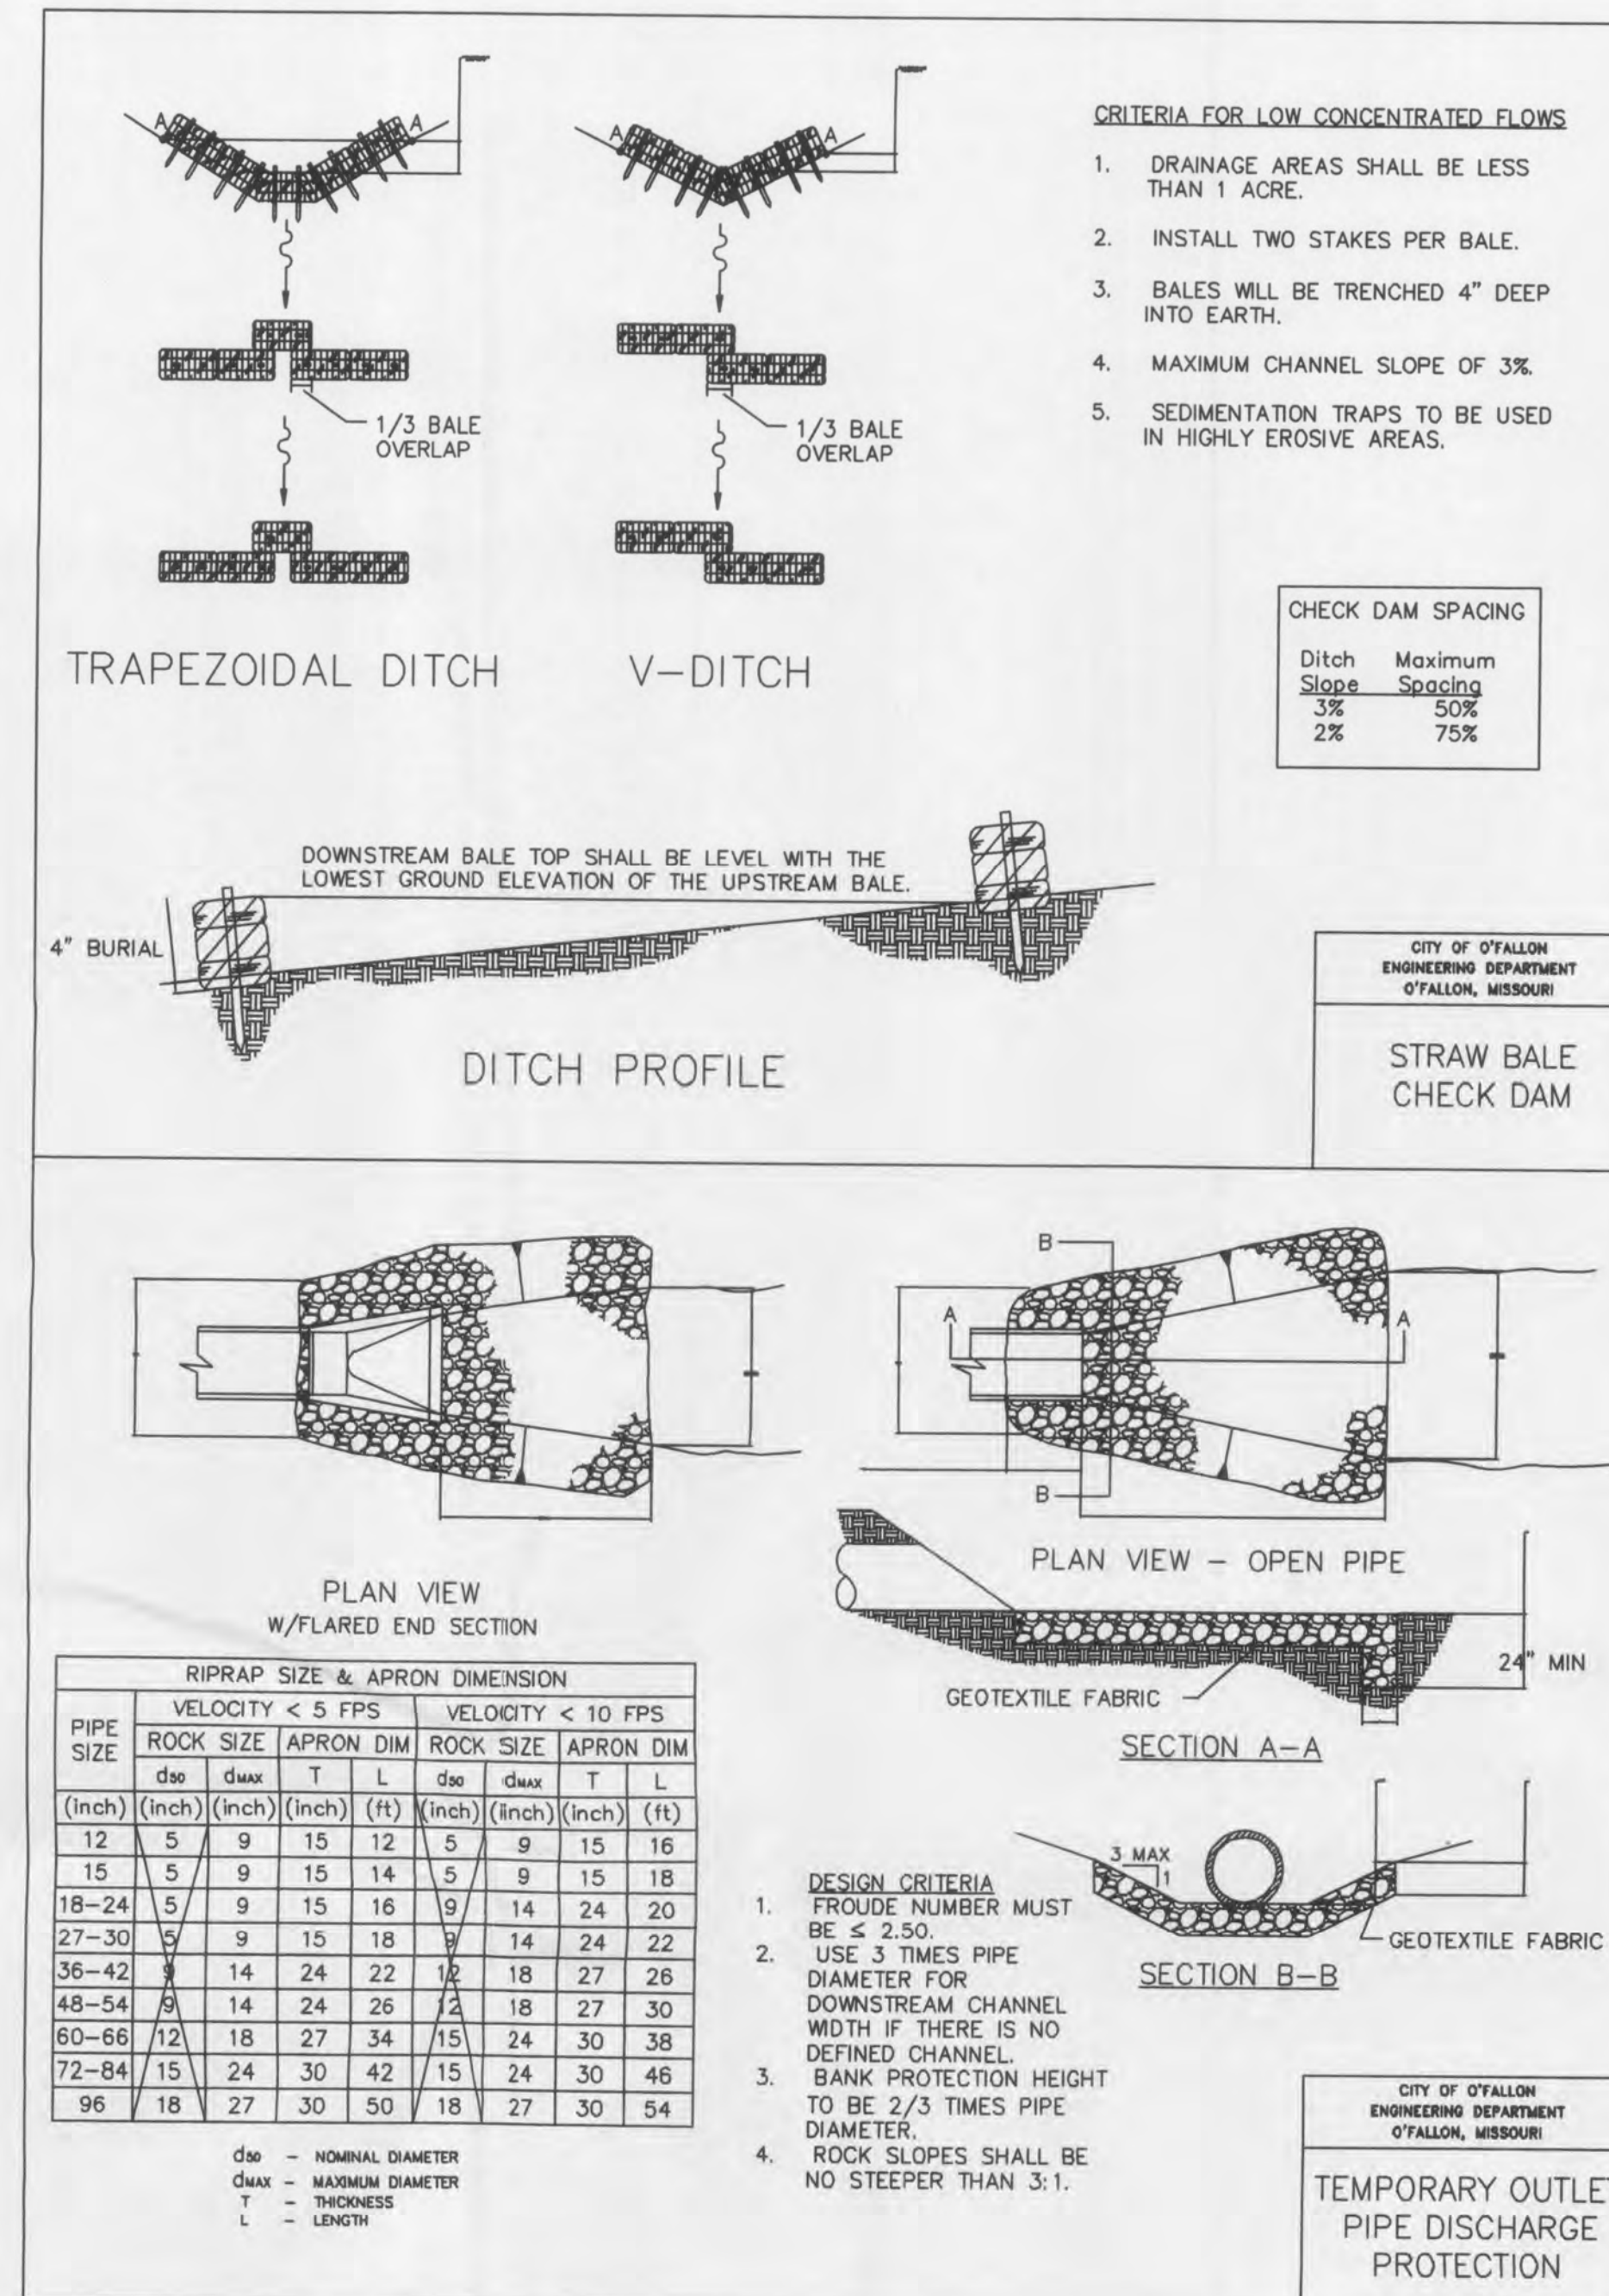

Curb Inlet Baskets are to be used in CI 103, DCI 104, and DCI 105

MAINTENANCE NOTES:

- Curb Inlet Baskets shall be cleaned and debris removed a minimum of four times per year, and replacement of hydrocarbon booms a minimum of twice per year.
- Following maintenance and/or inspection, the maintenance operator shall prepare a maintenance/inspection record. The record shall include any maintenance activities performed, amount and description of debris collected, and condition of filter.
- The owner shall retain the maintenance/inspection record for a minimum of five years from the date of maintenance. These records shall be made available to the governing municipality for inspection upon request at any time.
- Any person performing maintenance activities must have completed a minimum of OSHA 24-hour hazardous waste worker(hazwoper) training.
- For curb inlet units: remove manhole lid to gain access to inlet filter insert. Where possible maintenance should be performed from the ground surface.
- Remove all trash, debris organics, and sediments collected by the inlet filter insert.
- Evaluation of the hydrocarbon boom shall be performed at each cleaning. If the boom filled with hydrocarbons and oils it should be replaced. Attach new boom to basket with plastic ties through pre-drilled holes in the basket.
- Transport all debris, trash, organics and sediments to approved facility for disposal in accordance with local and state requirements.
- The hydrocarbon boom is classified as hazardous waste material and will have to be picked up and disposed of as hazardous waste.

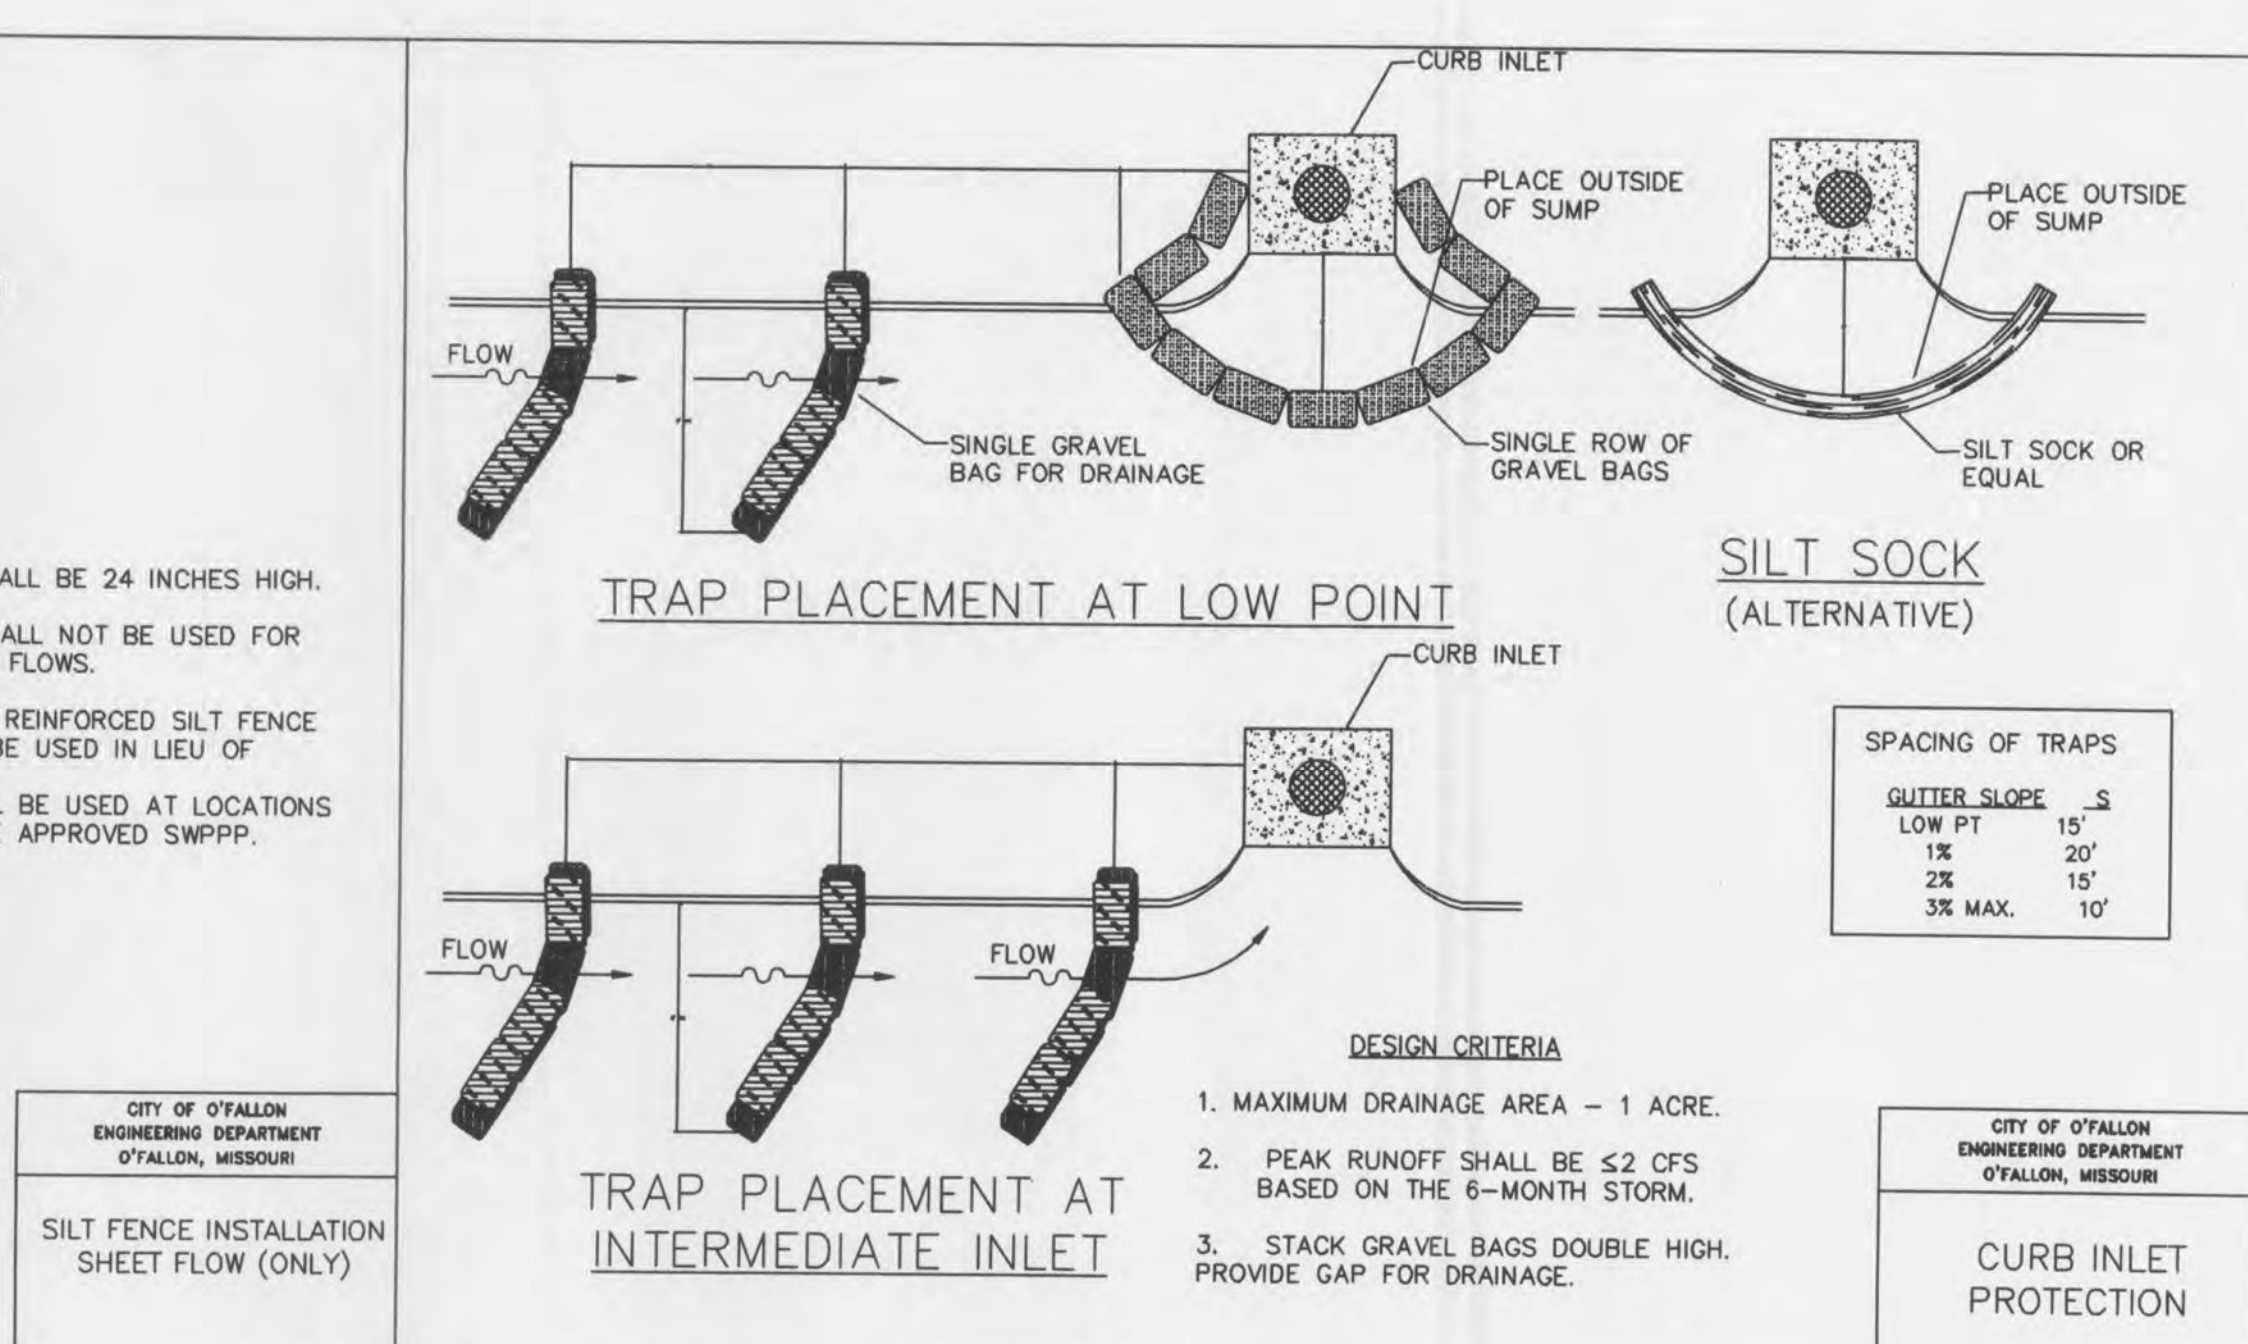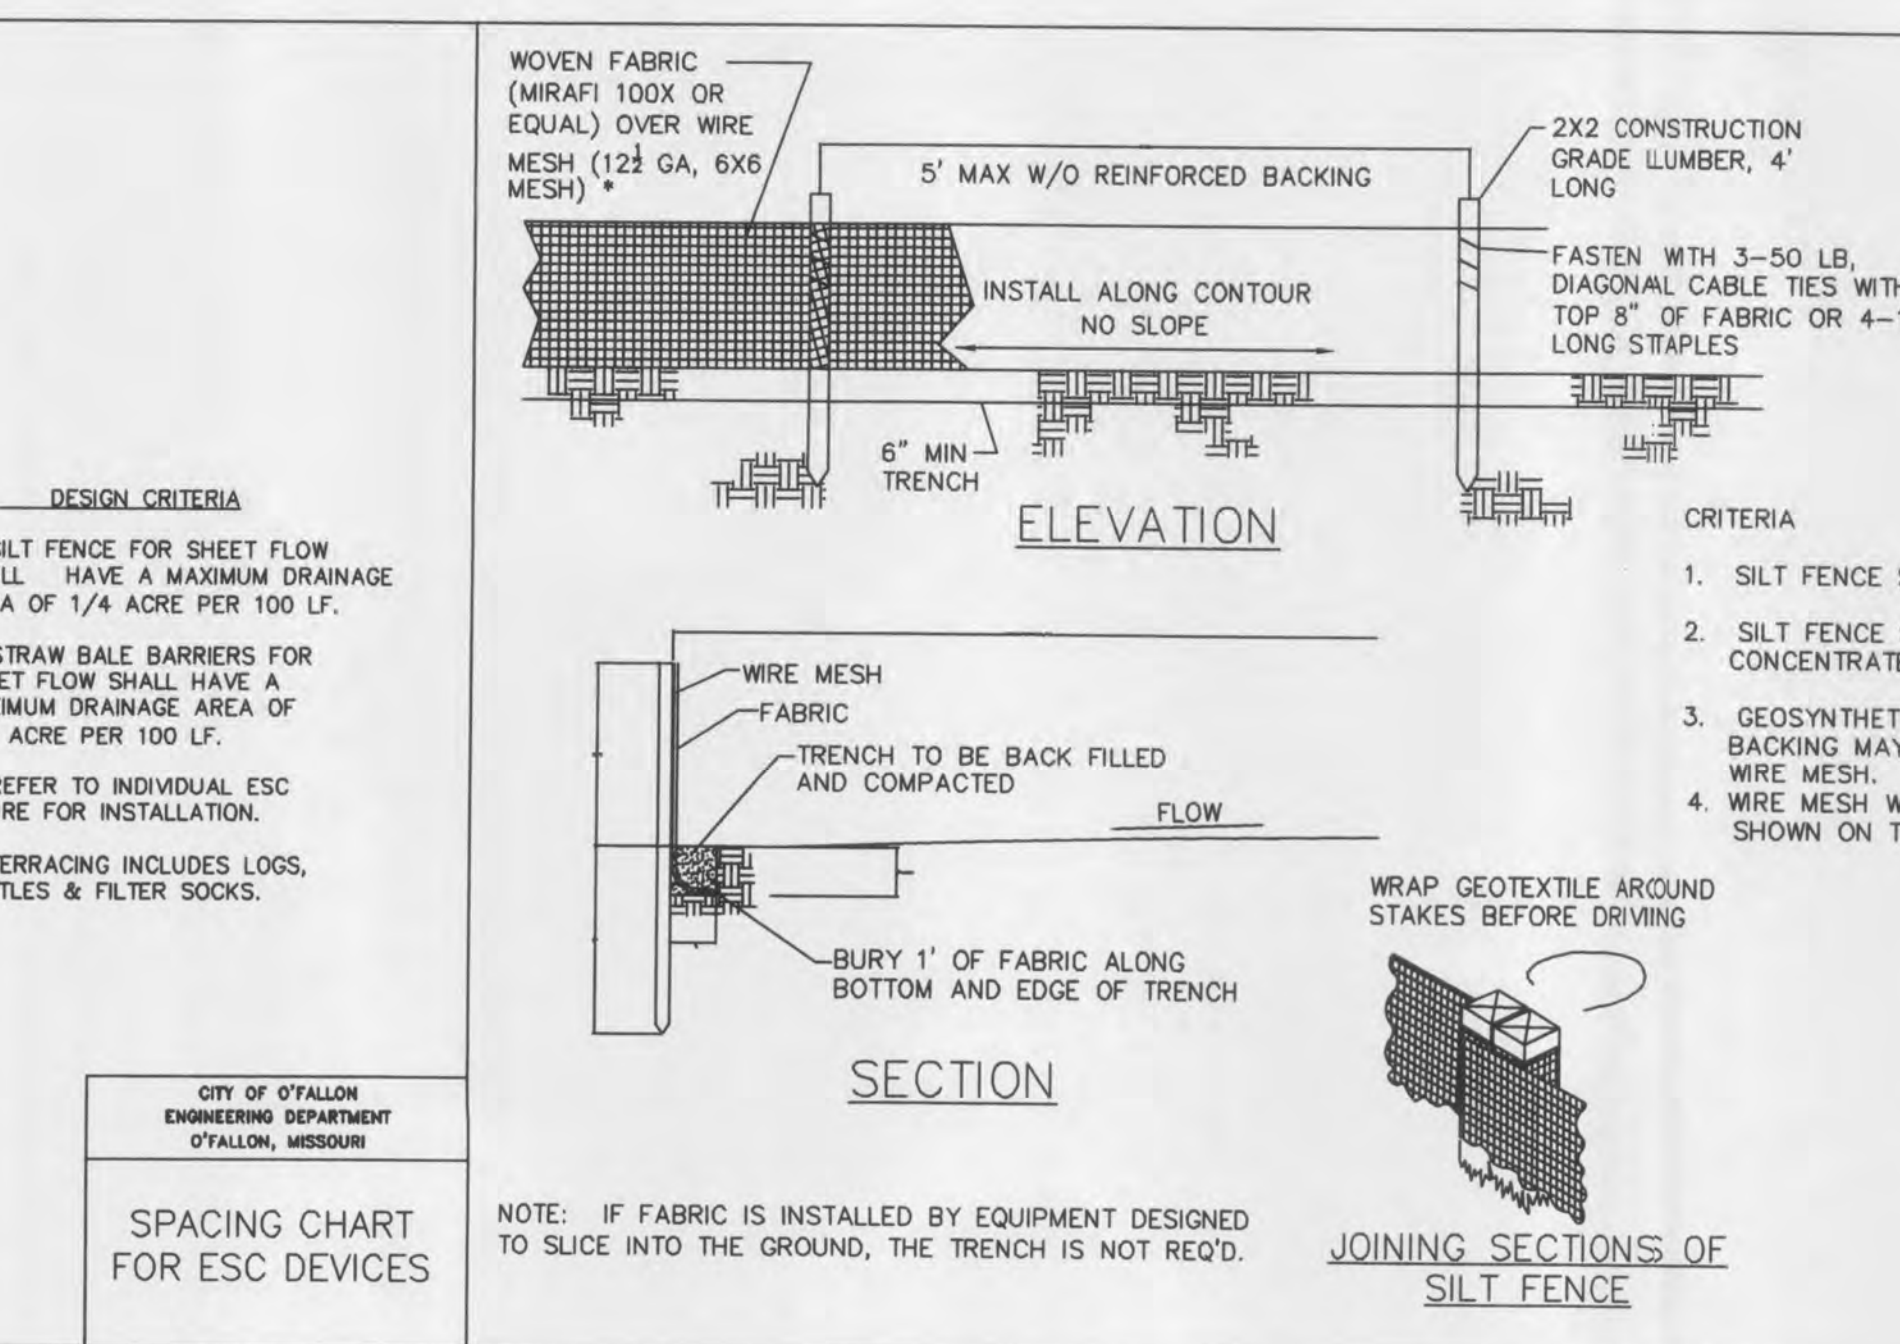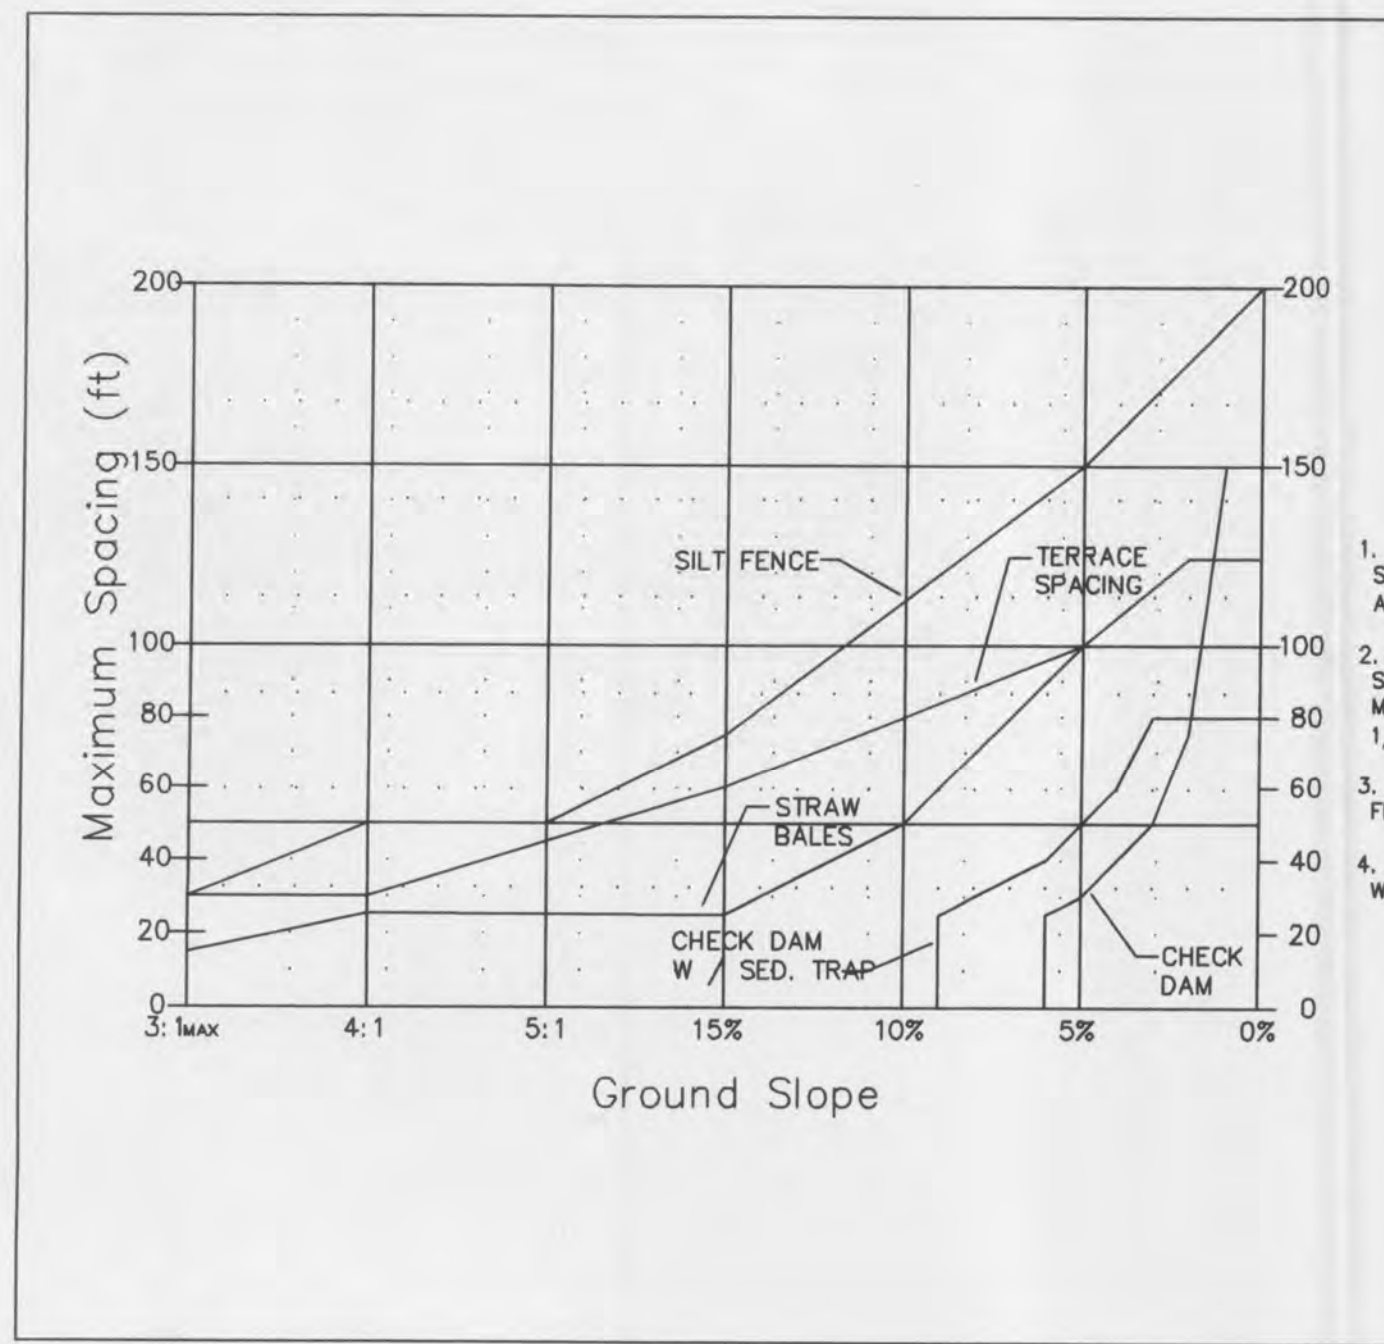

ST. LOUIS RV SALES
DETAILS

ST. CHARLES ENGINEERING & SURVEYING, INC.
801 S. FIFTH STREET, SUITE 202
ST. CHARLES, MO 63301
TEL: (636) 947-0607 FAX: (636) 947-2448

ST. CHARLES ENGINEERING AND SURVEYING, INC.
PROFESSIONAL ENGINEERING CORPORATION
MISSOURI STATE CERTIFICATE OF AUTHORITY - 001647

SFC

MICHAEL NEWELL
REGISTERED PROFESSIONAL ENGINEER
NO. 120146
7/15/13

ORDER NO. 12-0146
DATE 08/05/18