


Project General Notes

1. Refer to Sheet SV.1 Site Survey (Boundary) within Volume 1: Site/Civil of Construction Documents dated September 20, 1999 by Hellmuth, Obata & Kassabaum, P.C. for the USGS benchmark location and description.
2. All areas disturbed during site grading activities and utility installation are to be restored with turf grass sod upon completion of work.
3. The Contractor shall assume complete responsibility for controlling all siltation and erosion of the project area. The Contractor shall use whatever means necessary to control erosion and siltation including, but not limited to, staked straw bales and/or siltation fabric fences (possible methods of control are detailed in the plan). Control shall commence with grading and be maintained throughout the project until acceptance of the work by the Owner and/or the City of O'Fallon and/or MoDOT. The Contractor's responsibilities include all design and implementation as required to prevent erosion and depositing of silt.
4. All visible storm sewer elements (manhole covers, etc.) are private.
5. Granular backfill will be used for utilities within 10 ft. of the edge of pavement, curbs and in a 1:1 shear plane of the pavement.

MasterCard

O'Fallon, Missouri Utility Relocation & Addition

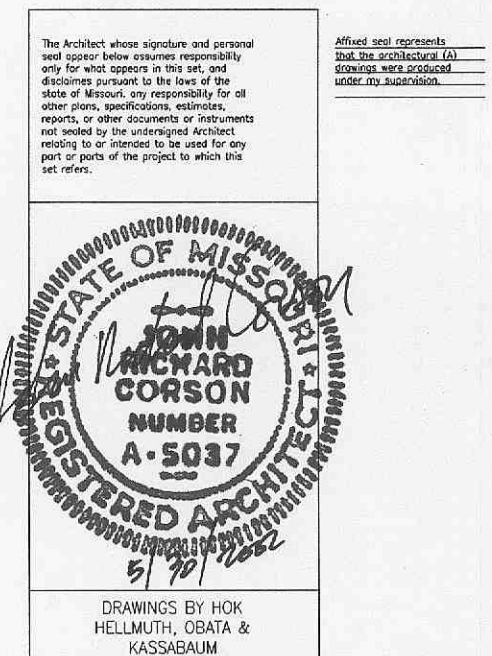

HELLMUTH, OBATA + KASSABAUM

RECEIVED
MAY 31 2002
CITY OF O'FALLON, MO

211 North Broadway, Suite 600, St. Louis, MO 63102

620 Avenue Of The Americas, New York, New York 10011

CONSTRUCTION DOCUMENTS: DECEMBER 20, 2001

Bldg. Inspector