

Rev. 3-2-92 T&E Per City of O'Fallon Comments
 (Swales, Basin)
 Rev. 3-12-92 per City of O'Fallon, DWD


Scale: 1" = 50'



The total yardage for this project is based on a 1% shrinkage factor.
 This shrinkage factor is subject to change, due to soil conditions, (types and moisture content), weather conditions, and the percent correction actually achieved. As a result, adjustments in final grades may be required.
 Earth quantities obtained from aerial grid map, with contours at two foot intervals, with a tolerance of plus or minus 1 foot, or 1/2 contour interval.
 The computed bid yardage is to finish grade and does not include removal of subgrade.

Siltation Control

SILTATION CONTROL SHALL CONSIST OF TEMPORARY BERMS AND SWALES TO DIVERT STORM WATER RUNOFF TO A NATURAL DISCHARGE POINT. (SEE GRADING PLAN FOR LOCATIONS.) AT WHICH POINT THERE SHALL BE A DOUBLE ROW OF STRAW BALES WITH FOUR FEET OF SEPARATION BETWEEN ROWS. THE STRAW BALES SHALL BE PLACED WITH A ONE FOOT SEPARATION BETWEEN BALES AND STRAW BALES SHALL BE STAGGERED. IN AREAS WHERE A BERM AND SWALE ARE NOT FEASIBLE, A SINGLE ROW OF STRAW BALES SHALL BE PLACED END TO END TO PROTECT ADJACENT PROPERTY AND RIGHT-OF-WAYS (THIS SHALL BE THE RESPONSIBILITY OF THE GRADING CONTRACTOR OR DEVELOPER IF SO AGREED). UPON COMPLETION OF STORM SEWERS, STRAW BALES SHALL BE PLACED ON ALL SIDES OF APPROPRIATE STRUCTURES TO KEEP SILT OUT OF STORM SEWER (THIS SHALL BE THE RESPONSIBILITY OF THE SEWER CONTRACTOR OR THE DEVELOPER IF SO AGREED). ALL STRAW BALES SHALL BE SECURELY ANCHORED AND PROPERLY MAINTAINED UNTIL ALL DISTURBED AREAS ARE PAVED OR VEGETATION ESTABLISHED.

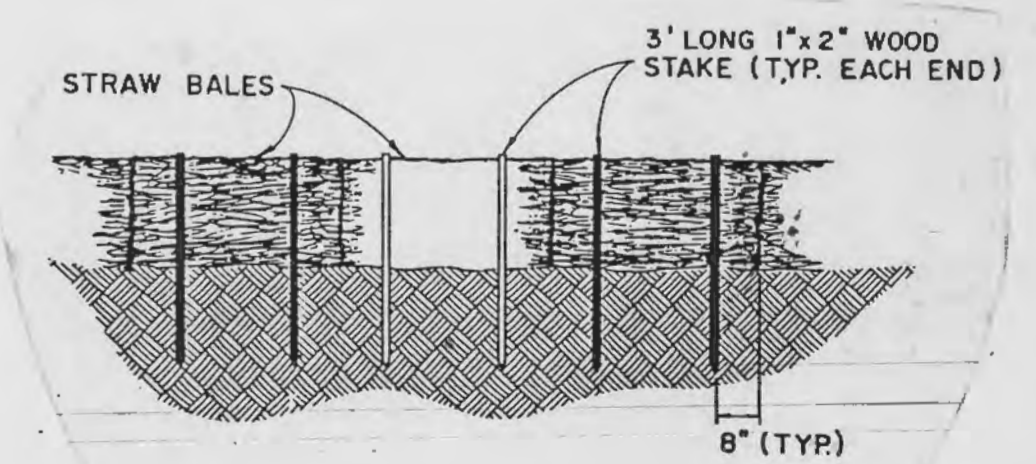

STAKED BALE DETAIL
 N.T.S.

BID YARDAGE: 51,207 CU. YDS.
 (DOES NOT INCLUDE SUBGRADE)
 (Import 29,902 CU YDS. From Village D)

THIS SHEET FOR DRAINAGE PURPOSES ONLY - NOT FOR CONSTRUCTION