




TYPICAL PAVEMENT SECTION

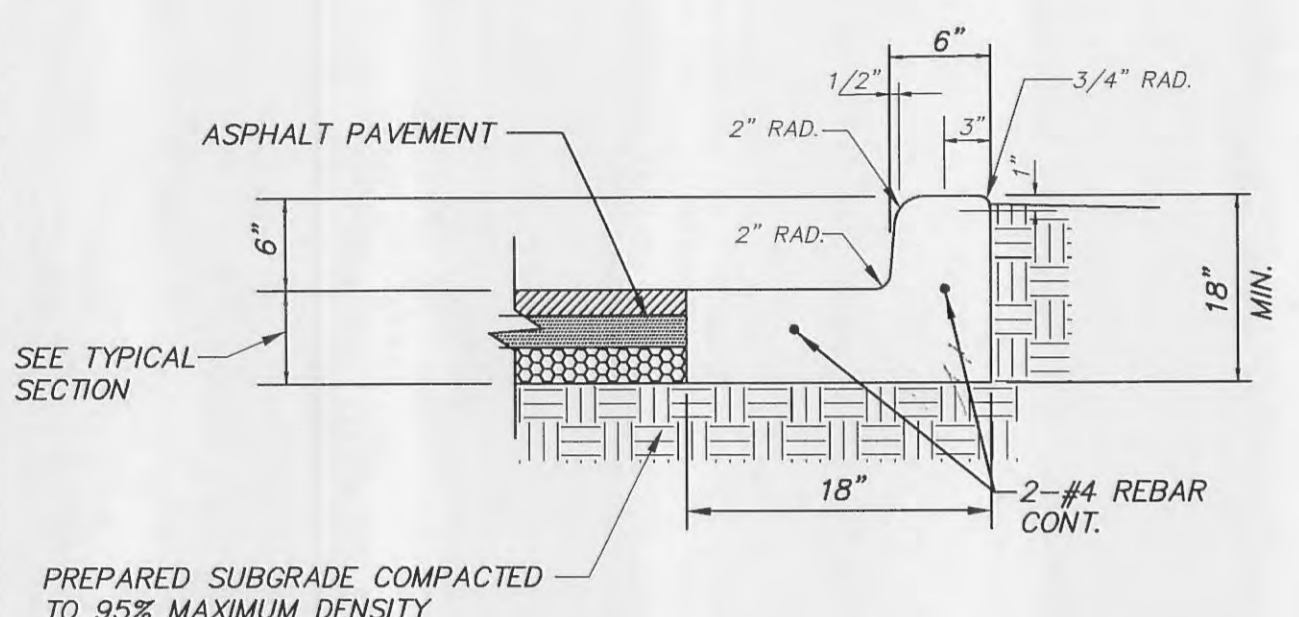

1.5' CONCRETE CURB & GUTTER

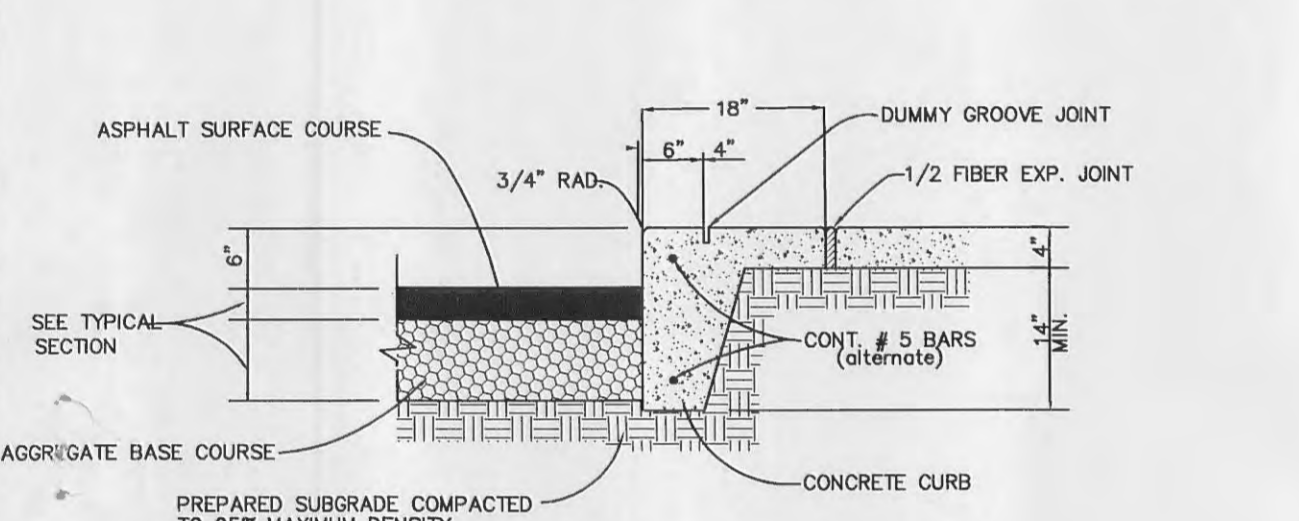


6" CONCRETE CURB WITH SIDEWALK

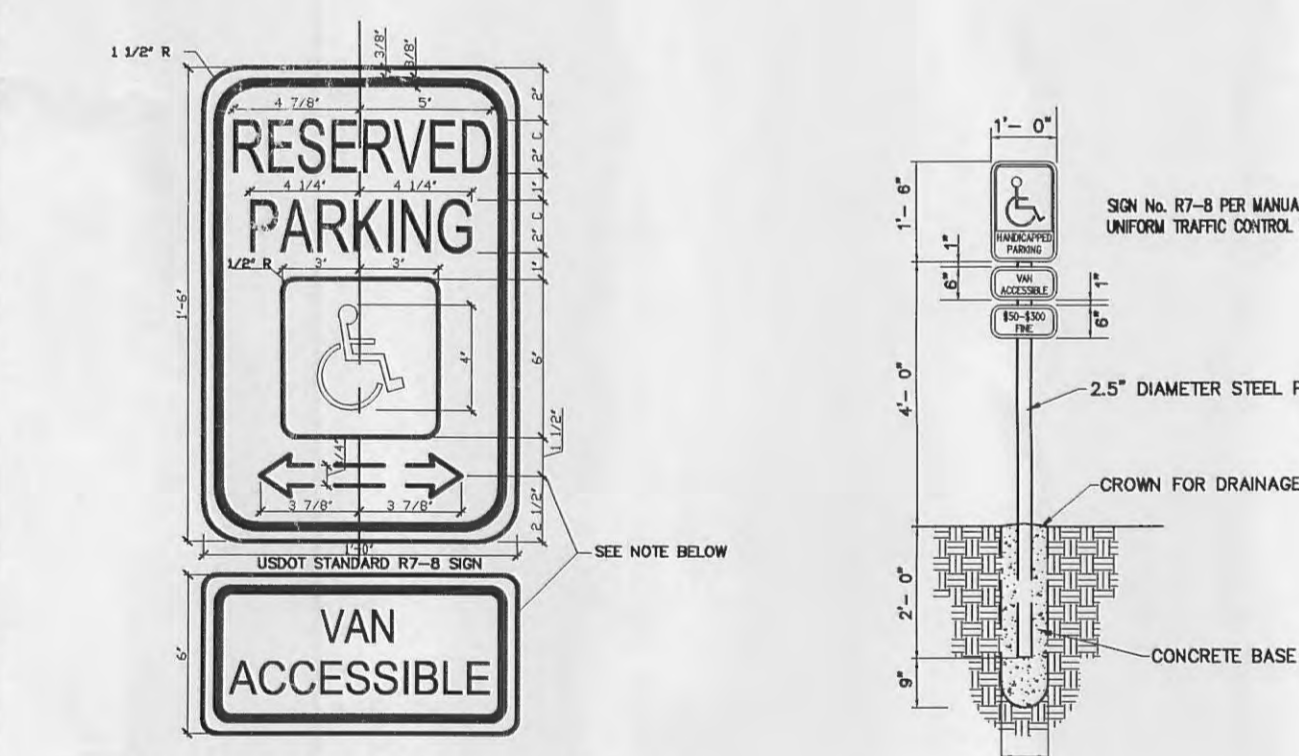


HANDICAPPED SIGN DETAIL


ACCESSIBILITY SIGNAGE

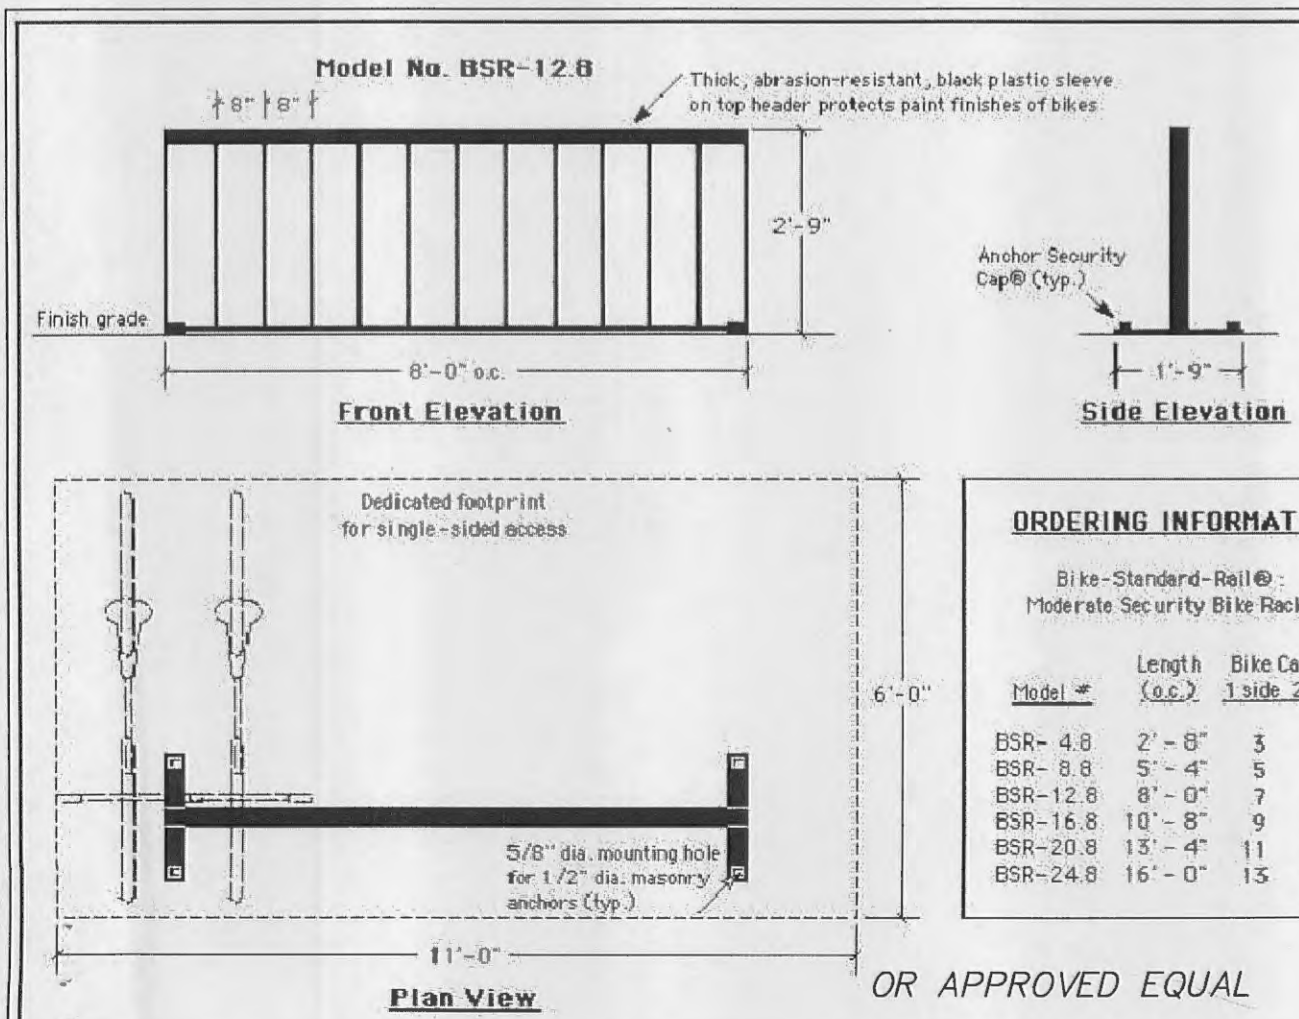


OR APPROVED EQUAL

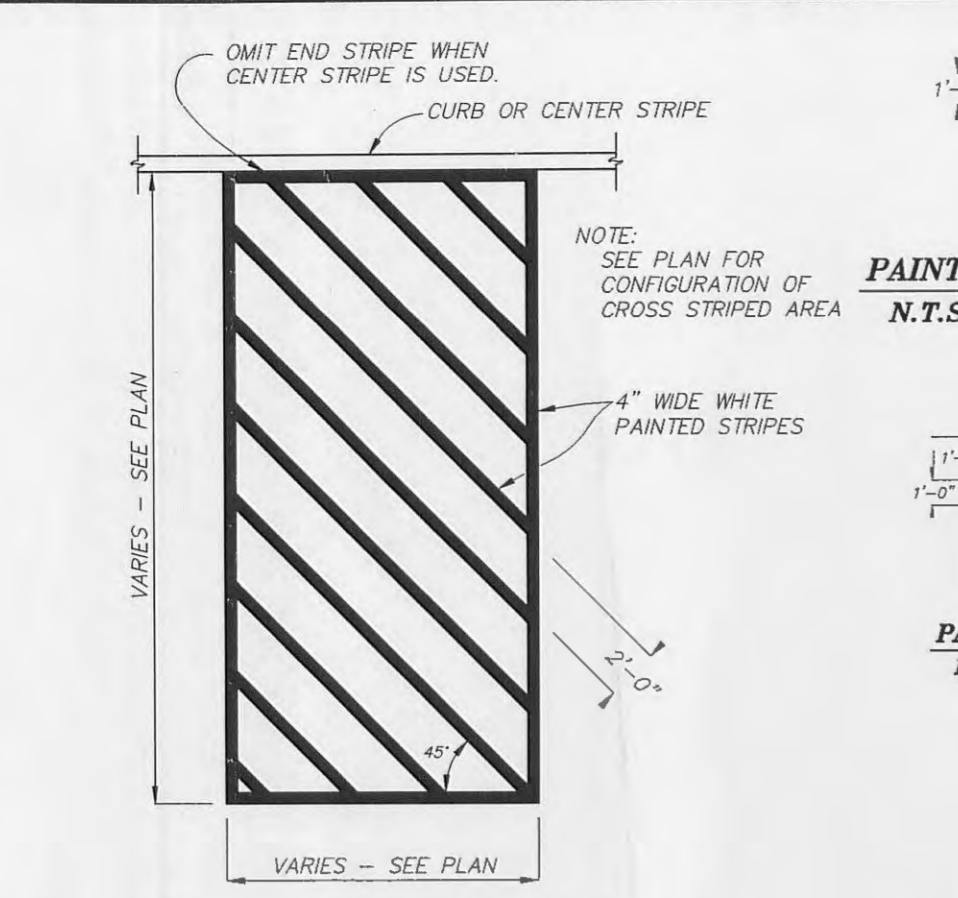


CROSS STRIPING DETAIL

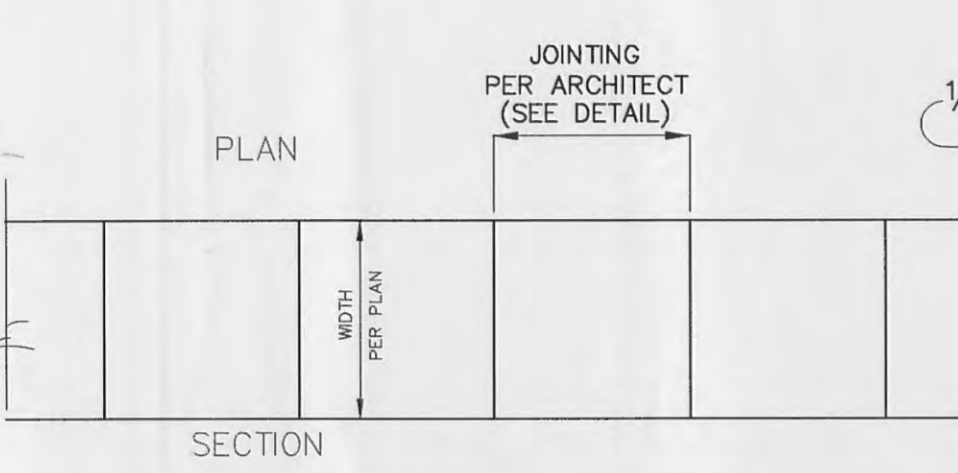


CONCRETE SIDEWALK DETAIL

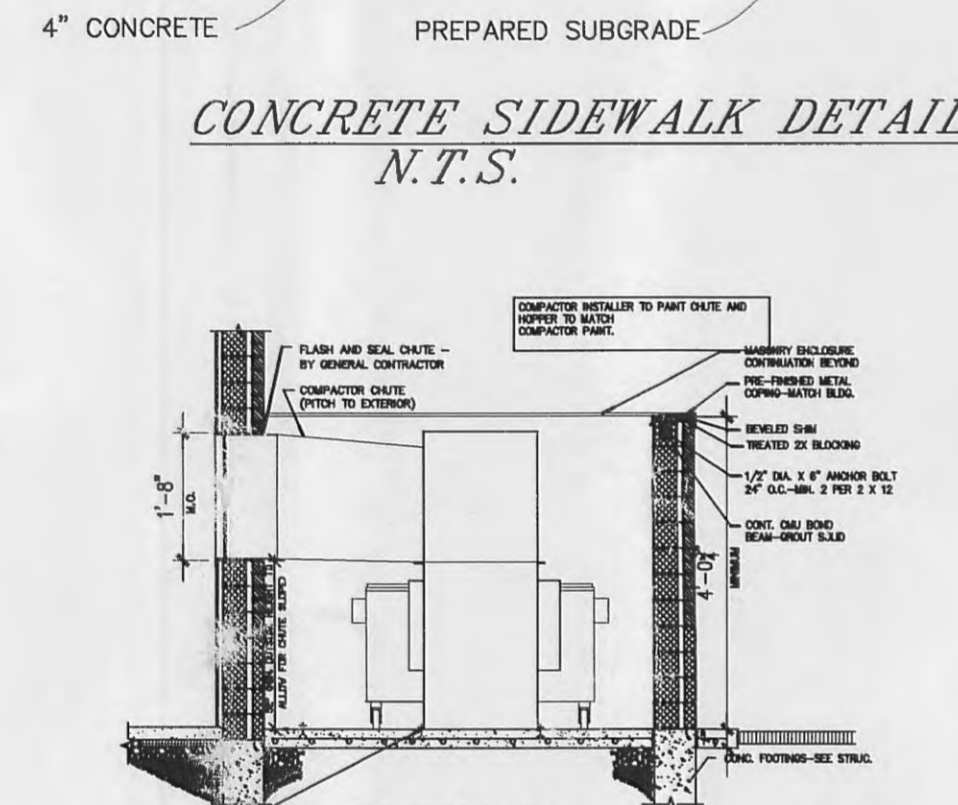

CONCRETE CURB RAMP

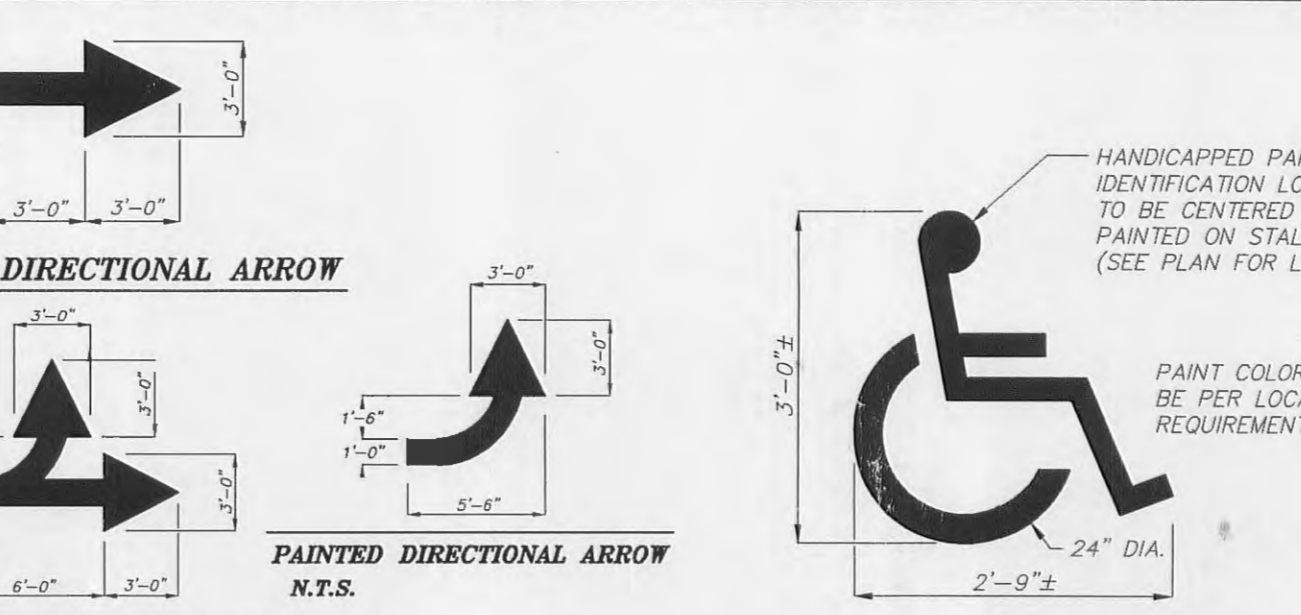


PAINTED DIRECTIONAL ARROW

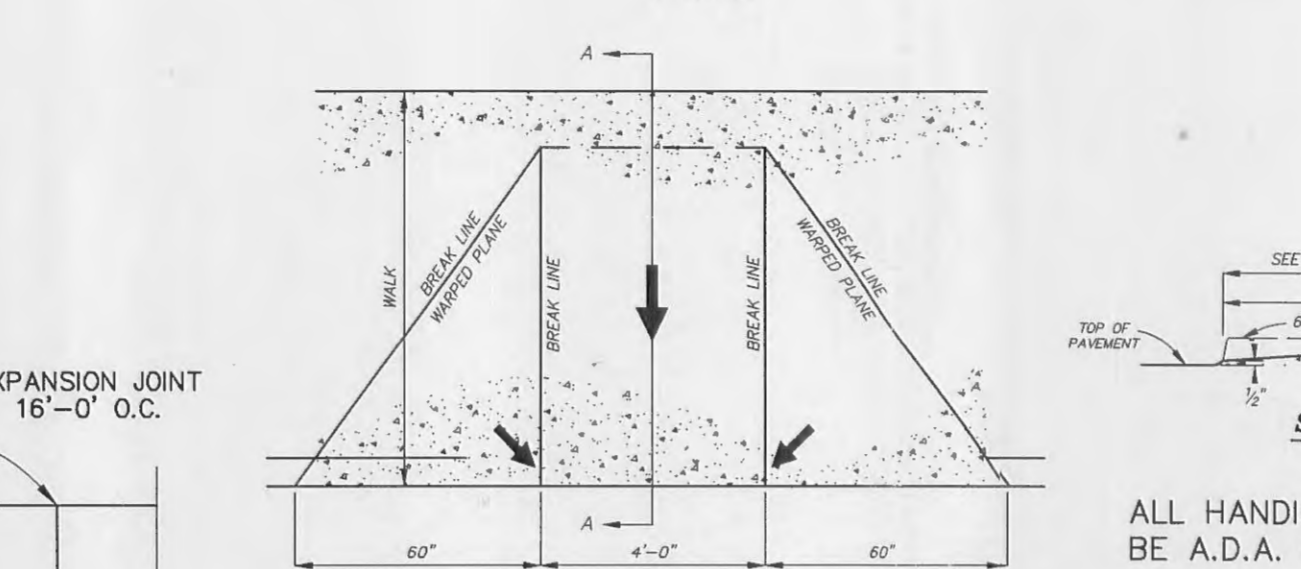


HANDICAPPED PARKING MARKING




STRAIGHT CURB HANDICAPPED RAMP DETAIL

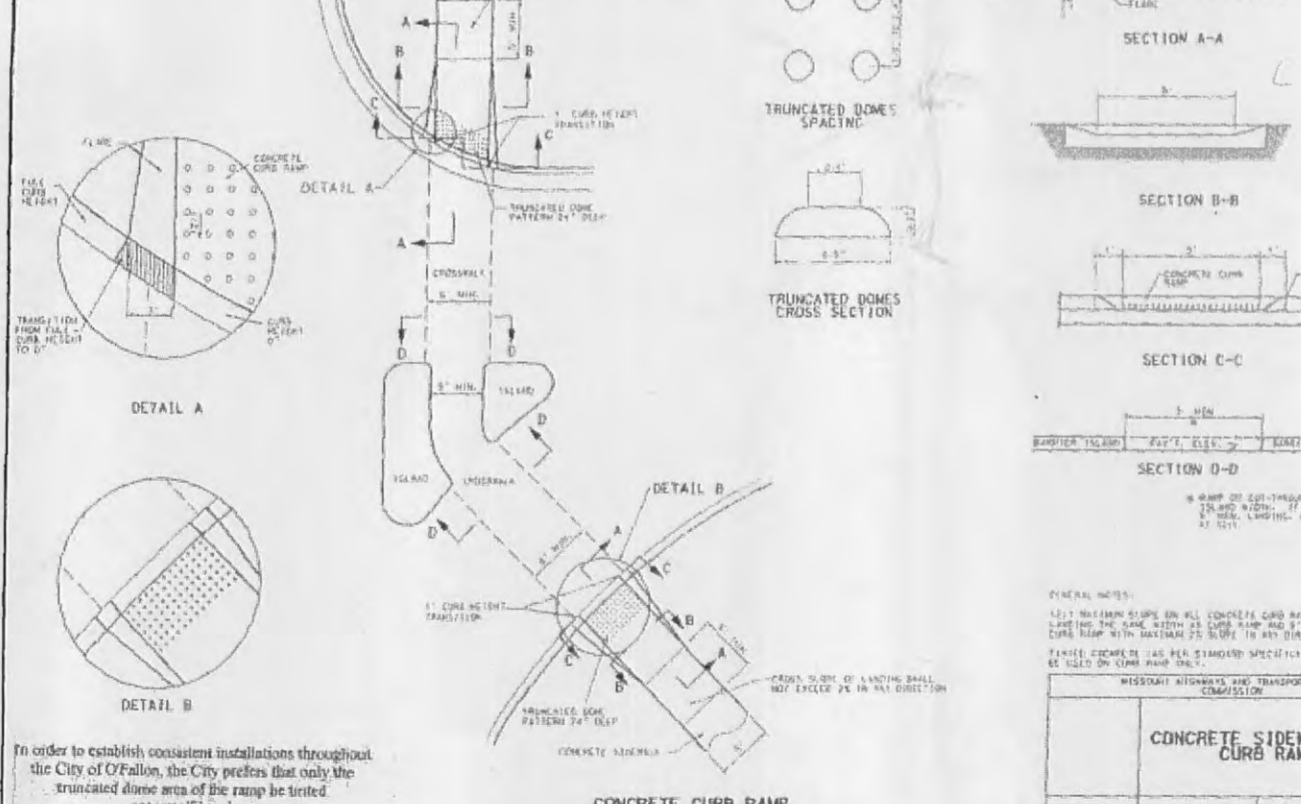


MULTI-USE TRAIL DETAIL

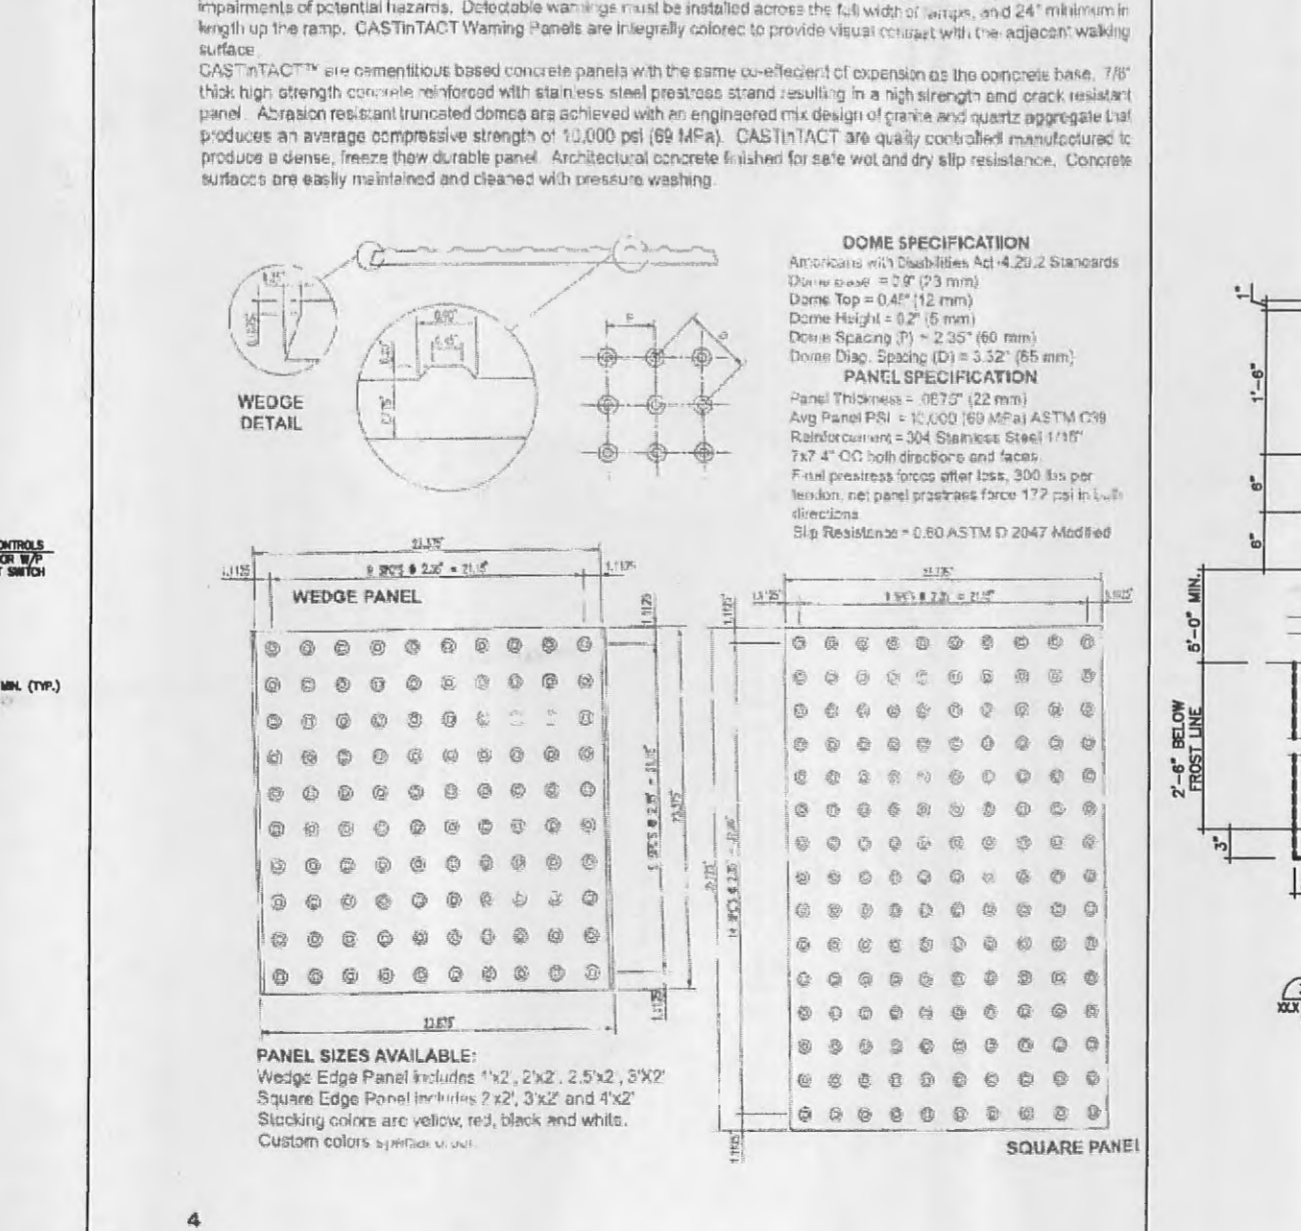


ACCESSIBLE PARKING SIGN AND POST (FREESTANDING)

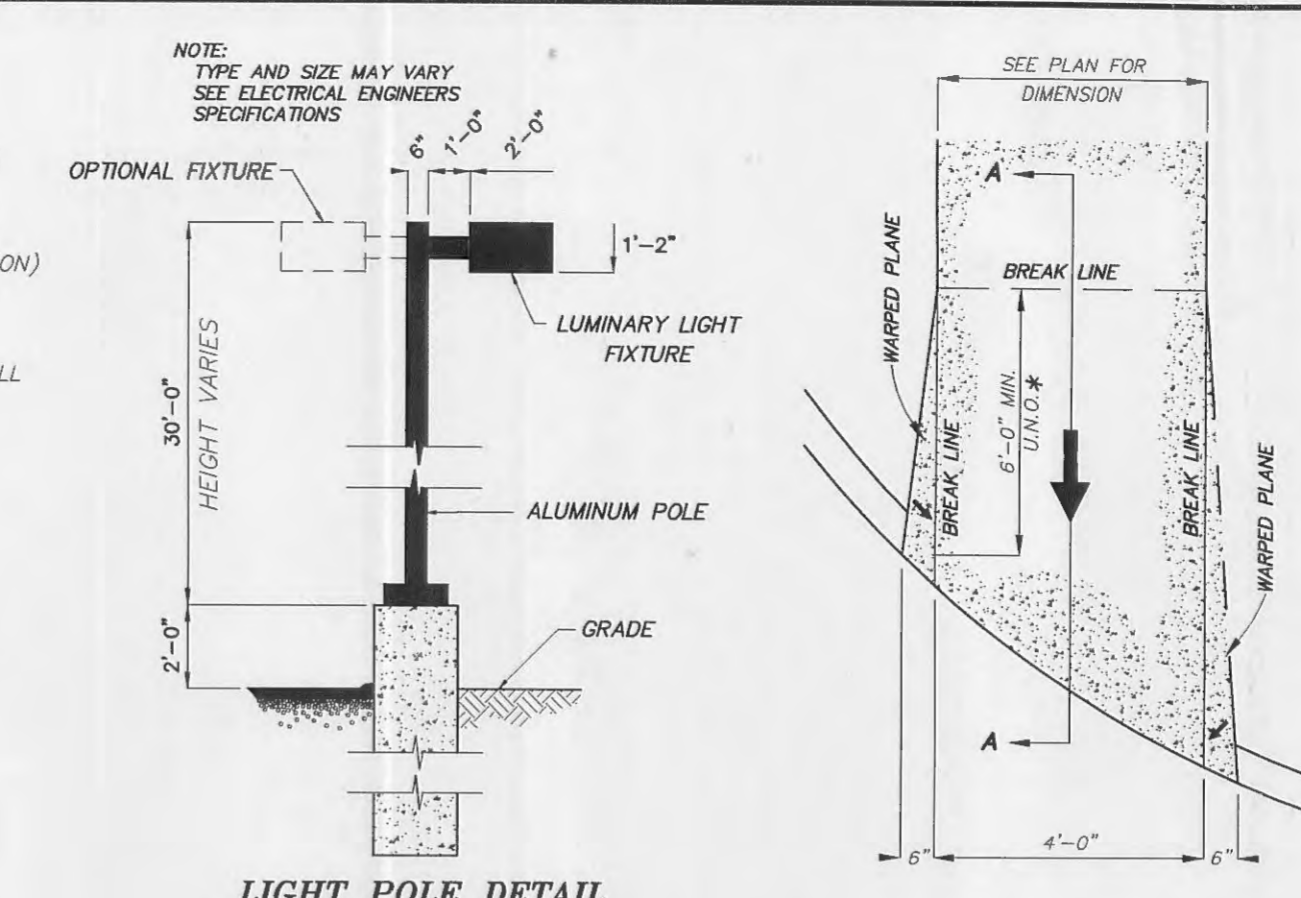


LIGHT POLE DETAIL

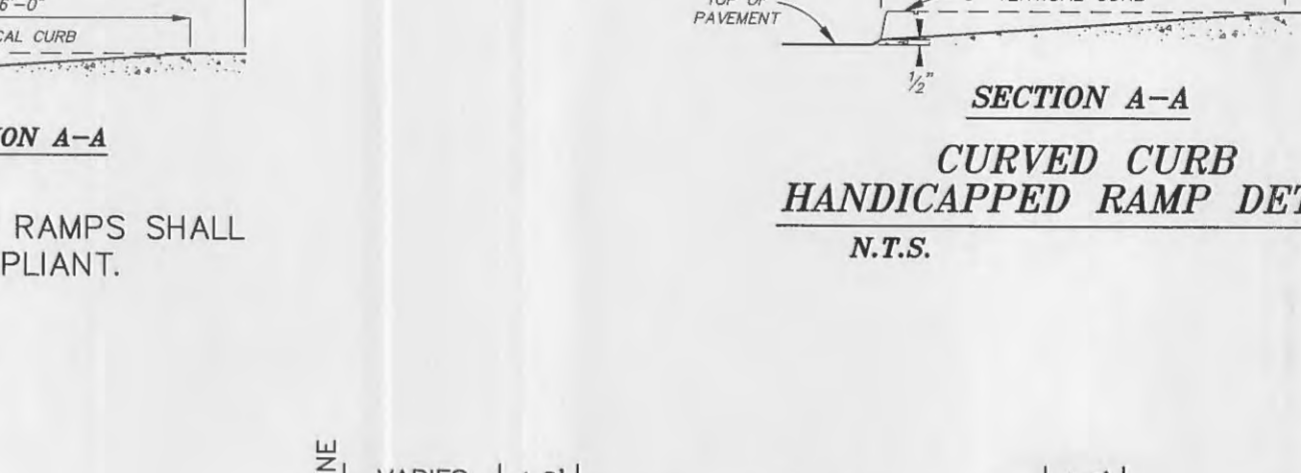

CURVED CURB HANDICAPPED RAMP DETAIL

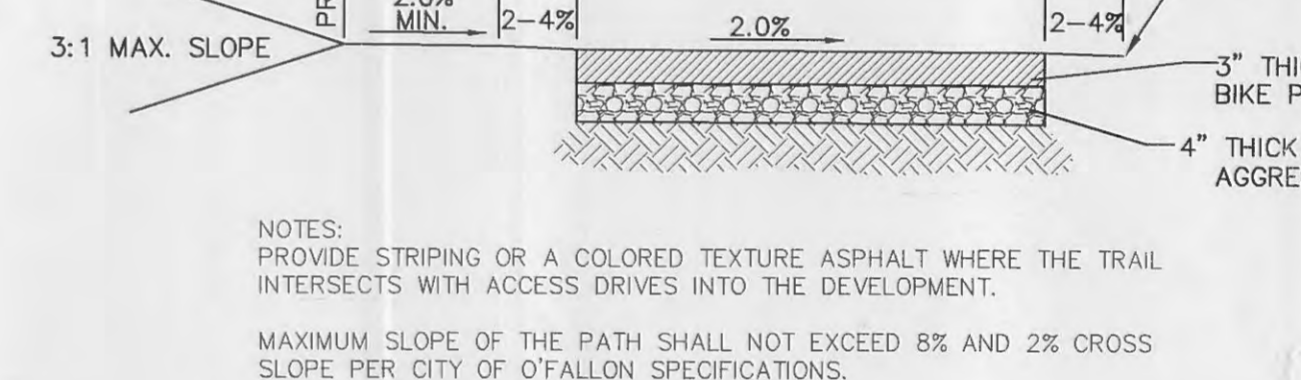

PROPOSED ENTRANCE CONCRETE PAVEMENT DETAIL

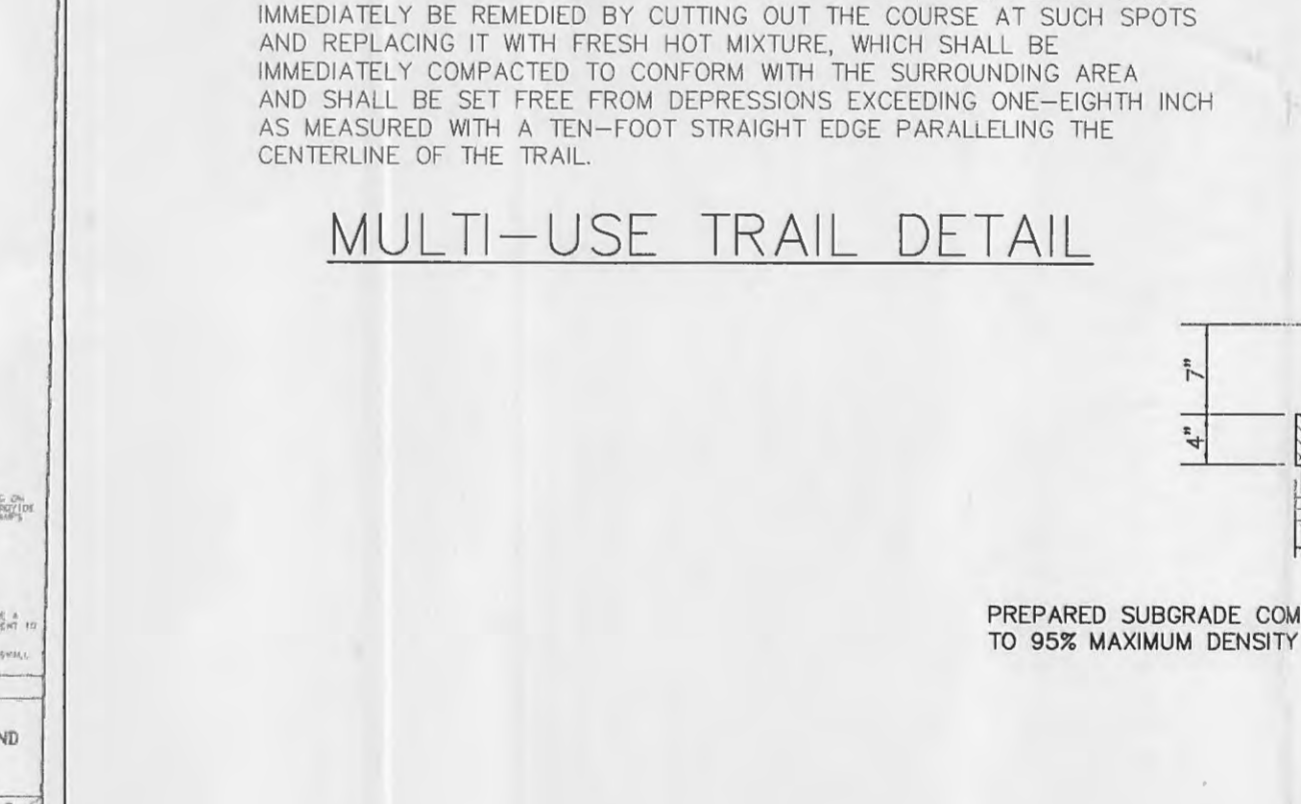

TECHNOLOGY BLVD. ENTRANCE

SITE NOTES

- All dimensions shown are to back of curb unless noted otherwise.
- DO NOT SCALE DRAWINGS, USE DIMENSIONS AS SHOWN.
- Additional siltation control may be required as directed by the City of O'Fallon.
- Storm sewers are to be private unless otherwise noted.
- Contractor to notify the engineer if discrepancies are found in the field compared to the design plans.
- All concrete and asphalt concrete pavement to be removed shall be sawcut on a straight line along the contact line with the existing pavement to remain. Concrete walks and curbs to be removed shall be sawcut at the nearest contraction or expansion joint.
- No work shall be done which will affect existing utilities prior to having ascertained that the utilities have been properly capped, plugged, or otherwise abandoned in a manner acceptable to the affected utility company. The appropriate agency shall be notified prior to the commencement of any work which will affect any existing utility. Removals or relocations by utility companies are to be initiated and coordinated by the Contractor.
- All site construction and sewer construction to be per City of O'Fallon and Duckett Creek standards and specifications.
- Building dimensions as shown are to outside face of building and are per architectural plans received during December 2008. See architectural plans for locations of building area walks, walls, etc. If all overall building dimensions vary from those shown on these plans, contact the engineer prior to proceeding with site construction.
- Conduct operations to prevent injury to adjacent buildings, structures, other facilities and persons. Signs, lights, and barricades shall be installed at all locations as necessary to guard against accident. Promptly repair damages caused to facilities by operations, as directed by the engineer and at no cost to the Owner.
- New pavement - The Contractor shall fine grade and proof roll the subgrade to the elevations as shown. Subgrade shall be compacted to densities noted. The base course and surface course shall be constructed in accordance with St. Louis County Standard Specifications for Highway Construction. The base course shall be Type 1 crushed rock and the compacted thickness shall be as shown on the drawings. Base course shall be compacted to densities noted. The asphalt surface wearing course shall be Type C asphaltic cement, penetration grade 85-100. Final rolled density shall not be below 95% of the average density of Marshall test laboratory specimens. Constructed thickness shall be within 1/4".
- Maintenance of finished asphaltic concrete surfacing will be required until acceptance of work by Owner.
- Pavement traffic marking to be one (1) coat of paint, white except as shown, and shall be chlorinated rubber based paint meeting Federal Specifications No. TT-P-115-2, Type III or equal. Application shall be 15 mils thick wet film (320 in. ft. of 4" stripe per gallon). All striping shall be per MUTCD.
- All sign post and backs and bracket arms shall be painted black using Carboline Rustbond Penetrating Sealer SG and Carboline 133 HP paint or equivalent as approved by City and MDDOT. Signs designating street name shall be on the opposite side of the street from traffic control signs.

PICKETT RAY & SILVER
CIVIL ENGINEERS
PLANNERS
LAND SURVEYORS

333 Mid Rivers Mall Drive
 St. Peters, MO 63376
 Phone (636) 397-1211
 Fax (636) 397-1104

1401 SOUTH BRENTWOOD, SUITE 100
 ST. LOUIS, MO 63144
 (314) 968-9988

Prepared For:
PACE PROPERTIES, INC.

Walgreens
 IMPROVEMENT PLANS
 O'FALLON, MISSOURI

REVISIONS

NO.	DATE	DESCRIPTION
1	02-06-07	PER WALGREENS COMMENTS
2	03-09-07	PER CITY OF O'FALLON COMMENTS
3	05-03-07	PER DUCKETT CREEK SEWER & PDS#2
4	05-21-07	PER DEVELOPER

ENGINEERS AUTHENTICATION

The responsibility for professional engineering liability on this project is hereby limited to the set of plans authenticated by the seal, signature, and date hereunder attached. Responsibility is disclaimed for all other engineering plans involved in this project and specifically excludes revisions after this date unless reauthenticated.

PICKETT, RAY & SILVER, INC.

STATE OF MISSOURI
REGISTERED PROFESSIONAL ENGINEER
 STEVE WILSON
 LICENSE NO. 20060-0000

DRAWN B.L.P. **DATE** 01-31-07
CHECKED D.L.S. **DATE** 01-31-07
PROJECT # 01045.PAPR.OOC
TASK # 2 **FIELD BOOK** 2001A

WALGREENS - O'FALLON IMPROVEMENT PLANS CONSTRUCTION DETAILS

SHEET 6 OF 9

Copyright 2006 by Pickett, Ray & Silver, Inc.