


NOTES:

1. FOR SYMBOLS, ABBREVIATIONS AND GENERAL NOTES, SEE DRAWING E501.
2. CONDUIT SHALL NOT BE INSTALLED IN MEZZANINE LEVEL CONCRETE FLOOR SLAB.
3. ALL TELEPHONE/DATA CONDUIT HOMERUNS FROM OUTLETS SHOWN ON THIS DRAWING SHALL BE ROUTED (IN CEILING BELOW) TO TELECOM RM. 154. SEE DRAWING E501 FOR LOCATION OF ROOM.
4. PROVIDE 4" SQUARE x 2-1/8" DEEP ELECTRICAL BOX WITH SINGLE GANG SQUARE CUT DEVICE RING AND BLANK COVERPLATE FOR TELE/DATA TO FUTURE DESK HOMERUN 1-1/4" EMPTY CONDUIT (WITH PULLWIRE) TO TELECOM RM. 154. SEE DRAWING E501 FOR LOCATION.
5. LOCATE IN ELEVATOR SHAFT WITHIN TWO FEET OF SPRINKLER HEAD.
6. DUCT SMOKE DETECTORS WILL BE FURNISHED AND INSTALLED IN DUCTWORK BY DIVISION 15. SEE HVAC DRAWINGS FOR LOCATIONS.
7. PROVIDE CONNECTION FROM FACTP TO RTU CONTROL PANEL FOR CONTROL OF SMOKE DAMPERS DURING ALARM CONDITION. DAMPERS SHALL FAIL CLOSED.
8. FURNISH AND INSTALL COLUMN CHASE AT EXPOSED COLUMN. SEE ARCHITECTURAL DRAWINGS FOR LOCATION AND LENGTH OF CHASE. FLUSH MOUNT BOX FOR DEVICE OR FUTURE IN COVER OF COLUMN CHASE AT INDICATED MOUNTING HEIGHTS. ROUTE CONDUIT CONCEALED INSIDE CHASE, DOWN INSIDE BLOCK WALL AND UNDERNEATH FLOOR SLAB TO RESPECTIVE DESTINATION.




Revision	Date	By	Description
1	12/9/02	DAM	ISSUED FOR BID

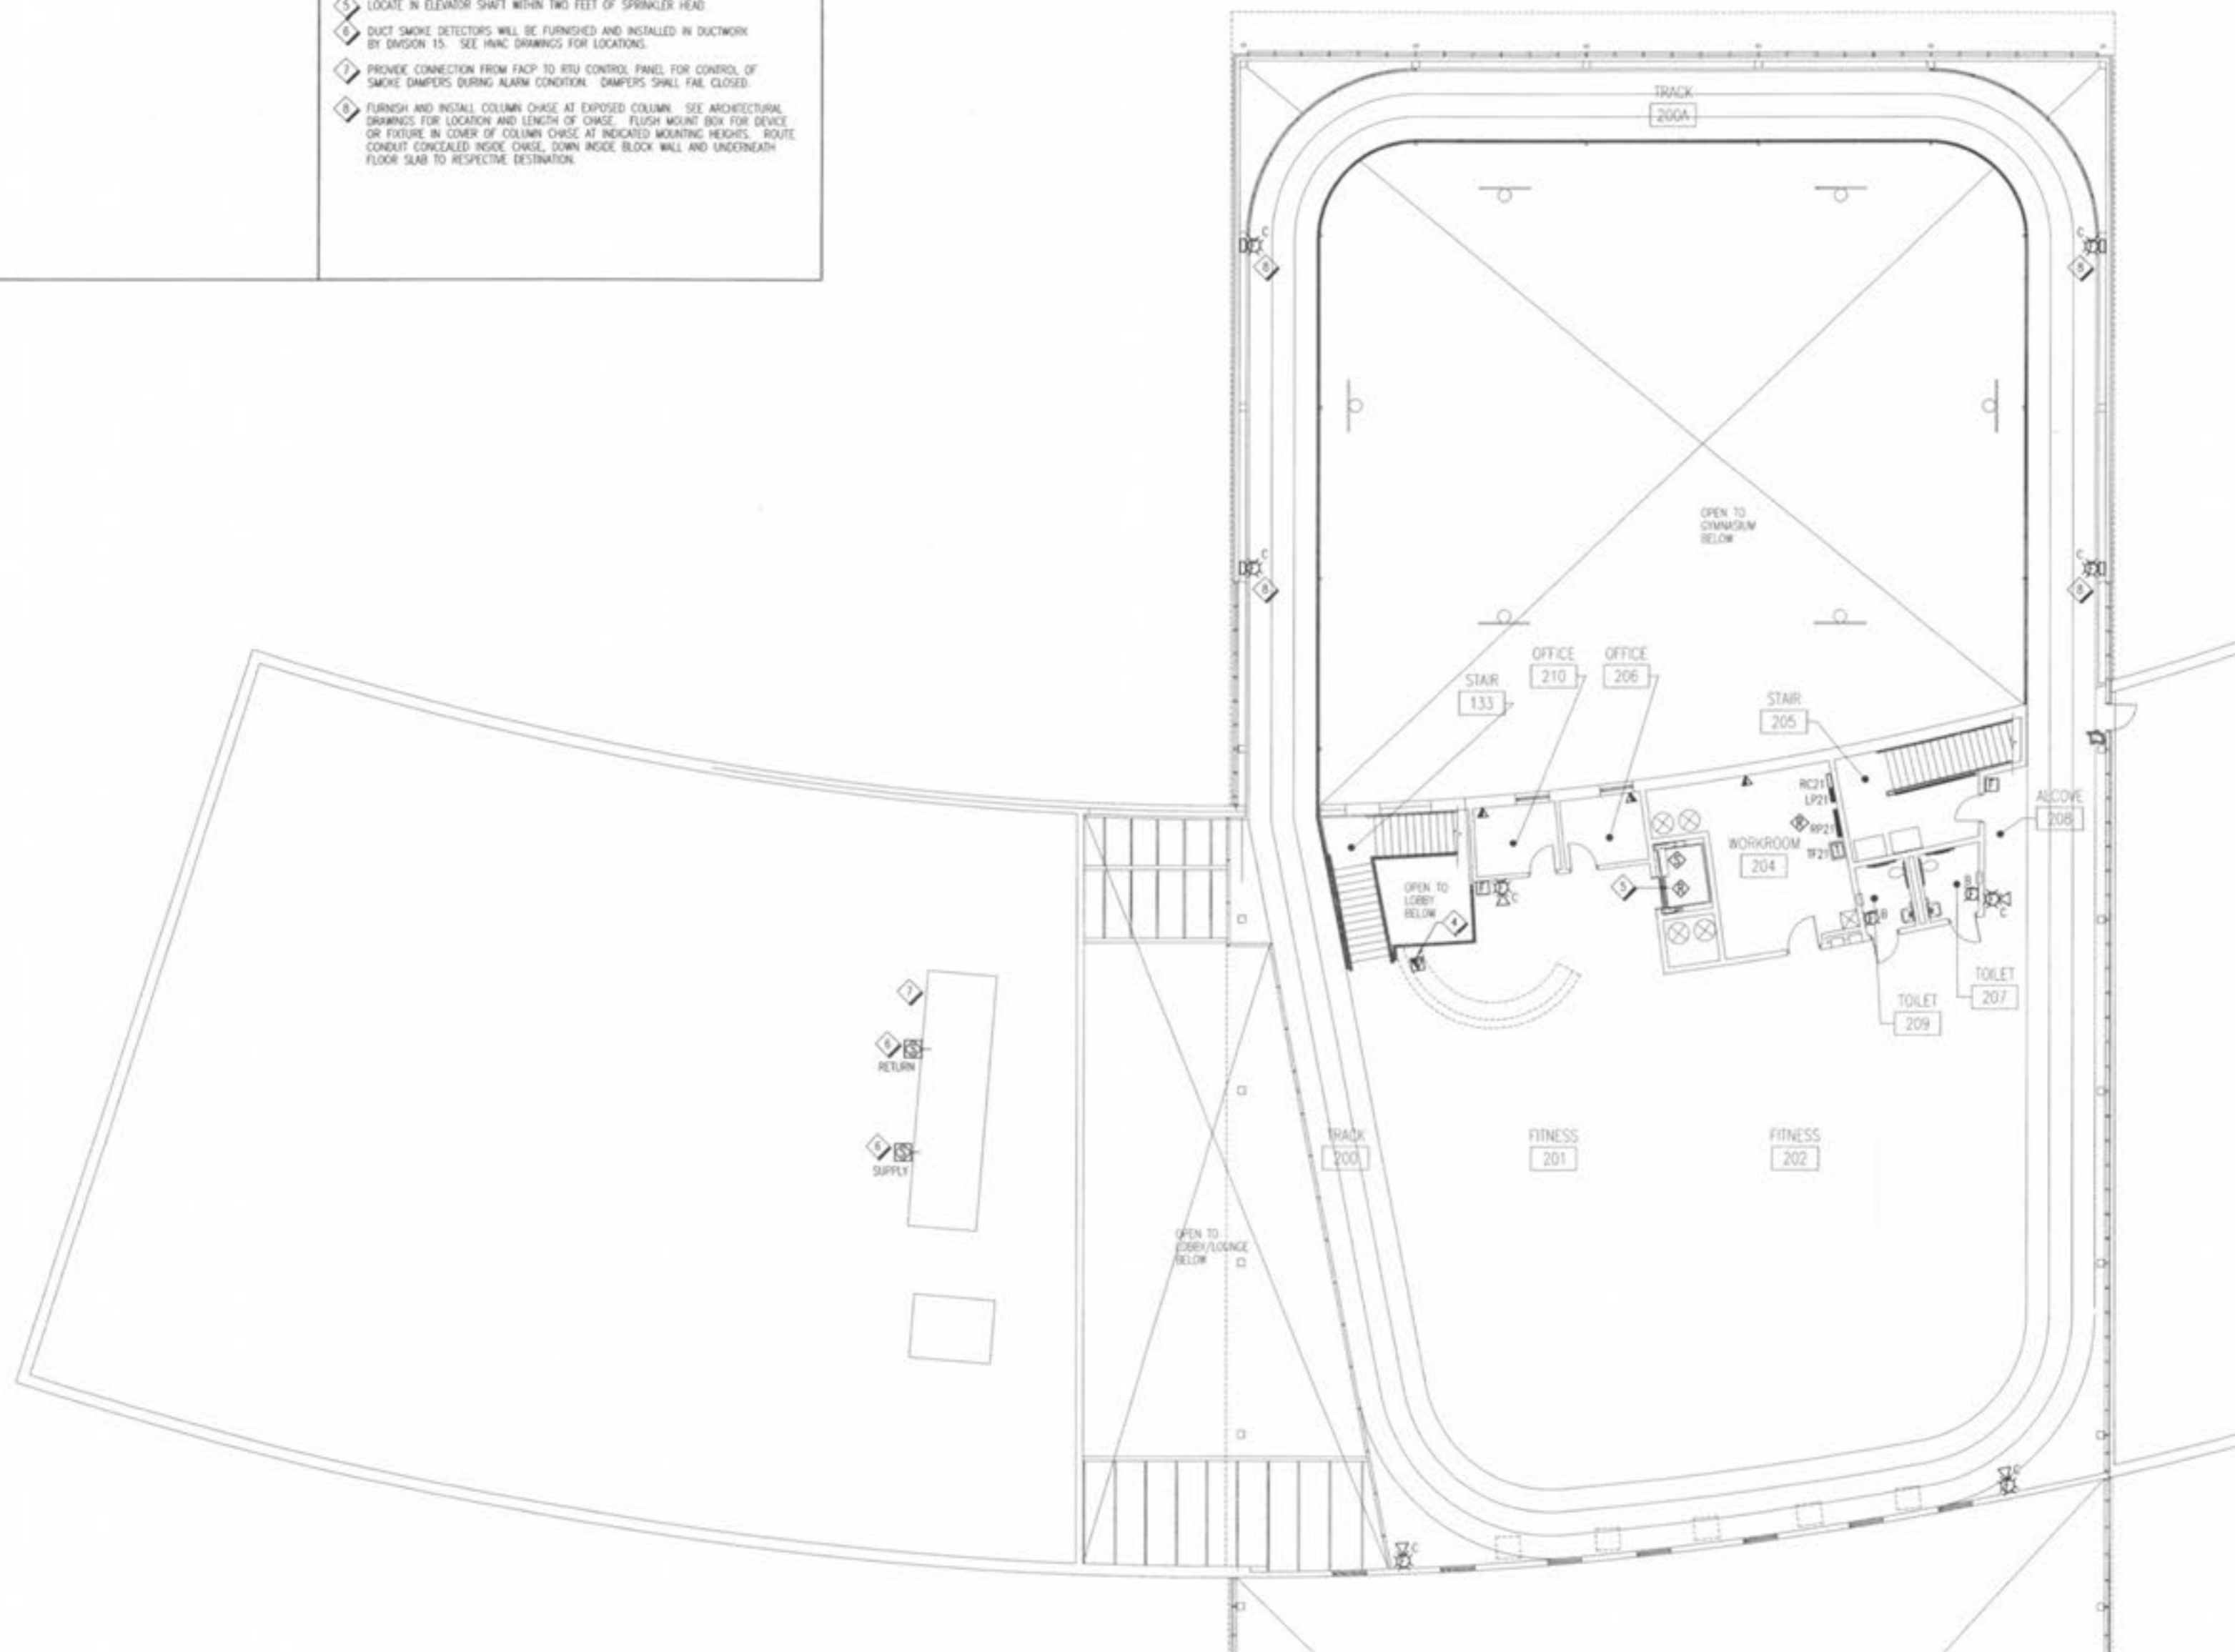

12.13.2002

RENAUD SPIRIT CENTER
For the City of O'Fallon - Missouri

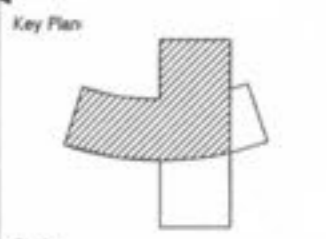

Jacobs Project No: **FW49600**
 Drawing Title: **ELECTRICAL MEZZANINE LEVEL NORTH-WEST SYSTEMS PLAN**
 Date: **DECEMBER 9, 2002**
 Designed By: **D. WENZEL** Drawing No:
 Drawn By: **D. WENZEL**
 Checked By: **F. HEDDT** **E503**

A1 MEZZANINE LEVEL NORTH-WEST SYSTEMS PLAN
E503 1/8" = 1'-0"