


NOTE!
 EXCESS EXCAVATION AT THE DETENTION BASIN SHALL BE MADE TO ACCOMMODATE FOR SEDIMENT STORAGE. WHEN THE DEVELOPMENT IS 75% COMPLETE OR AT THE TIME AS DIRECTED BY THE CITY OF OTTAWA, THE DETENTION BASIN BOTTOM SHALL BE BROUGHT UP TO JANEL GRADE TO PERMIT PROPER DRAINAGE OF THE BASIN.

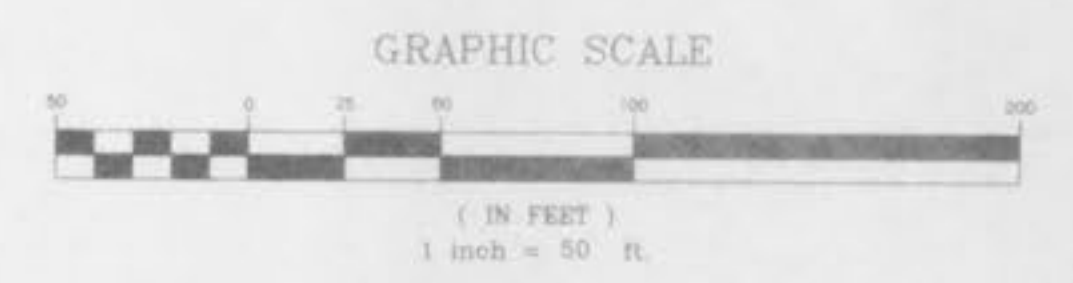

GRADING QUANTITY
 30,000 cu. yd. BID YARDAGE
 (includes 15% shrinkage)

The above yardage is an approximation only, NOT FOR BIDDING purposes. Contractors shall verify quantities prior to construction. It is the intent of the Engineer for the earthwork to balance onsite. The Engineer shall be notified if any difficulties arise in achieving the balance.