

MATERIALS

Retaining wall units shall be Versa-lok Mosaic block units as manufactured by Kirchner Block & Brick. The units are 18" wide x 8" tall x 12" deep with a split face finish. The color shall be chosen by the owner. Concrete wall units shall meet the requirements of ASTM C1372 except compressive strength shall be a minimum 3000 psi and the maximum water absorption shall be limited to 8.0 percent. The concrete shall have adequate freeze thaw resistance in accordance with ASTM C1262.

The reinforced wall backfill material shall be compacted rock. The rock shall be well graded crushed limestone with a maximum 2" particle size and a maximum of 10% passing the #200 sieve, similar to 2" minus gradation or limestone screenings.

The geogrids shall be Miragrid 3XT geogrid as indicated on the plans and as manufactured by TC Mirafi Group. The geotextile filter fabric shall be Mirafi 140NL.

The leveling pad shall be constructed of crushed limestone similar to 1" or 2" minus rock gradation.

The drainage rock shall be a free draining material such as 3/4" clean crushed limestone.

The drainage pipe shall be 4" HDPE tubing.

WALL FOUNDATION

Foundation soil shall be excavated as required for the leveling pad and the reinforced fill zone to the depths and locations shown on the plan sheet or as directed by the site engineer. The exposed foundation soil shall be observed by a qualified technician, engineer, or owner's representative prior to construction to verify that the exposed material is suitable for a net allowable bearing pressure as shown on the elevation views (with a factor of safety of 2.0), and that the base of the excavation is free of loose soil, shale, high plastic clays, uncompacted fill, water, or frozen material. Undercut any unsuitable soil. Undercut areas shall be filled with crushed limestone and compacted to at least 95% of the material's standard Proctor maximum dry density.

The foundation shall be proof rolled with 2 passes of a vibratory compactor prior to beginning retaining wall construction.

Construct the crushed rock leveling pad to lines and grades shown on the plans. The leveling pad shall be compacted in a maximum 6" lifts with 3 passes of a vibratory compactor.

WALL CONSTRUCTION

The Mosaic wall system consists of 3 wall units stacked in various panel patterns to form the retaining wall. The panel layout examples are shown on sheet 4 of 10. Each panel is 10" tall.

Install drainage rock extending 12" behind wall units.

Cap units shall be glued in place at the top of the wall.

GEOGRID REINFORCING

The geogrids shall be cut to design lengths and placed between the blocks at the elevations shown on the plans. The geogrid's primary strength direction will be directed perpendicular to the wall face (into the fill.) The geogrids placed outside a plus or minus 4" zone of the geogrid design elevation will not be accepted. The geogrid shall be placed horizontally and lay flat on the reinforced fill soil. The geogrid shall have a minimum of 11" of grid between the block layers. Slack in the geogrid shall be removed prior to placing additional backfill. The geogrids shall be installed in one continuous piece with no joints in the strength direction. The geogrids shall be placed side-by-side along the wall alignment with no overlap required.

WALL BACKFILL

Backfill shall be placed, spread, and compacted in such a manner that minimizes wrinkles and movement of the geogrid. Wall backfill material shall be placed in maximum 10" loose lifts and compacted to at least 95% of the material's maximum dry density as determined by the standard Proctor method (ASTM D698.) Field density testing shall be conducted by a qualified soils technician to verify that at least the minimum degree of compaction is being obtained. Testing methods, frequency, and verification of material specifications shall be the responsibility of the owner or the owner's representative. The drainage rock shall be compacted with a minimum 2 passes of a vibratory compactor and field density testing will not be required for the drainage rock. During backfill placement the 3 foot zone directly behind the wall shall be limited to the use of hand operated compaction equipment only.

Construction equipment shall not be operated directly on the geogrid.

FENCE

The fence posts shall be grouted into Sonotubes or PVC pipe sleeves. The sleeves shall be installed into the backfill during wall construction. The backfill shall be compacted around the sleeves. The geogrids shall be cut around the sleeves as necessary.

SCOPE OF THIS RETAINING WALL DESIGN

The retaining wall design includes a complete analysis of the internal stability of the retaining wall system and an external design analysis of the system's resistance to sliding and overturning in accordance with the NCM and/or AASHTO Section 5 guidelines. These retaining wall plans provide the bearing pressures that the wall exerts on the foundation soils. The owner or owner's representative shall verify that the foundation soils at the retaining wall location will provide the necessary bearing capacity to support the wall system. The global stability of the entire site, as well as at the retaining wall location, is outside the scope of the retaining wall design.

The erosion protection of the soil at the face of the wall and at the top of the wall is beyond the scope of this design. Design of pipes, manholes, light standards, signs, guard rails, fences, curbs, and other materials around the retaining wall are beyond the scope of this design. Details on our plans that show any of these items are intended only for the wall contractor to know how to construct the retaining wall at these structures.

The contractor is strictly responsible for the construction means, methods, techniques, sequences or procedures, and the safety precautions and programs connected with the work.


PROTECTION OF WORK

The surface of the wall backfill shall be graded at the end of each day of work to provide positive surface drainage away from the wall. Grading shall include proper contouring of soils in adjacent areas to prevent the flow of surface water into the reinforced earth zone and to prevent to flow of surface water along the front face of the wall.


The design of the walls is based on conditions and loads imposed on the wall at completion of the project. Prior to project completion, the wall is vulnerable to damages caused by construction activity adjacent to the wall. Of particular concern is the use of grading and pavement construction equipment on the reinforced backfill at the top of the wall. Only equipment with a weight not exceeding one ton can be used in the 3 foot zone directly behind the back of the wall face.

Prior to the wall construction exceeding 5' in height the soil at the face of the wall shall be placed and compacted to the final grades. There shall be a minimum 2' wide flat area at the face of the wall and the soil shall slope away from the wall.

No changes shall be made to these plans without the written approval of Aspen Consultants.

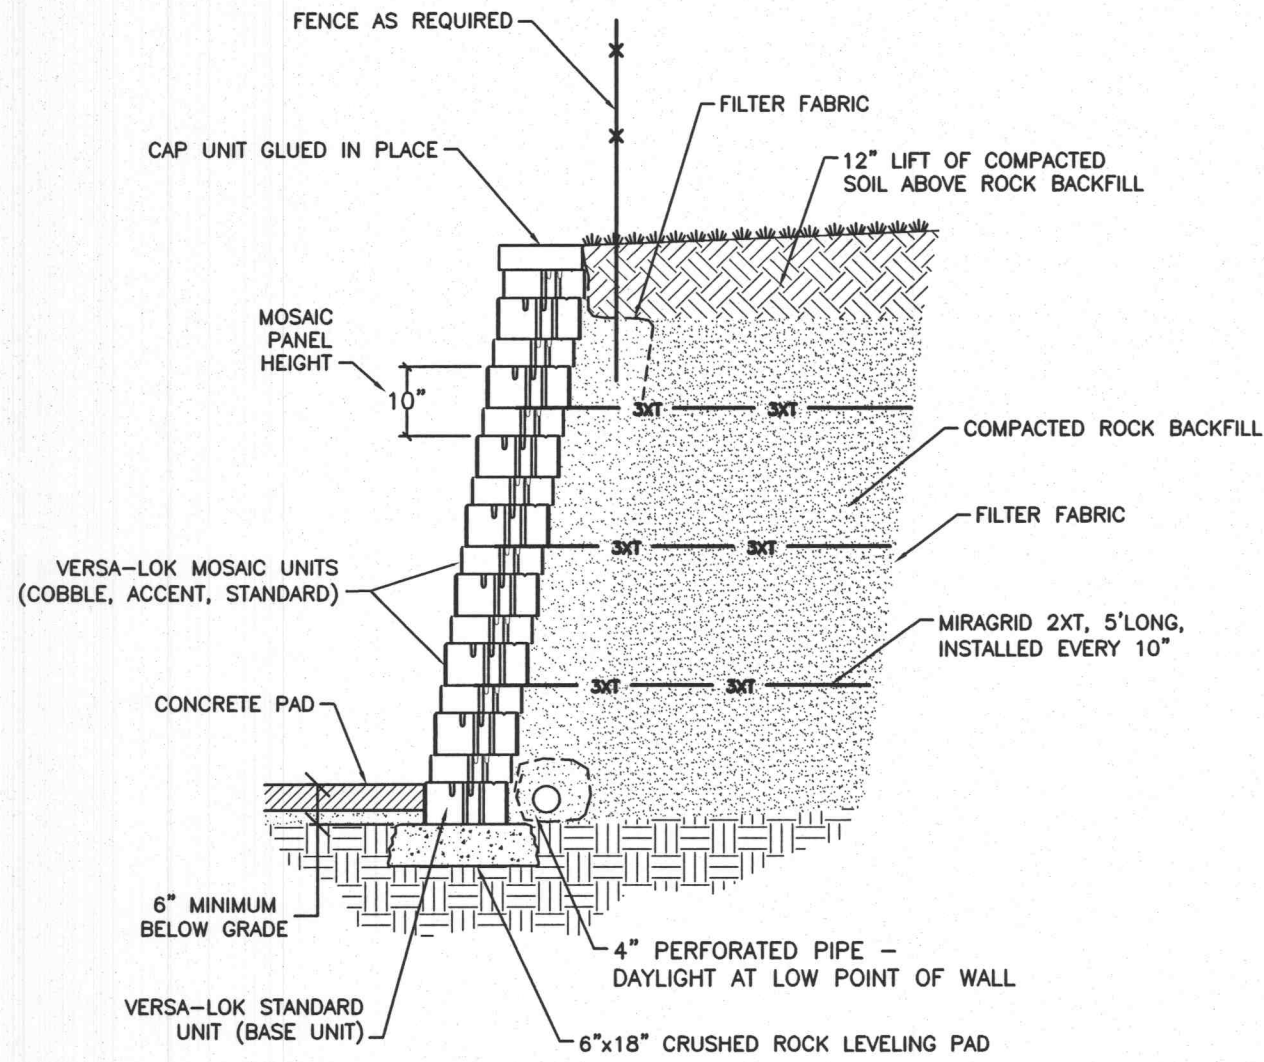


TYPICAL SECTION
NOT TO SCALE

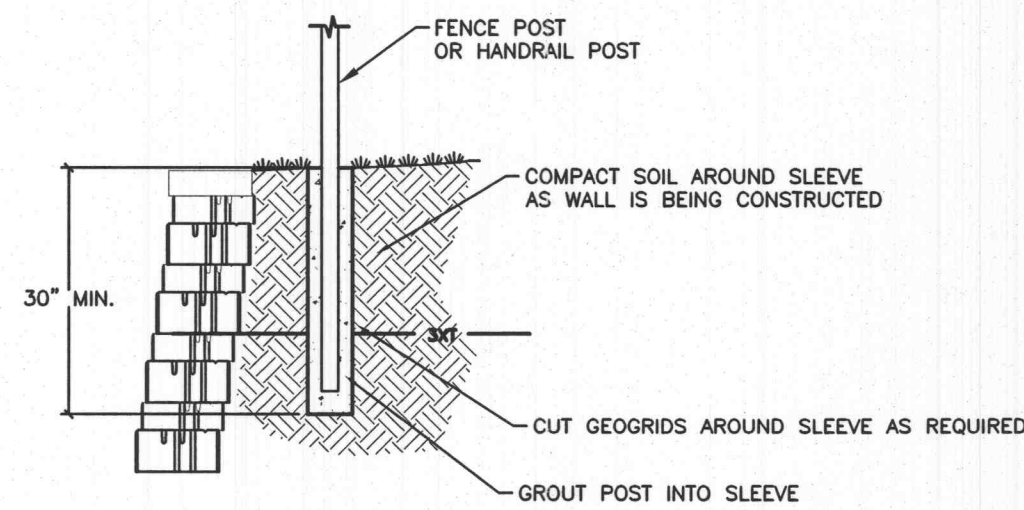


FENCE DETAIL
NOT TO SCALE

-PLACE SONOTUBE IN FILL AS BACKFILL IS BEING COMPACTED
-THE FENCE DESIGN AND SUITABILITY IS THE RESPONSIBILITY OF OTHERS

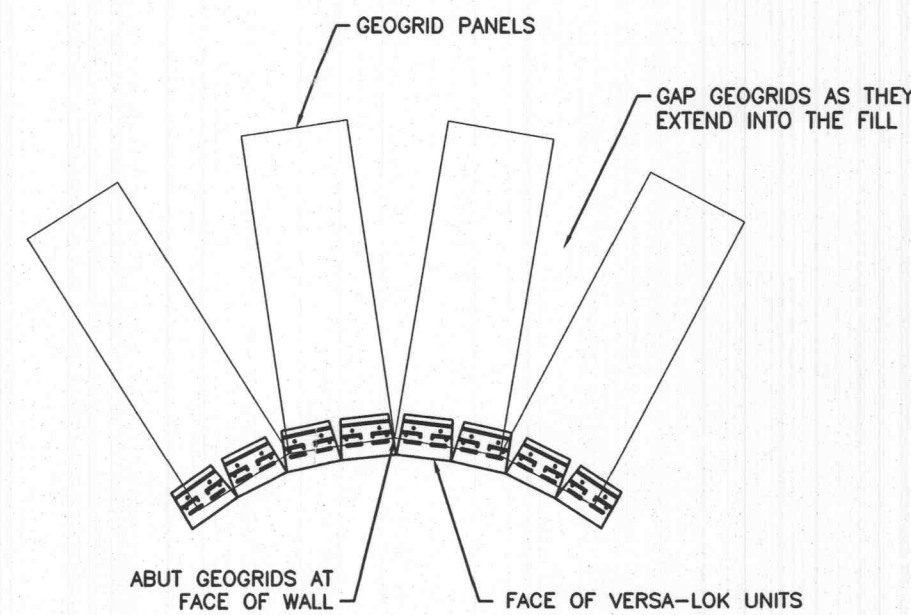


INSIDE RADIUS
NOT TO SCALE

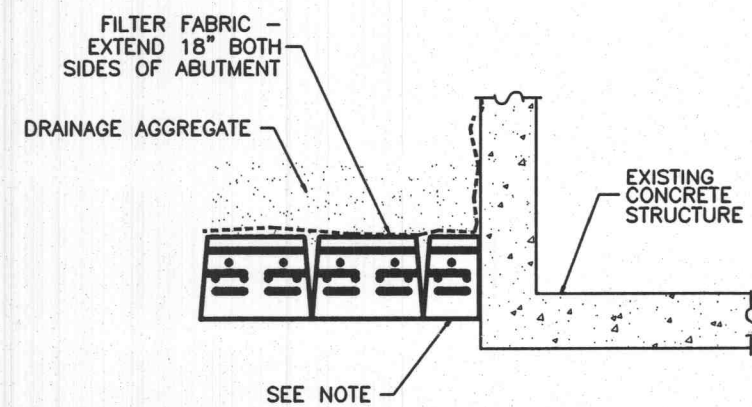


ABUTMENT DETAIL
NOT TO SCALE


- NOTE:
1. AT ABUTMENT, ALTERNATE FULL UNIT WITH HALF UNIT EVERY OTHER COURSE
2. CUT UNITS FLUSH WITH CONCRETE WALL
3. DO NOT ATTACH VERSA-LOK UNITS TO OTHER STRUCTURES.

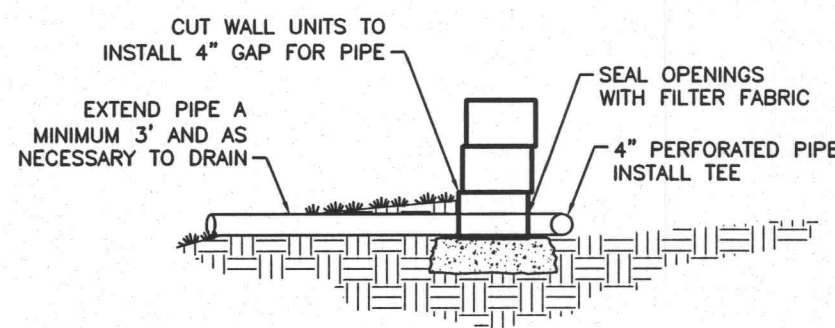


PERFORATED PIPE OUTLET
NOT TO SCALE

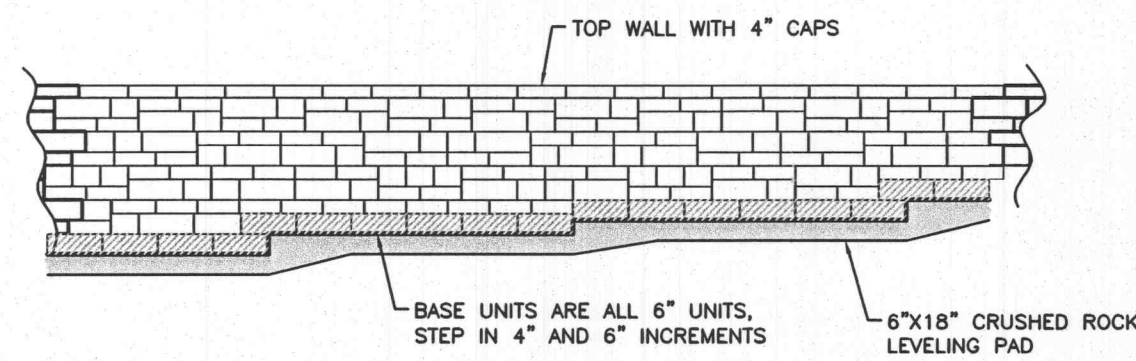


MOSAIC STEP DETAIL
NOT TO SCALE

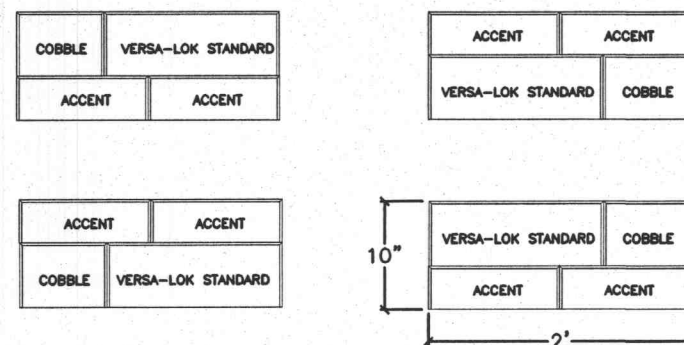


PANEL ARRANGEMENTS
NOT TO SCALE

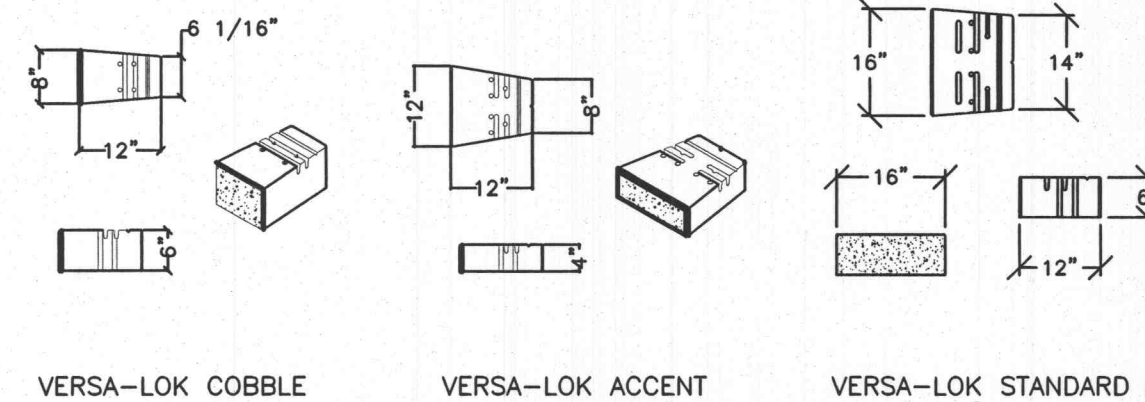

MOSAIC BLOCK DETAIL
NOT TO SCALE

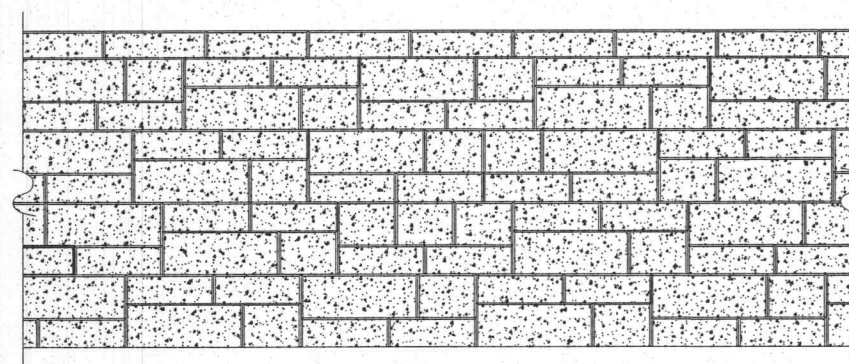

RANDOM PATTERN MOSAIC
NOT TO SCALE

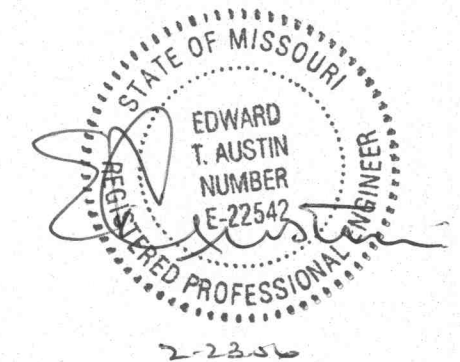

293 Northwest Blvd., Fenton, MO 63026
Phone: (636) 349-2225 Fax: (636) 349-2230

WINGHAVEN COUNTRY CLUB
O'Fallon, MO

MOSAIC WALL | DETAILS AND SPECS

Revision: | Date: 2-9-2006
Revision: | Sheet: 2 of 2