LANDSCAPE SCHEDULE

SYMBOL site function	COMMON NAME botanical name	MINIMUM SIZE/ HEIGHT/SPREAD	SPACING	COMMENTS
landscape bed	*CRIMSON PYGMY BARBERRY berberis thunbergii*	*3 GAL. 12"ø X 15" HT MIN*	*18" C/C*	*SEE LANDSCAPE SHEET FOR BED LOCATIONS, DETAILS AND PLANT SPACING*
landscape bed	*SEA GREEN JUNIPER juniperus sabina (VERTICAL VARIETY)*	*5 GAL. 24"ø X 24" HT MIN*	*24" C/C*	
screening tree	*SCOTS PINE pinus sylvestris*	*1" CALIPER 6' MINIMUM HT*		*VERIFY TREE TYPE, LOCATION, SIZE, HEIGHT, AND SPREAD WITH QT REPRESENTATIVE PRIOR TO INSTALLATION*
fill tree	*ARISTOCRAT PEAR pyrus calleryana*	*1-1/2" CALIPER 12' HT*		
frontage tree	*SKYLINE HONEY LOCUST gleditsia triacanthos (skyline)*	*3" CALIPER 15'*		
SOD MULCH	*FESCUE CYPRUS MULCH*			



LANDSCAPE NOTES:

THERE ARE NO EXISTING TREES ON SITE.

REQUIRED LANDSCAPING:

1 TREE FOR EACH 40' OF STREET FRONTAGE
460' OF STREET FRONTAGE = 12 TREES

1 TREE FOR EACH 3000 S.F. OF OPEN SPACE
11,579 S.F. OF OPEN SPACE = 4 TREES

REQUIRED TO PROVIDE 16 TREES
PROVIDING 22 TREES

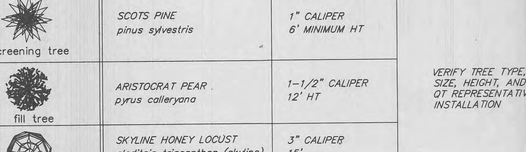

ALTERNATE EDGE OF LANDSCAPE BED DETAIL
WHEN ADJACENT TO SIDEWALK OR CURB



EDGE OF LANDSCAPE BED DETAIL
WHEN ADJACENT TO SOD AREA

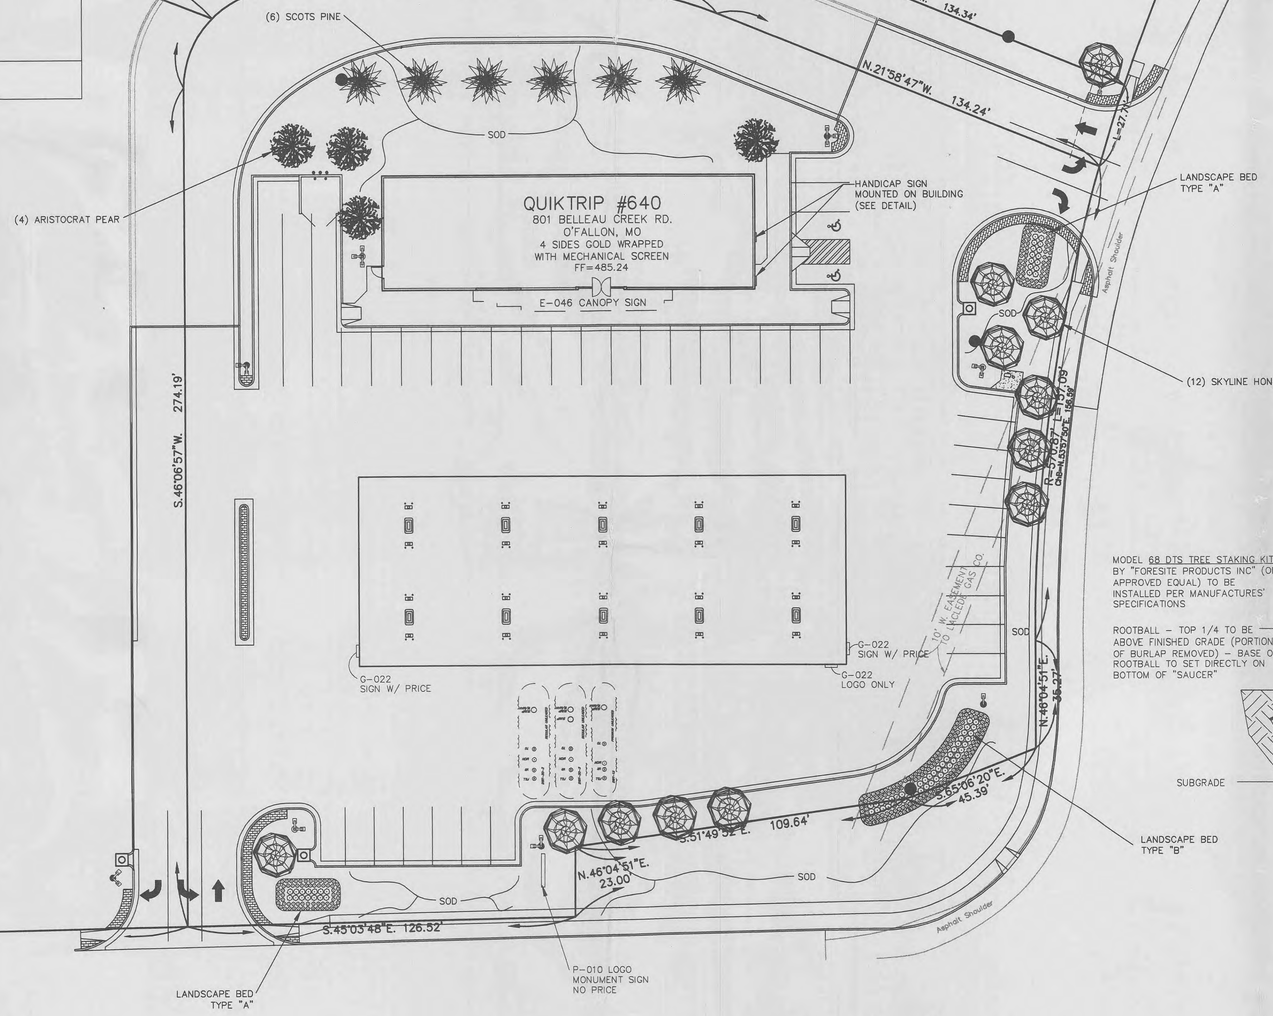

NOTE: ALL TREES AND LANDSCAPE BEDS ARE TO BE PLACED A MINIMUM OF 6' FROM THE FACE OF CURB, UNLESS NOTED OTHERWISE

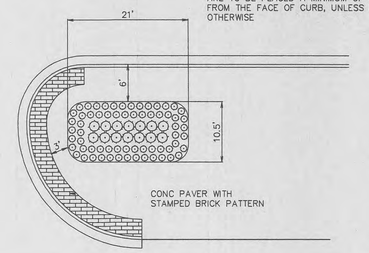

LANDSCAPE BED TYPE "A"

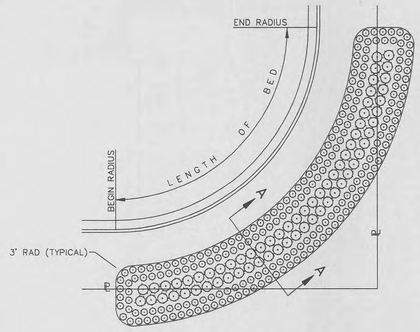

LANDSCAPE BED TYPE "B"

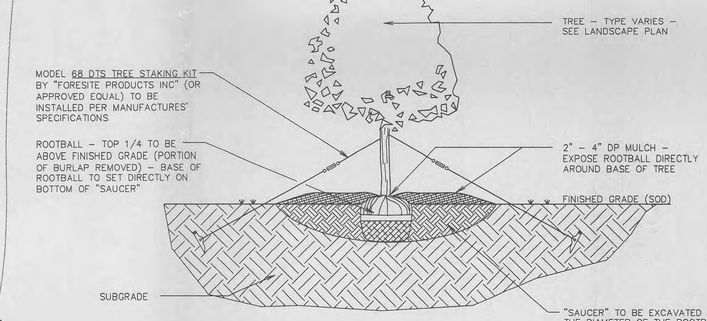

TREE PLANTING DETAIL FOR
TREES 3"ø OR GREATER

NOTE: TREES THAT ARE LESS THAN 3"ø SHALL BE SECURED WITH TYPICAL WIRE/TWINE SUPPORTS FASTENED TO WOOD STAKES AT THE GROUND AND PADDED AROUND THE TREE TRUNK WITH RUBBER HOSE. STAKES SHALL BE DRIVEN SO AS TO PROTUDE 2" ± ABOVE GROUND LEVEL



TYPICAL STEEL EDGING DETAIL

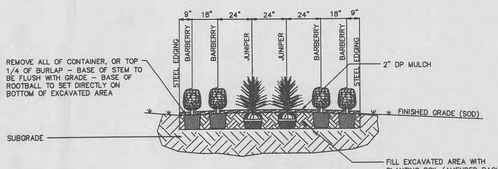

SHRUB PLANTING DETAIL
(SECTION A - A)

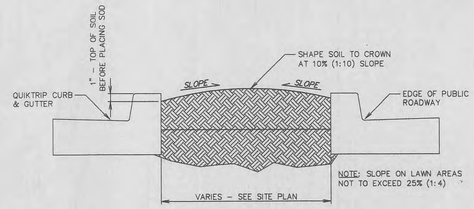

LAWN SECTION

Call Before you DIG
TOLL FREE
1-800-344-7483
MISSOURI ONE-CALL SYSTEM INC.

Underground facilities, structures and utilities have been plotted from available surveys, records and information, and therefore, do not necessarily reflect the actual existence, non-existence, size, type, number of, or location of these facilities, structures, and utilities. The Contractor shall be responsible for verifying the actual location of all underground facilities, structures, and utilities, either shown or not shown on these plans. The underground facilities, structures, and utilities shall be located in the field prior to any grading, excavation or construction of improvements. These provisions shall in no way absolve any party from complying with the Underground Facility Safety and Damage Prevention Act, Chapter 319, RSMO.

The original of this drawing is on file at the office of The Clayton Engineering Company. Any modifications to this drawing shall release said Clayton Engineering Company, the Engineer and/or the Surveyor whose seal appears hereon from any liability resulting from said unauthorized modifications.

5.	3/1/01	AJM	REVISED PER MoDOT
4.	1/18/01	AJM	REVISED PER CITY
3.	1/3/01	AJM	REVISED PER QUIKTRIP & CITY
2.	12/12/00	AJM	REVISED PER QUIKTRIP
1.	11/9/00	AJM	REVISED PER QUIKTRIP

REVISIONS

QUIKTRIP CORPORATION
2255 BLUESTONE DRIVE
ST. CHARLES, MO. 63303
PH # (636) 916-5706
FAX # (636) 916-5754

QUIKTRIP #640
LANDSCAPE PLAN

801 BELLEAU CREEK ROAD — O'FALLON, MISSOURI 63366

the clayton engineering company, inc.
ENGINEERS • SURVEYORS • PLANNERS
11920 WESTLINE INDUSTRIAL DRIVE
ST. LOUIS, MISSOURI 63146
(314) 692-8888 FAX: (314) 692-8888
clayton-engineering.com

Designed	EEK/AJM
Drawn	AJM
Checked	DAC
Date	10/10/00
Project Number	99301
Sheet Number	3 of 11

F.S.	F.B.	SUR.	FILE P:\99301\PLANS\CONST01.DWG	PLOTTED 03/01/2001 11:26 AM