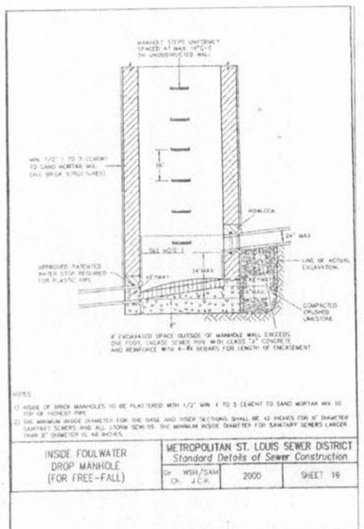

NOTES:
1) INSIDE OF BRICK MANHOLES TO BE PLASTERED WITH 1/2" MIN. 1 TO 3 CEMENT TO SAND MORTAR MIX TO TOP OF HIGHEST PIPE.
2) THE MINIMUM INSIDE DIAMETER FOR THE BASE AND RISER SECTIONS SHALL BE 42 INCHES FOR 8" DIAMETER SANITARY SEWERS AND ALL STORM SEWERS. THE MINIMUM INSIDE DIAMETER FOR SANITARY SEWERS LARGER THAN 8" DIAMETER IS 48 INCHES.

INSIDE FOULWATER DROP MANHOLE (FOR FREE-FALL)	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. WSH/SAM Ch. JCK	2000	SHEET 19

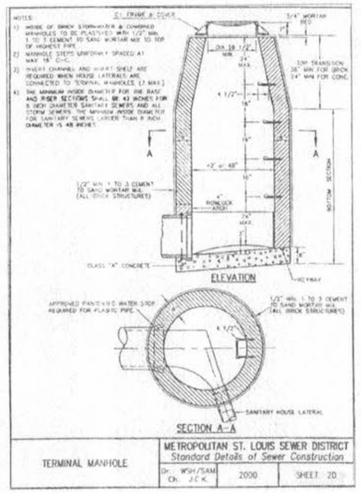

NOTES:
1) INSIDE OF BRICK STORMWATER & COMBINED MANHOLES TO BE PLASTERED WITH 1/2" MIN. 1 TO 3 CEMENT TO SAND MORTAR MIX TO TOP OF HIGHEST PIPE.
2) MANHOLE STEPS UNIFORMLY SPACED AT MAX 16" O.C.
3) INVERT CHANNEL AND INVERT SHELF ARE REQUIRED WHEN HOUSE LATERALS ARE CONNECTED TO TERMINAL MANHOLES. (7 MAX.)
4) THE MINIMUM INSIDE DIAMETER FOR ONE BASE AND RISER SECTIONS SHALL BE 42 INCHES FOR 8 INCH DIAMETER SANITARY SEWERS AND ALL STORM SEWERS. THE MINIMUM INSIDE DIAMETER FOR SANITARY SEWERS LARGER THAN 8" INCH DIAMETER IS 48 INCHES.

TERMINAL MANHOLE	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. WSH/SAM Ch. JCK	2000	SHEET 20

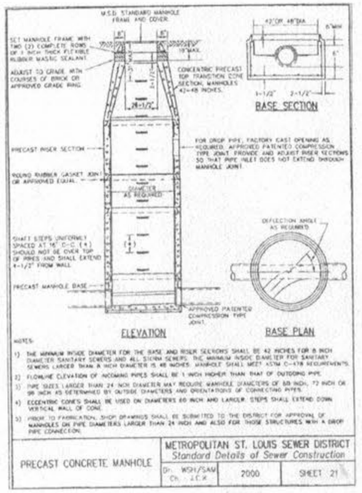

NOTES:
1) THE MINIMUM INSIDE DIAMETER FOR THE BASE AND RISER SECTIONS SHALL BE 42 INCHES FOR 8 INCH DIAMETER SANITARY SEWERS AND ALL STORM SEWERS. THE MINIMUM INSIDE DIAMETER FOR SANITARY SEWERS LARGER THAN 8 INCH DIAMETER IS 48 INCHES. MANHOLE SHALL MEET ASTM C-478 REQUIREMENTS.
2) FLOWLINE ELEVATION OF INCOMING PIPES SHALL BE 1 INCH HIGHER THAN THAT OF OUTGOING PIPE.
3) PIPE SIZES LARGER THAN 24 INCH DIAMETER MAY REQUIRE MANHOLE DIAMETERS OF 60 INCH, 72 INCH OR OR INCH AS DETERMINED BY OUTSIDE DIAMETERS AND ORIENTATIONS OF CONNECTING PIPES.
4) ECCENTRIC CONE'S SHALL BE USED ON DIAMETERS 60 INCH AND LARGER. STEPS SHALL EXTEND DOWN VERTICAL WALL OF CONE.
5) PRIOR TO FABRICATION, SHOP DRAWINGS SHALL BE SUBMITTED TO THE DISTRICT FOR APPROVAL OF MANHOLES ON PIPE DIAMETERS LARGER THAN 24 INCH AND ALSO FOR THOSE STRUCTURES WITH A DROP PIPE CONNECTION.

PRECAST CONCRETE MANHOLE	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. WSH/SAM Ch. JCK	2000	SHEET 21

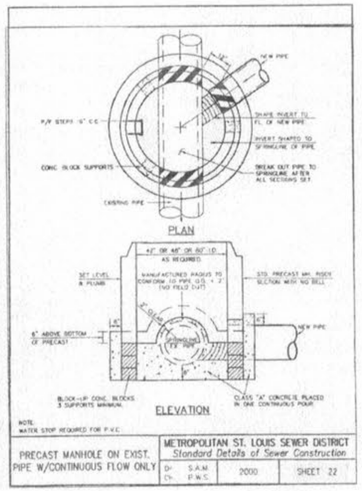

NOTE:
WATER STOP REQUIRED FOR P.V.C.

PRECAST MANHOLE ON EXIST. PIPE W/CONTINUOUS FLOW ONLY	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. S.A.M. Ch. P.W.S.	2000	SHEET 22

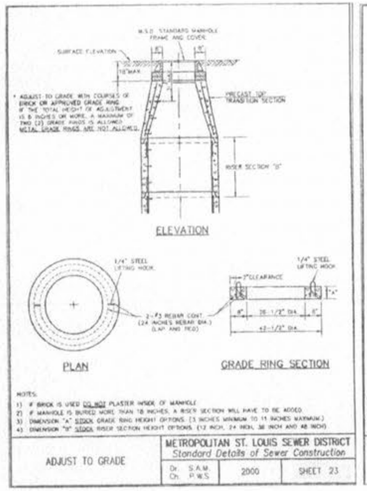

NOTES:
1) IF BRICK IS USED DO NOT PLASTER INSIDE OF MANHOLE.
2) IF MANHOLE IS BURIED MORE THAN 18 INCHES, A RISER SECTION WILL HAVE TO BE ADDED.
3) DIMENSION "A" SHOWN GRADE RING HEIGHT OPTIONS. (3 INCHES MINIMUM TO 11 INCHES MAXIMUM.)
4) DIMENSION "B" SHOWN RISER SECTION HEIGHT OPTIONS. (12 INCH, 24 INCH, 36 INCH AND 48 INCH)

ADJUST TO GRADE	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. S.A.M. Ch. P.W.S.	2000	SHEET 23

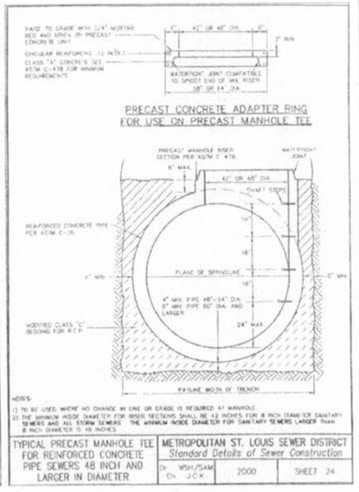

NOTE:
1) TO BE USED WHERE NO CHANGE IN LINE OR GRADE IS REQUIRED AT MANHOLE.
2) THE MINIMUM INSIDE DIAMETER FOR INSIDE SECTIONS SHALL BE 42 INCHES FOR 8 INCH TRUNK/TER SANITARY SEWERS AND ALL STORM SEWERS. THE MINIMUM INSIDE DIAMETER FOR SANITARY SEWERS LARGER THAN 8 INCH DIAMETER IS 48 INCHES.

TYPICAL PRECAST MANHOLE TEE FOR REINFORCED CONCRETE PIPE SEWERS 48 INCH AND LARGER IN DIAMETER	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. WSH/SAM Ch. JCK	2000	SHEET 24

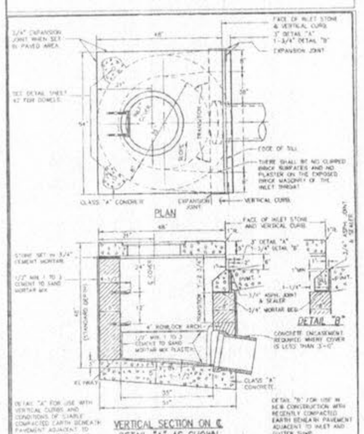

NOTE:
STANDARD DEPTH = 4.0 FEET.

UNTRAPPED STREET INLET BRICK CONSTRUCTION	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. WSH/SAM Ch. JCK	2000	SHEET 25

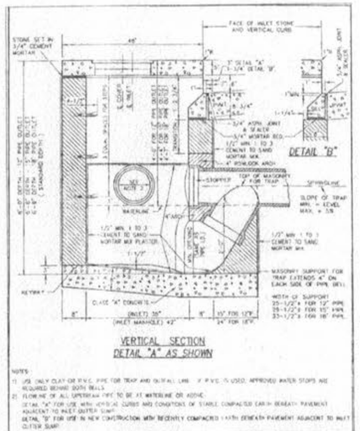

NOTES:
1) USE ONLY CLAY OR P.V.C. PIPE FOR TRAP AND OUTLET LINE. IF P.V.C. IS USED, APPROVED WATER STOPS ARE REQUIRED BEHIND BOTH WALLS.
2) FLOWLINE OF ALL UPSTREAM PIPE TO BE AT WATERLINE OR ABOVE.
DETAIL "A" FOR USE WITH VERTICAL CURBS AND CONDITIONS OF STABLE COMPACTED EARTH BENEATH PAVEMENT ADJACENT TO INLET GUTTER SLOPE.
DETAIL "B" FOR USE IN NEW CONSTRUCTION WITH RECENTLY COMPACTED EARTH BENEATH PAVEMENT ADJACENT TO INLET AND GUTTER SLOPE.

TRAPPED STREET INLET BRICK CONSTRUCTION	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. WSH/SAM Ch. JCK	2000	SHEET 26

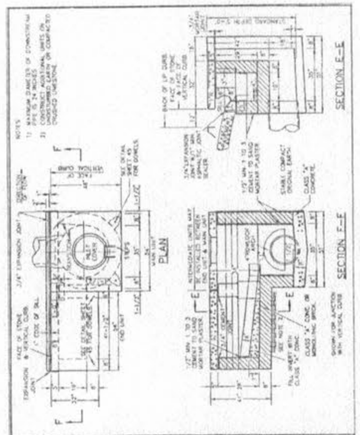

MULTIPLE STREET INLET BRICK CONSTRUCTION	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. DAB/SAM Ch. JCK	2000	SHEET 27

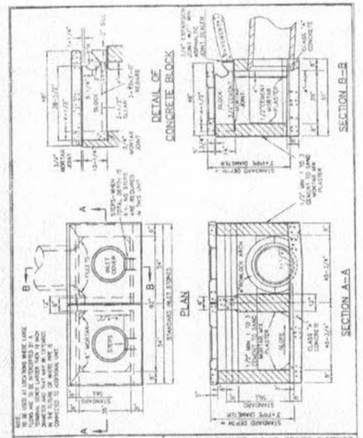

DOUBLE UNTRAPPED STREET INLET BRICK CONSTRUCTION	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. DAB/SAM Ch. JCK	2000	SHEET 28

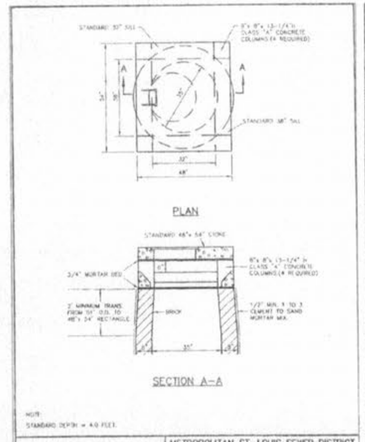

NOTE:
STANDARD DEPTH = 4.0 FEET.

AREA INLET OPEN 4 SIDES BRICK CONSTRUCTION	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. R.O.W. Ch. J.C.P.	2000	SHEET 29

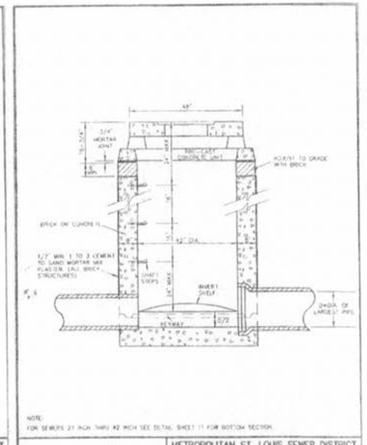

NOTE:
FOR SEWERS 27 INCH THRU 42 INCH SEE DETAIL SHEET 11 FOR BOTTOM SECTION.

AREA INLET MANHOLE (12" THRU 24")	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. WSH/SAM Ch. JCK	2000	SHEET 30

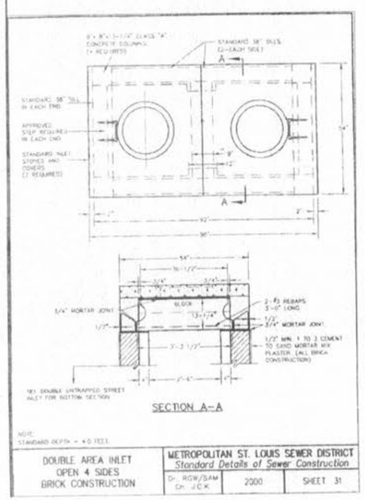

NOTE:
STANDARD DEPTH = 4.0 FEET.

DOUBLE AREA INLET OPEN 4 SIDES BRICK CONSTRUCTION	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. ROW/SAM Ch. JCK	2000	SHEET 31

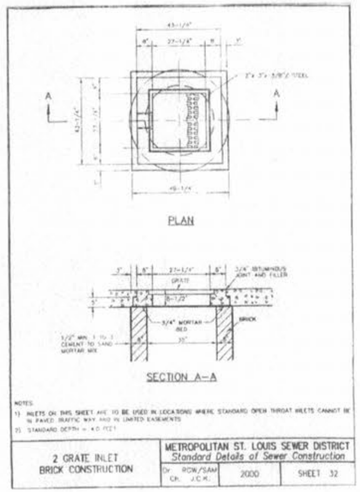

NOTES:
1) INLETS ON THIS SHEET ARE TO BE USED IN LOCATIONS WHERE STANDARD OPEN THROAT INLETS CANNOT BE IN PAVED TRAFFIC WAY AND IN LIMITED EASEMENTS
2) STANDARD DEPTH = 4.0 FEET

2 GRATE INLET BRICK CONSTRUCTION	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. ROW/SAM Ch. JCK	2000	SHEET 32

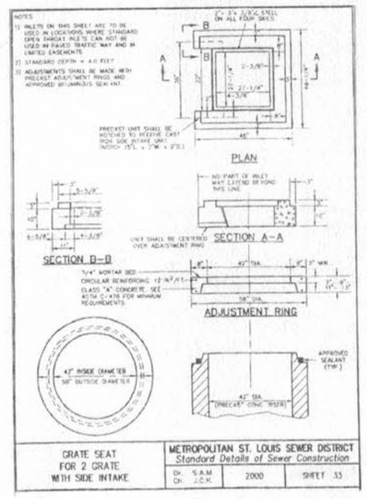

NOTES:
1) INLETS ON THIS SHEET ARE TO BE USED IN LOCATIONS WHERE STANDARD OPEN THROAT INLETS CANNOT BE USED IN PAVED TRAFFIC WAY AND IN LIMITED EASEMENTS
2) STANDARD DEPTH = 4.0 FEET
3) ADJUSTMENTS SHALL BE MADE WITH PRECAST ADJUSTMENT RINGS AND APPROVED BITUMINOUS SEALANT.

CRATE SEAT FOR 2 GRATE WITH SIDE INTAKE	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. S.A.M. Ch. J.C.K.	2000	SHEET 33

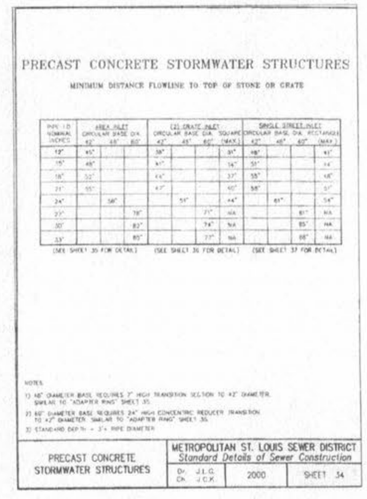

PRECAST CONCRETE STORMWATER STRUCTURES

MINIMUM DISTANCE FLOWLINE TO TOP OF STONE OR GRATE

PIPE I.D. NOMINAL (INCHES)	AREA INLET CIRCULAR GRADE DIA. 42"	48"	60"	(2) GRATE INLET* CIRCULAR BASE DIA. SQUARE 42"	48"	60"	SINGLE STREET INLET CIRCULAR BASE DIA. RECTANGLE 42"	48"	60" (MAX.)
12"	45"			38"			51"	48"	45"
15"	48"			41"			54"	51"	48"
18"	51"			44"			57"	55"	48"
21"	55"			47"			60"	58"	51"
24"		58"			53"		64"	61"	54"
27"			78"			71"	NA	67"	NA
30"			83"			74"	NA	85"	NA
33"			85"			77"	NA	88"	NA

(SEE SHEET 35 FOR DETAIL) (SEE SHEET 35 FOR DETAIL) (SEE SHEET 37 FOR DETAIL)

NOTES:
1) 48" DIAMETER BASE REQUIRES 3' HIGH TRANSITION SECTION TO 42" DIAMETER. SIMILAR TO "ADAPTER RING" SHEET 35.
2) 60" DIAMETER BASE REQUIRES 24" HIGH CONCENTRIC REDUCER TRANSITION TO 42" DIAMETER. SIMILAR TO "ADAPTER RING" SHEET 35.
3) STANDARD DEPTH = 3'+ PIPE DIAMETER

PRECAST CONCRETE STORMWATER STRUCTURES	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. J.I.G. Ch. J.C.K.	2000	SHEET 34

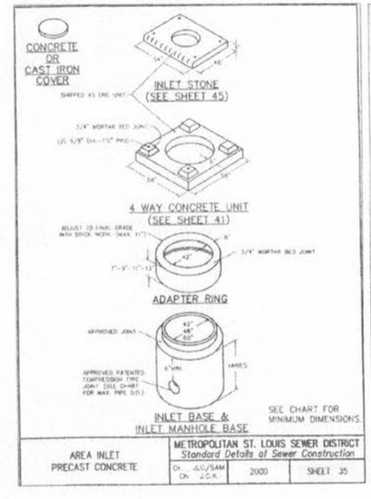

AREA INLET PRECAST CONCRETE	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. A.C./SAM Ch. J.C.K.	2000	SHEET 35

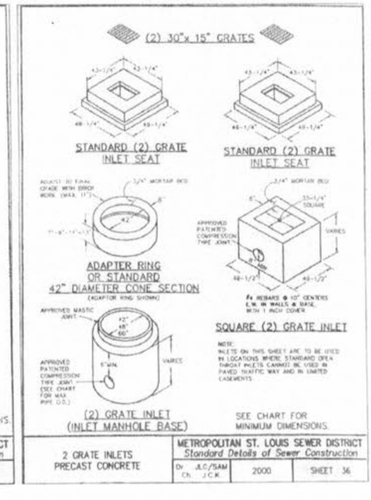

2 GRATE INLETS PRECAST CONCRETE	METROPOLITAN ST. LOUIS SEWER DISTRICT Standard Details of Sewer Construction		
	Dr. A.C./SAM Ch. J.C.K.	2000	SHEET 36

BASE MAP

ISSUE	REMARKS/DATE
1	05-14-03 1st Submittal
2	06-24-03 City of O'Fallon Comments

PREPARED FOR:
McBride & Son Homes, Inc.
#1 McBride & Son Center Drive
Chesterfield, Missouri 63005
(636) 537-2000

PREPARED BY:
THE STERLING CO
ENGINEERS & SURVEYORS
5055 NEW BAUMGARTNER ROAD
ST. LOUIS, MISSOURI 63129
(314) 487-0440 FAX 487-8844
E-Mail: Sterling@corvair.net

DRAWN: DESIGNED: CHECKED:

PROJECT: BRIARCHASE PHASE TWO

SHEET TITLE: CONSTRUCTION DETAILS

NO. 02 03 043
M.S.D. P#
SHEET CD4 OF
DIGITAL FILE LOCATION
S:\ENGR\STERLING-2\DGN\Details.DWG