

CONSTRUCTION SEQUENCE

- CONTRACTOR TO CONDUCT A PRE-CONSTRUCTION MEETING.
- CONTRACTOR TO POST A SIGN WITH NAME AND PHONE NUMBER OF ESC RESPONSIBLE PARTY.
 INSTALL INLET PROTECTION ON ALL EXISTING STORM SEWER INLETS LOCATED ON OR ADJACENT TO THE
- PROPERTY AS INDICATED ON THE DRAWING AND THE DETAIL ON SHEET C6.1.

 INSTALL TEMPORARY CONSTRUCTION ENTRANCE.
- INSTALL TEMPORARY 18" SILT FENCE AROUND DISTURBED LIMITS AS INDICATED ON DRAWING AND THE DETAIL ON SHEET C6.1.
- BRING THE PROPOSED BUILDING PAD TO FINAL GRADE. PREPARE PADS FOR BUILDING CONSTRUCTION.
 INSTALLATION OF THE WATER LATERAL, SANITARY SEWER LATERAL, STORM SEWERS, STORM INLETS, GAS,
- ELECTRIC, TELEPHONE, AND CABLE LINES/CONDUIT MAY BEGIN AS SHOWN ON THE UTILITIES PLAN.
- IMMEDIATELY INSTALL TEMPORARY INLET PROTECTION ON ALL NEWLY INSTALLED STORM SEWER INLETS AS INDICATED ON DRAWING AND THE DETAIL ON SHEET C6.1.
 INSTALLATION OF PROPOSED CONCRETE CURBING AND SIDEWALK ONCE SITE GRADING FOR THESE AREAS ARE
- FINALIZED. ONCE CURBING IS IN PLACE, ALL UPSTREAM PROPOSED GRASS AREAS SHALL BE STABILIZED AS SOON AS POSSIBLE WITH THE REQUIRED FOUR INCHES OF TOPSOIL, PERMANENT SEEDING AND STRAW MULCH OR MATTING TO COVER THE SEED.

 INSTALL NEW ASPHALT IN AREAS INDICATED. RESURFACE ENTIRE PARKING AREA AS INDICATED IN DRAWING.
- IMMEDIATELY AFTER EARTH DISTURBANCE ACTIVITIES CEASE IN ANY AREA OR SUB-AREA OF THE PROJECT,
 THE OPERATOR SHALL STABILIZE ALL DISTURBED AREAS. COVER ALL AREAS THAT WILL NOT BE WORKED ON
 FOR MORE THAN SEVEN DAYS DURING THE DRY SEASON OR TWO DAYS DURING THE WET SEASON WITH STRAW
 OR MULCH. STABILIZE ALL AREAS THAT REACH FINAL GRADE WITHIN SEVEN DAYS. SEED OR SOD ANY AREAS
 THAT WILL NOT BE WORKED ON FOR MORE THAN 30 DAYS.
- ONCE CONSTRUCTION IS COMPLETE, ALL DISTURBED AREAS MUST BE STABILIZED AND BMPS CAN BE REMOVED ONCE STABILIZATION IS COMPLETE.

SEDIMENT AND EROSION CONTROL NOTES:

- ALL SEDIMENT AND EROSION CONTROL PRACTICES SHALL BE IN COMPLIANCE WITH CITY OF O'FALLON, ST.
- CHARLES COUNTY, MISSOURI AND THE MISSOURI DEPARTMENT OF NATURAL RESOURCES.

 CONTRACTOR SHALL SWEEP/REMOVE ALL SEDIMENT AND DEBRIS WITHIN THE ROADWAY AT THE END OF EACH
- MINIMIZE THE EXTEND AND DURATION OF THE DEVELOPMENT AREA EXPOSED AT ONE TIME.
- REMOVE SEDIMENT FROM BMPS AS APPROPRIATE AND PROPERLY DISPOSE OF SEDIMENT INTO CONTROLLED AREAS TO PREVENT SOIL FROM RETURNING TO THE BMP DURING SUBSEQUENT RAIN EVENTS.
- REMOVE SEDIMENT FROM PAVED ROADWAYS AND FROM AROUND BMPS PROTECTING STORM DRAIN INLETS.

 PERILAGE BAMAGER RANGE SHOULD AS OUT FEMALES. THAT NO LONGER OF PATE FEED TO VELY.


 **THE PARTY OF THE PAR
- REPLACE DAMAGED BMPS, SUCH AS SILT FENCES, THAT NO LONGER OPERATE EFFECTIVELY.
 AFTER THE PROJECT IS FULLY STABILIZED TEMPORARY SEDIMENT AND EROSION CONTROL DEVICES MAY BE
- REMOVED. FULLY STABILIZED IS 70% COVERAGE OF VEGETATIVE COVER ON NON-PAVED AREAS.

 THE IMPLEMENTAITON OF THESE EROSION CONTROL PLANS AND THE CONSTRUCTION, MAINTENANCE, REPLACEMENT AND UPGRADING OF THESE EROSION CONTROL FACILITIES IS THE RESPONSIBILITY OF THE
- CONTRACTOR/EROSION CONTROL RESPONSIBLE PARTY UNTIL ALL CONSTRUCTION IS APPROVED. THE CONTRACTOR IS ALSO RESPONSIBLE FOR ALL EROSION AND SEDIMENT CONTROL PERMITTING.

 THE EROSION CONTROL FACILITIES SHOWN ON THIS PLAN ARE THE MINIMUM REQUIREMENTS FOR
- ANTICIPATED CONSTRUCTION ACTIVITIES. DURING THE CONSTRUCTION PERIOD, THESE EROSION CONTROL FACILITIES SHALL BE UPGRADED AS NEEDED AND MODIFIED TO ACCOUNT FOR CHANGING SITE CONDITIONS.

 THE EROSION CONTROL FACILITIES ON INACTIVE SITES SHALL BE INSPECTED AND MAINTAINED A MINIMUM OF
- ONCE A MONTH OR WITHIN 24 HOURS FOLLOWING A STORM EVENT.

 INSPECTIONS SHOULD BE COMPLETED AND CONDUCTED BY QUALIFIED INSPECTORS WHO ARE FAMILIAR WITH THE EROSION CONTROL PLAN AND THE BMPS IMPLEMENTED AT THE SITE. IN GENERAL, IF INSPECTIONS
- INDICATE THAT A BMP IS NOT OPERATING PROPERLY, IT IS RECOMMENDED THAT MAINTENANCE AND MODIFICATION OF THE BMP BE PERFORMED AS SOON AS POSSIBLE AND BEFORE THE NEXT STORM EVENT WHENEVER PRACTICABLE AND N LATER THAN SEVEN (7) CALENDAR DAYS FROM THE INSPECTION DATE, TO ENSURE ITS CONTINUED EFFECTIVENESS. MINIMUM MAINTENANCE STANDARDS FOR EACH SPECIFIC BMP ARE INCLUDED IN THE EROSION CONTROL PLAN.
- A COPY OF THE EROSION CONTROL PLAN.
 A COPY OF THE EROSION CONTROL PLAN SHALL BE KEPT ON SITE AT ALL TIMES DURING CONSTRUCTION AND MAKE THE PLAN AVAILABLE FOR REVIEW BY A FIELD REPRESENTATIVE UPON REQUEST.

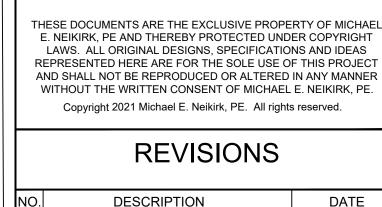


NO.	DESCRIPTION	DATE

MICHAEL E. NEIKIRK PE

Civil Engineer
306 North Market Street, Ste 101
Mt. Carmel, IL 62863
Phone: (618) 263-4100

SCALE:	1"=20'
DRAWN BY:	RM
DESIGNER:	TJL,RM
CHECKED BY:	TJL
ENGINEER:	Michael E. Neikirk
ARCHITECT:	IDesign
OWNER:	Bluegrass Hospitality Group

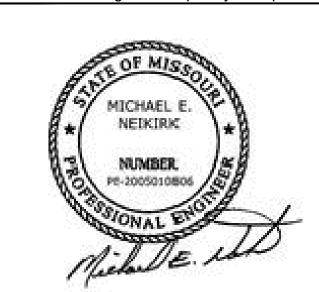

CERTIFIED BY

100 TITL F

DRAKE'S RESTAURANT 900 HIGHWAY K O'FALLON, MO


RAWING TITL

EROSION CONTROL PLAN

FILE LOCATION

C6.0

NUMBER REV#

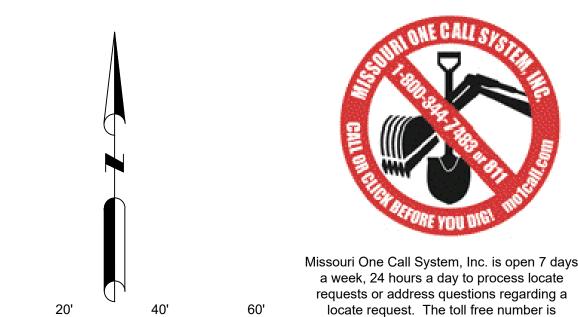

1-800-344-7483 or 811 (the National three digit call before you dig phone number).