
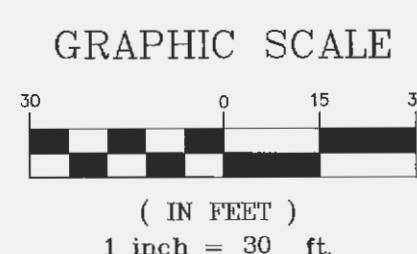


LOT 1  
NORTH CENTRAL INDUSTRIAL PARK  
BOUNDARY ADJUSTMENT LOTS 1-4  
ZONED I-1

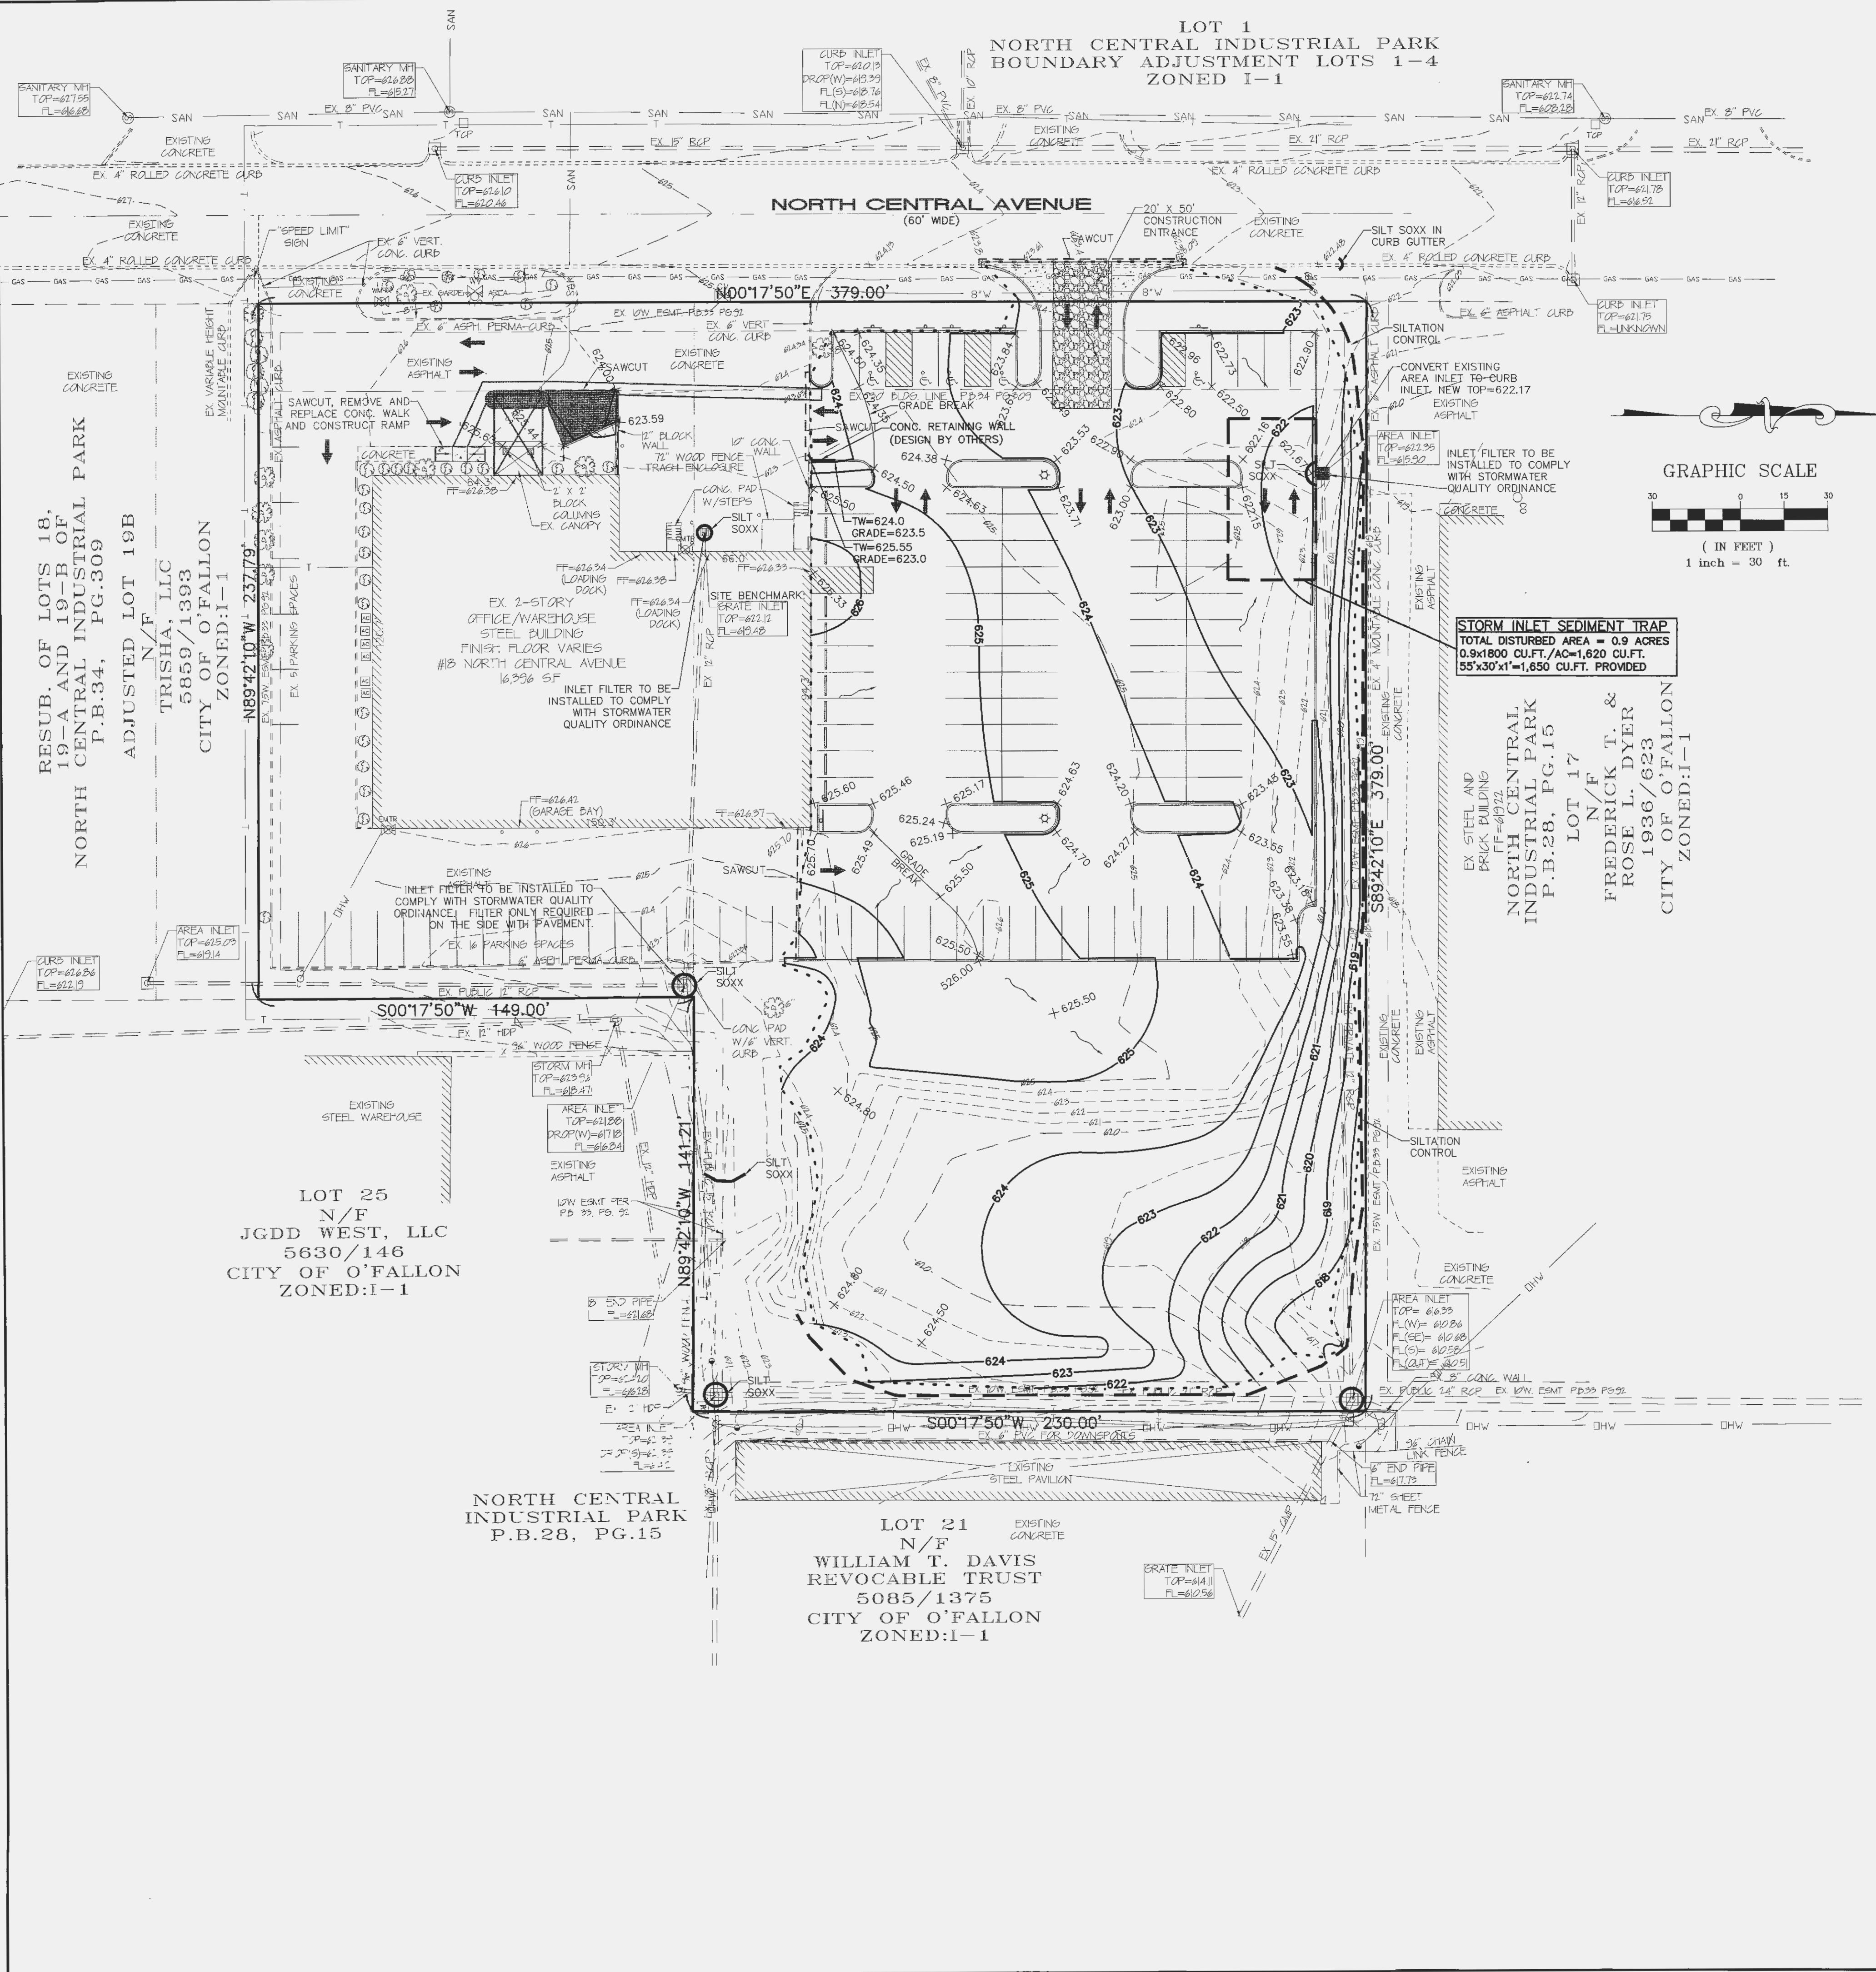

**STORM INLET SEDIMENT TRAP**  
TOTAL DISTURBED AREA = 0.9 ACRES  
0.9x1800 CU.FT./AC=1,620 CU.FT.  
55'x30'x1'-1,650 CU.FT. PROVIDED

**STORM WATER POLLUTION PREVENTION PLAN**

**A. PURPOSE:**  
The purpose of the Storm Water Pollution Prevention Plan (SWPPP) is to inform the Developer/Contractor of the following objectives they are required to meet:  
- Prevent erosion where construction activities shall occur.  
- Prevent pollutants from mixing with storm water.  
- Prevent pollutants from being discharged by trapping them on-site, before they can affect the receiving waters.  
- All regulations of Missouri Department of Natural Resources are met.  
- All regulations of the Environmental Protection Agency are met.  
- All regulations of the local municipality are met.

**B. PROJECT DESCRIPTION:**  
The project is located in the Perdue Creek watershed in St. Charles County, Missouri. The project disturbs approximately 1.58 acres.  
The project activities consist of the construction of a new parking lot and building canopy. The site will be protected by the various erosion protection measures listed below:

- 1. Siltation Control:** The entire perimeter of the project that allows storm water to exit will have siltation control installed. Details of these devices are depicted on the detail plans prepared by Box Engineering Company, Inc.
- 2. Stabilized Construction Entrances:** A stabilized construction entrance will be installed at the site staging areas to prevent sediment from being tracked onto public roads. The entrance shall consist of 2"-3" washed stone 6" thick. A detail of the stabilized construction entrance is included with the grading plans.
- 3. Revegetation:** The site will consist of varying ground slopes, upon completion of the grading activities the slope prone to erosion will be seeded and stowed to stabilize the slope and prevent erosion.

**C. MAINTENANCE AND INSPECTION:**

**Regular Maintenance:** Weekly inspections of the project will include: (a) The repair of any sediment (silt) fence and/or staked straw bale barriers damaged or out of place; (b) The removal of any accumulated trash and/or debris; and (c) The removal of any externally deposited waste materials.

**Periodic Inspections:** Following each rain of more than 0.50 inch in 24 hours, the site will be inspected, and any necessary maintenance will be provided for a period of one year following the completion of the above remediation measures. Summaries of the maintenance and the inspections will be maintained and shall be kept available from the owner. An inspection report shall be filed and kept on site for every inspection. The report shall detail the findings of the inspection and if any action was required. The inspection form needs to include, name of the site, name of the inspector, permit number, date of inspection, major observations and actions taken to correct problems and the signature of the inspector. The inspection reports need to be kept on file by the permittee for three years after the project is completed.

The field inspections will be conducted in a systematic manner to minimize the possibility of any significant feature being overlooked. A detailed checklist will be developed and followed for the examination. Particular attention will be given to detecting evidence of erosion, slope instability, undue settlement, displacement, and tilting. Photographs and drawings will be used freely to record conditions in order to minimize descriptions. The field inspection will include appropriate features and items, including potential hazards to human life or property.

The condition of the slopes and vegetative cover will be evaluated and examined for erosion.

Measures will be taken to promote the growth of vegetation and repair of damage caused by erosion and sedimentation. The inspection will also provide recommendations for measures that need to be undertaken immediately, based on the experience and judgment of the inspector. Necessary follow up inspections will be made as necessary to verify that any maintenance, alteration, or repair measures are accomplished by methods acceptable by standard engineering practice.

**Table 60-5 Soil Stabilization Schedule**

Soil Disturbance Activity or Condition	Required Stabilization Time
Soil disturbance has caused in areas greater than 2,000 square feet.	14 days
After construction of dikes, swales, diversions, and other concentrated flow areas	5 days
When slopes are steeper than 3 horizontal to 1 vertical	7 days
When slopes are greater than 3% and longer than 150 feet.	14 days
Perimeter controls around soil stockpiles.	End of workday
Stabilization or covering of inactive stockpiles.	30 days
When land disturbance is completed, permanent soil stabilization must be installed.	30 days

**SPILL AND SITE POLLUTION:**  
SHOULD AN ACCIDENTAL SPILL OCCUR REFER TO MATERIAL SAFETY DATA SHEETS. ANY SPILLS OF HAZARDOUS MATERIALS IN QUANTITIES IN EXCESS OF REPORTABLE QUANTITIES AS DEFINED BY EPA OR THE STATE AGENCY REGULATIONS, SHALL BE IMMEDIATELY REPORTED TO THE EPA NATIONAL RESPONSE CENTER (800-424-8802) AND MISSOURI DEPARTMENT OF NATURAL RESOURCES (573-634-2436). REPORTABLE SPILLS FOR PETROLEUM PRODUCTS IS GREATER THAN 50 GALLONS. ALL OTHER REPORTABLE HAZARDOUS MATERIALS AND THEIR QUANTITIES MAY BE FOUND NOT BE WEB SITE AT [HTTP://WWW.DNR.MO.GOV](http://www.dnr.mo.gov) AN THE LOCAL NUMBER IS 573-840-9750. FEDERAL LAW REQUIRES THE RESPONSIBLE PARTY TO REPORT ANY RELEASE OF OIL IF IT REACHES OR THREATENS A SEWER, LAKE, CREEK, STREAM, RIVER, GROUNDWATER, WETLANDS, OR AREA LIKE A ROAD DITCH, THAT DRAINS INTO THE ABOVE.

AN EMERGENCY SPILL KIT IS REQUIRED TO BE ONSITE.

**STORM WATER POLLUTION PREVENTION PLAN SITE NOTES:**

1. A Pre-Construction conference will be scheduled with the City prior to the start of construction activities, including installation of the temporary construction entrance. The permittee will be responsible for notifying all contractors and other entities including utility crews that will perform work at the site to be in attendance.
2. The contractor shall install perimeter siltation control (silt fencing) and install the construction entrance.
3. Site then shall be cleared and stripped.
4. Contractor shall install additional silt fencing and any other sediment control measures as needed in order to control siltation on site.
5. Contractor shall maintain all siltation control devices and provide inspection reports as outlined.
6. Contractor shall finish grade all areas as soon as practical and establish permanent vegetation and/or install erosion control matting as shown.
7. During construction of site, the contractor shall maintain all drainage and erosion control structures as needed.
8. Contractor shall finish grade and install any final erosion control measures as project is completed as well as all permanent landscaping.
9. Contractor to notify City 2 days prior to start of any site work.

**PROJECT TITLE:**  
INQUIRY INTELLIGENCE SYSTEMS

**ENGINEERING PLANNING SURVEYING**  
221 Point West Blvd.  
St. Charles, MO 63301  
636-928-5562  
FAX 928-1718



**DISCLAIMER OF RESPONSIBILITY**  
I hereby specify that the documents intended to be authorized by my seal are limited to this sheet, and I hereby disclaim any responsibility for all other Drawings, Specifications, Estimates, Reports or other documents or instruments relating to or intended to be used for any part of the project, the architectural or engineering project.

**LARRY DAVID WALKER**  
Professional Engineer  
No. PE-2007020343  
Civil Engineer  
2007020343

Copyright 2014  
Box Engineering Company, Inc.  
Engineering Authority No. 000655  
Surveying Authority No. 000144  
All Rights Reserved.

**REVISIONS**

DATE	REVISION
05/01/14	CITY COMMENTS
05/13/14	CITY COMMENTS

**Developer / Owner:**  
INQUIRY INTELLIGENCE SYSTEMS  
18 NORTH CENTRAL AVENUE  
O'FALLON, MO 63366  
(636) 240-1800

**GRADING PLAN**

**P+Z No.** #20-14.01  
**City No.** #14-163  
**Page No.** 5 of 9

UNDERGROUND UTILITIES HAVE BEEN PLOTTED FROM AVAILABLE INFORMATION AND THEREFORE THEIR LOCATIONS SHALL BE CONSIDERED APPROXIMATE ONLY. THE VERIFICATION OF THE LOCATION OF ALL UNDERGROUND UTILITIES, EITHER SHOWN OR NOT SHOWN ON THESE PLANS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, AND SHALL BE LOCATED PRIOR TO ANY GRADING OR CONSTRUCTION OF THE IMPROVEMENTS.